

FEATURES

- LOW PROFILE (20mm HEIGHT)
- EXTENDED TEMPERATURE RATING +105°C
- LOW DISSIPATION FACTOR AND LOW ESR
- HIGH RIPPLE CURRENT
- WIDE CV SELECTION
- SUITABLE FOR SWITCHING POWER SUPPLIES

**RoHS
Compliant**

includes all homogeneous materials

*See Part Number System for Details



SPECIFICATIONS

Operating Temperature Range			-40 ~ +105°C					-25 ~ +105°C	
Rated Voltage Range			16 ~ 250Vdc					400Vdc	
Rated Capacitance Range			68 ~ 10,000μF					33 ~ 100μF	
Capacitance Tolerance			±20% (M)						
Max. Leakage Current (μA) After 5 minutes (20°C)			3 x C(μF)V						
Max. Tan δ at 120Hz/20°C	W.V. (Vdc)		16	25	35	50	63	80	100 ~ 400
	Tan δ max.		0.45	0.35	0.30	0.25	0.20	0.17	0.15
Surge Voltage	W.V. (Vdc)		16	25	35	50	63	80	100
	S.V. (Vdc)		20	32	44	63	79	100	125
	W.V. (Vdc)		160	200	250	400	400	-	-
	S.V. (Vdc)		220	250	300	400	450	-	-
Ripple Current Correction Factors	Frequency (Hz)		50	60	100	120	500	1K	10K ~ 50K
	Multiplier at 105°C	16 ~ 100Vdc	0.93	0.95	0.99	1.00	1.05	1.08	1.15
		160 ~ 400Vdc	0.75	0.80	0.95	1.00	1.20	1.25	1.40
Low Temperature Stability (16 to 250Vdc)	Temperature (°C)		0	-25	-40	-	-	-	-
	Capacitance Change		-5%	-10	-30%	-	-	-	-
	Impedance Ratio		1.5	3	9	-	-	-	-
Load Life Test 2,000 hours at +105°C	Capacitance Change		Within ±20% of initial measured value						
	Tan δ		Less than 200% of specified maximum value						
	Leakage Current		Less than specified maximum value						
Shelf Life Test 1,000 hours at +105°C (no load)	Capacitance Change		Within ±20% of initial measured value						
	Tan δ		Less than 200% of specified maximum value						
	Leakage Current		Less than specified maximum value						
Surge Voltage Test Per JIS-C-5141 (table #6, #4) Surge voltage applied: 30 seconds "On" and 5.5 minutes no voltage "Off"	Capacitance Change		Within ±20% of initial measured value						
	Tan δ		Less than 200% of specified maximum value						
	Leakage Current		Less than specified maximum value						
Soldering Effect Refer to MIL-STD-202F Method 210A	Capacitance Change		Within ±10% of initial measured value						
	Tan δ		Less than specified maximum value						
	Leakage Current		Less than specified maximum value						

MECHANICAL CHARACTERISTICS:


*NON-STANDARD VOLTAGES FOR THIS SERIES

1. Pressure Vent:

The capacitors are provided with a pressure sensitive safety vent on the top of can. The vent is designed to rupture in the event that high internal gas pressure is developed by circuit malfunction or mis-use like reverse voltage.

2. Terminal Strength:

Each terminal of the capacitor shall withstand an axial pull force of 4.5Kg for a period 10 seconds or a radial bent force of 2.5Kg for a period of 30 seconds.

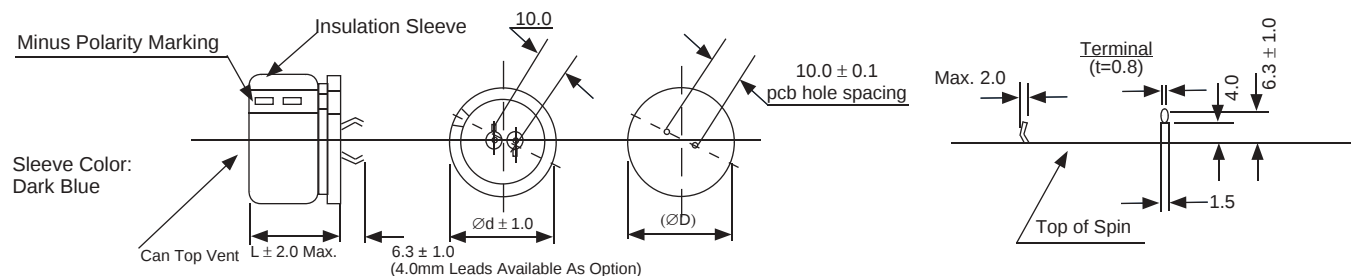

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



STANDARD PRODUCT LIST, CASE SIZE AND SPECIFICATIONS

W.V.	Cap (μ F)	Case Size	ESR (Ω @ 20°C)		Max. Ripple Current (Arms@85°C)	
			120Hz	20KHz	120Hz	10K ~ 50KHz
16	3,300	22x20	0.216	0.173	1.30	1.50
	4,700	25x20	0.152	0.121	1.60	1.84
	6,800	30x20	0.105	0.084	1.80	2.078
	10,000	35x20	0.071	0.057	2.40	2.76
25	2,200	22x20	0.241	0.181	1.30	1.50
	3,300	25x20	0.161	0.121	1.60	1.84
	4,700	30x20	0.113	0.085	1.80	2.07
	6,800	35x20	0.080	0.060	2.30	2.65
35	1,500	22x20	0.267	0.216	1.10	1.27
	2,200	25x20	0.196	0.140	1.40	1.61
	3,300	30x20	0.131	0.098	1.70	1.96
	4,700	35x20	0.095	0.071	2.00	2.30
50	1,000	30x20	0.265	0.199	0.90	1.04
	1,500	25x20	0.177	0.133	1.20	1.38
	2,200	30x20	0.121	0.089	1.40	1.61
	3,300	35x20	0.085	0.064	1.70	1.96
63	680	22x20	0.463	0.347	0.90	1.04
	1,000	25x20	0.315	0.236	1.20	1.38
	1,500	30x20	0.210	0.157	1.30	1.50
	2,200	35x20	0.143	0.107	1.50	1.70
80	470	22x20	0.459	0.298	0.80	0.92
	680	25x20	0.317	0.206	1.00	1.15
	1,000	30x20	0.216	0.140	1.20	1.38
	1,500	35x20	0.155	0.108	1.40	1.61
100	330	22x20	0.653	0.392	0.80	1.20
	470	25x20	0.459	0.275	1.00	1.50
	680	30x20	0.317	0.190	1.10	1.65
	1,000	35x20	0.216	0.129	1.20	1.80
160	150	22x20	1.437	0.647	0.55	0.77
	220	25x20	0.098	0.441	0.75	1.05
	330	30x20	0.553	0.249	1.00	1.40
	470	35x20	0.459	0.208	1.15	1.61
200	100	22x20	1.989	0.895	0.50	0.70
	150	25x20	1.326	0.597	0.65	0.91
	220	30x20	0.904	0.407	0.87	1.22
	330	35x20	0.603	0.271	1.10	1.54
250	68	22x20	2.926	1.463	0.40	0.56
	100	25x20	1.989	0.995	0.50	0.70
	150	30x20	1.326	0.663	0.65	0.91
	220	35x20	0.904	0.452	0.87	1.22
400	33	22x20	5.024	1.758	0.20	0.28
	47	25x20	3.527	1.235	0.25	0.35
	68	30x20	2.438	0.853	0.35	0.49
	100	35x20	1.658	0.580	0.47	0.66

PART NUMBER SYSTEM

NRLFW 102 M 50V 22X20 F
 └─ Series └─ Capacitance Code └─ Tolerance Code └─ Voltage Rating └─ Case Size (mm) └─ RoHS compliant