
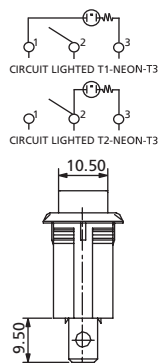




Rocker Switches

31.5 x 17 mm SP illuminated Rocker Switches



RK10 Series

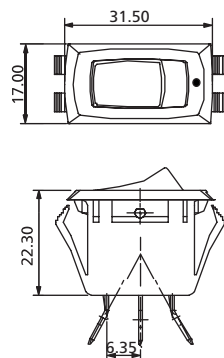



RK10_Q63AUAC_E

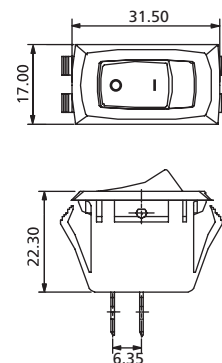

RK10_Q60CNA0A




RK10_Q60AUAC_A

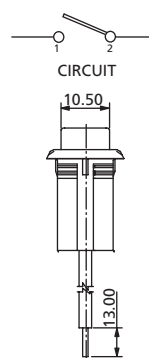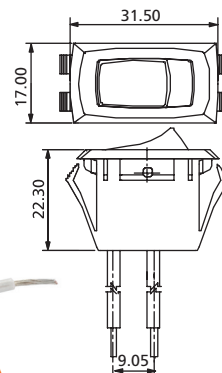

RK10_WR0ANAA0A

TERMINAL



Q6 6.3mm TAB,
0.8mm THICK
(LONG)



Q7 6.3mm TAB,
0.8mm THICK
(SHORT)





EH Elongate Hole




WR Wire

ACTUATOR MARKING




BASE MARKING



PANEL SIZE

PANEL CUT-OUT
Snap-in mounting



X (Panel thickness)	Dimension Y	Dimension Z
0.75 to 1.25 mm	28.6 +0/-0.1 mm	13.60 +0.1/-0 mm
1.25 to 2 mm	28.8 +0/-0.1 mm	13.60 +0.1/-0 mm
2 to 3 mm	29.2 +0/-0.1 mm	13.60 +0.1/-0 mm

How to order:

RK10 1 2 3 4 5 6 7 8 9

1 POLES & SWITCHING:

S1 Single Pole ON-OFF
S2 Single Pole ON-ON

2 TERMINAL (See above drawings):

Q6 6.3mm TAB, 0.8mm THICK, LONG
Q7 6.3mm TAB, 0.8mm THICK, SHORT
EH Elongate Hole
WR Wire

3 TERMINAL BENDING:

0 No Bending
2 Bend Terminals 1 & 2
3 Bend Terminals 1 & 3

4 ACTUATOR MARKING

(See above drawings):

A **B** **C** **D** **E** **F** **I**

5 ILLUMINATION:

N No Illuminated
U Illuminated

6 BASE COLOR:

A Black
H Grey
B White

7 ACTUATOR COLOR:

A Black
H Grey
B White
C Red
F Green
D Orange

8 NEON LAMP POSITION:

0 None Lighted
1 Lighted T1-NEON-T3
2 Lighted T2-NEON-T3

9 BASE MARKING

(See above drawings):

R **A** **E** **B** **Z**

General Specifications:

FEATURES

- » Single pole Rocker switch up to 15A 125VAC
- » Curve actuator
- » Illuminated or non-illuminated

MATERIALS

- » Contact: Silver alloy
- » Terminals: Silver or tin plated copper
- » Lamp: Neon
- » Spring: Piano wire

MECHANICAL

- » Temperature Range: -20°C to +85°C

ELECTRICAL

- » Electrical Life: 6,000 cycles
- » Rating: 10A250VAC
15A125VAC
- » Initial Contact Resistance: 20mΩ max.
- » Insulation Resistance: 100MΩ min. at 500VDC