
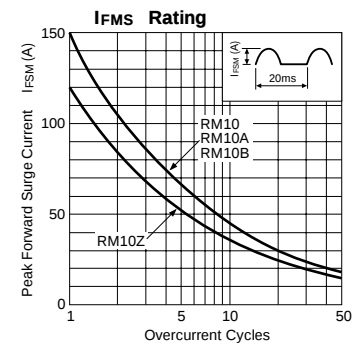
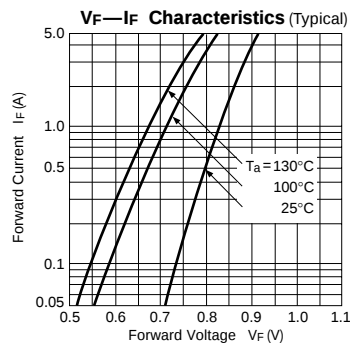





Rectifier Diodes

Parameter Type No.		Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)					Others	
		V _{RM} (V)	I _{F (AV)} (A)	I _{FSM} (A)	T _j (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	R _{th} (j-ℓ)	Mass	Fig.
				50Hz Half-cycle Sinewave Single Shot			max	I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=100°C max	(°C/W)	(g)	
RM 10Z	200	1.5	120	-40 to +150		0.91	1.5	10	50	15	0.4	Ⓐ	
RM 10	400	1.2	150										
RM 10A	600												
RM 10B	800												
RM 2Z	200	1.2	100	-40 to +150		0.91	1.5	10	50	12	0.6	Ⓑ	
RM 2	400												
RM 2A	600												
RM 2B	800												
RM 2C	1000												
RO 2Z	200	1.2	80	-40 to +150		0.92	1.5	10	50	12	0.61		
RO 2	400												
RO 2A	600												
RO 2B	800												
RO 2C	1000												




RM 10 series



RM 2 series

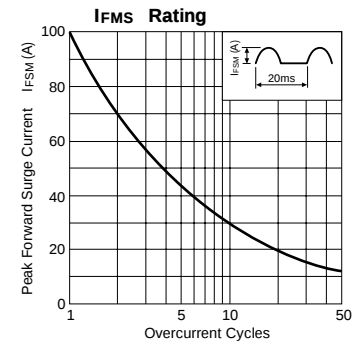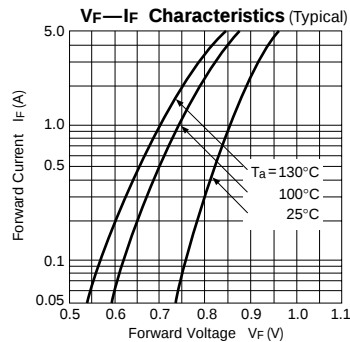

RO 2 series

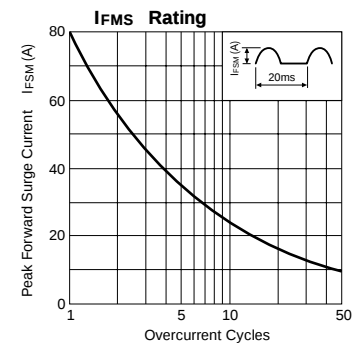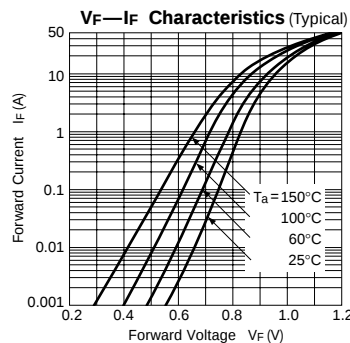

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

