



RS1AL - RS1ML

0.8 AMP. Surface Mount Fast Recovery Rectifiers


Sub SMA

Features

- ✧ For surface mounted application
- ✧ Glass passivated junction chip
- ✧ Built-in strain relief, ideal for automated placement
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-0
- ✧ Fast switching for high efficiency
- ✧ High temperature soldering: 260°C/ 10 seconds at terminals
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.


Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packing: 8mm / 12mm tape per EIA STD RS-481
- ✧ Weight: 0.015 grams

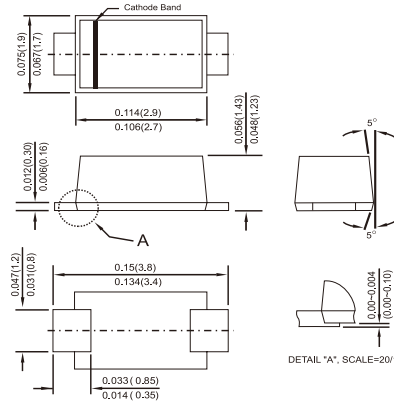

Dimensions in inches and (millimeters)

Marking Diagram



Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	RS 1AL	RS 1BL	RS 1DL	RS 1GL	RS 1JL	RS 1KL	RS 1ML	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 1 @T _L =90°C	I _{F(AV)}	0.8							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	1.3							V
Maximum DC Reverse Current at @ T _A =25°C Rated DC Blocking Voltage (Note 1) @ T _A =125°C	I _R	5 50							uA uA
Maximum Reverse Recovery Time (Note 2)	T _{rr}	150				250	500		nS
Typical Junction Capacitance (Note 3)	C _j	10							pF
Typical Thermal Resistance (Note 4)	R θJA R θJL	105 32							°C /W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

- Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
2. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A
3. Measured at 1 MHz and Applied V_R=4.0 Volts
4. Mounted on P.C.B. with 0.2" x 0.2" (5 mm x 5 mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES (RS1AL THRU RS1ML)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

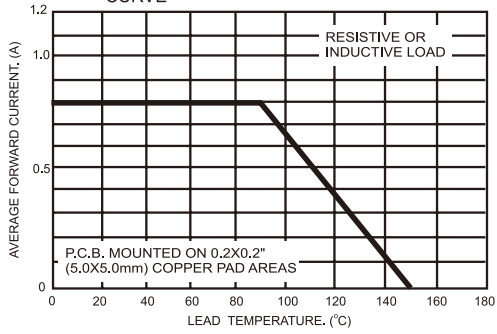


FIG.2- TYPICAL REVERSE CHARACTERISTICS

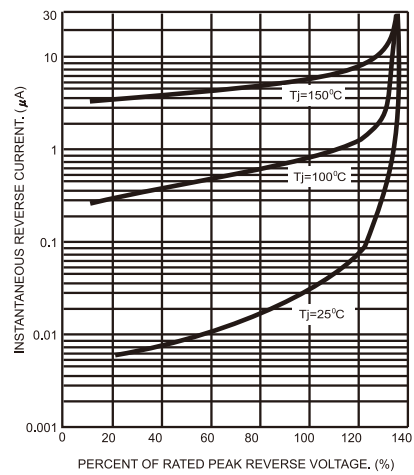


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

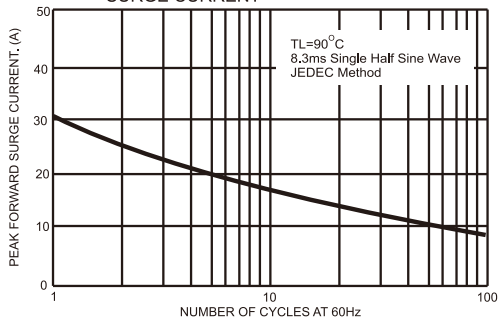


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

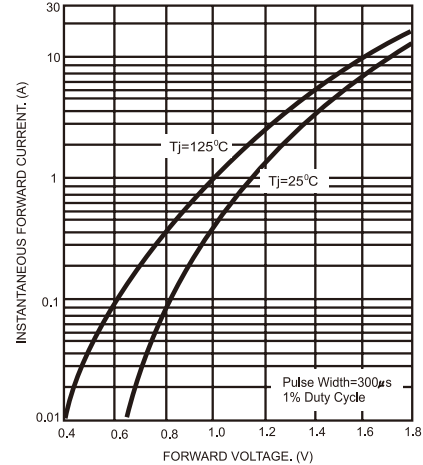


FIG.4- TYPICAL JUNCTION CAPACITANCE

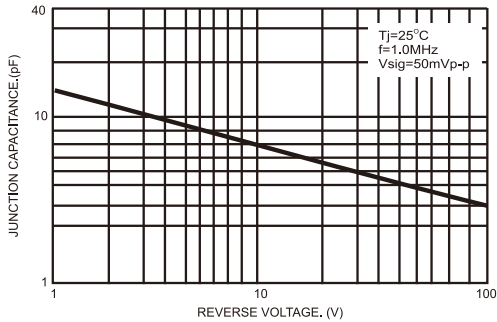


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

