

## 74LCX760

### Low Voltage Buffer/Line Driver with 5V Tolerant Inputs and Open Drain Outputs

#### General Description

The LCX760 is the Open Drain version of the LCX244. The LCX760 contains eight non-inverting buffers with 3-STATE outputs. The device may be employed as a memory address driver, clock driver and bus-oriented transmitter/receiver. The LCX760 is designed for low voltage (2.5V or 3.3V)  $V_{CC}$  applications with capability of interfacing to a 5V signal environment.

The LCX760 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

#### Features

- Open drain version of the LCX244
- 5V tolerant inputs and outputs
- 2.3V–3.6V  $V_{CC}$  specifications provided
- 8.0 ns  $t_{PD}$  max ( $V_{CC} = 3.3V$ ), 10  $\mu A$   $I_{CC}$  max
- Power down high impedance inputs and outputs
- Supports live insertion/withdrawal (Note 1)
- 24 mA output drive ( $V_{CC} = 3.0V$ )
- Implements patented noise/EMI reduction circuitry
- Latch-up conforms to JEDEC JED78
- ESD performance:  
Human body model > 2000V  
Machine model > 200V

**Note 1:** To ensure the high-impedance state during power up or down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pull-up resistor: the minimum value or the resistor is determined by the current-sourcing capability of the driver.


#### Ordering Code:

| Order Number | Package Number | Package Description                                                         |
|--------------|----------------|-----------------------------------------------------------------------------|
| 74LCX760WWM  | M20B           | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide  |
| 74LCX760SJ   | M20D           | Pb-Free 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide       |
| 74LCX760MSA  | MSA20          | 20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide       |
| 74LCX760MTC  | MTC20          | 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide |


Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Pb-Free package per JEDEC J-STD-020B.

#### Logic Symbol



#### Connection Diagram



## Pin Descriptions

| Pin Names                          | Description                  |
|------------------------------------|------------------------------|
| $\overline{OE}_1, \overline{OE}_2$ | 3-STATE Output Enable Inputs |
| $I_0-I_7$                          | Inputs                       |
| $O_0-O_7$                          | Outputs                      |

## Truth Tables

| Inputs            |       | Outputs               |
|-------------------|-------|-----------------------|
| $\overline{OE}_1$ | $I_n$ | (Pins 12, 14, 16, 18) |
| L                 | L     | L                     |
| L                 | H     | H                     |
| H                 | X     | Z                     |

| Inputs            |       | Outputs           |
|-------------------|-------|-------------------|
| $\overline{OE}_2$ | $I_n$ | (Pins 3, 5, 7, 9) |
| L                 | L     | L                 |
| L                 | H     | H                 |
| H                 | X     | Z                 |

H = HIGH Voltage Level  
 L = LOW Voltage Level  
 X = Immaterial  
 Z = High Impedance

| Absolute Maximum Ratings <sup>(Note 2)</sup> |                                  |              |                                                          |       |
|----------------------------------------------|----------------------------------|--------------|----------------------------------------------------------|-------|
| Symbol                                       | Parameter                        | Value        | Conditions                                               | Units |
| V <sub>CC</sub>                              | Supply Voltage                   | −0.5 to +7.0 |                                                          | V     |
| V <sub>I</sub>                               | DC Input Voltage                 | −0.5 to +7.0 |                                                          | V     |
| V <sub>O</sub>                               | DC Output Voltage                | −0.5 to +7.0 | Output in HIGH or LOW State (Note 3)                     | V     |
| I <sub>IK</sub>                              | DC Input Diode Current           | −50          | V <sub>I</sub> < GND                                     | mA    |
| I <sub>OK</sub>                              | DC Output Diode Current          | −50<br>+50   | V <sub>O</sub> < GND<br>V <sub>O</sub> > V <sub>CC</sub> | mA    |
| I <sub>O</sub>                               | DC Output Sink Current           | 50           |                                                          | mA    |
| I <sub>CC</sub>                              | DC Supply Current per Supply Pin | ±100         |                                                          | mA    |
| I <sub>GND</sub>                             | DC Ground Current per Ground Pin | ±100         |                                                          | mA    |
| T <sub>STG</sub>                             | Storage Temperature              | −65 to +150  |                                                          | °C    |

Recommended Operating Conditions (Note 4)

| Symbol          | Parameter                                                            | Min                                                                                             | Max           | Units |
|-----------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------|-------|
| V <sub>CC</sub> | Supply Voltage                                                       | Operating<br>Data Retention                                                                     | 2.0<br>3.6    | V     |
| V <sub>I</sub>  | Input Voltage                                                        | 0                                                                                               | 5.5           | V     |
| V <sub>O</sub>  | Output Voltage                                                       | 0                                                                                               | 5.5           | V     |
| I <sub>OL</sub> | Output Current                                                       | V <sub>CC</sub> = 3.0V – 3.6V<br>V <sub>CC</sub> = 2.7V – 3.0V<br>V <sub>CC</sub> = 2.3V – 2.7V | 24<br>12<br>8 | mA    |
| T <sub>A</sub>  | Free-Air Operating Temperature                                       | −40                                                                                             | 85            | °C    |
| Δt/ΔV           | Input Edge Rate, V <sub>IN</sub> = 0.8V–2.0V, V <sub>CC</sub> = 3.0V | 0                                                                                               | 10            | ns/V  |

Note 2: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The “Recommended Operating Conditions” table will define the conditions for actual device operation.

Note 3: I<sub>O</sub> Absolute Maximum Rating must be observed.

Note 4: Unused inputs or I/Os must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

| Symbol           | Parameter                             | Conditions                                                                                                                          | V <sub>CC</sub>                       | T <sub>A</sub> = −40°C to +85°C |                                  | Units |
|------------------|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------|----------------------------------|-------|
|                  |                                       |                                                                                                                                     | (V)                                   | Min                             | Max                              |       |
| V <sub>IH</sub>  | HIGH Level Input Voltage              |                                                                                                                                     | 2.3 – 2.7<br>2.7 – 3.6                | 1.7<br>2.0                      |                                  | V     |
| V <sub>IL</sub>  | LOW Level Input Voltage               |                                                                                                                                     | 2.3 – 2.7<br>2.7 – 3.6                |                                 | 0.7<br>0.8                       | V     |
| V <sub>OL</sub>  | LOW Level Output Voltage              | I <sub>OL</sub> = 100 μA<br>I <sub>OL</sub> = 8 mA<br>I <sub>OL</sub> = 12 mA<br>I <sub>OL</sub> = 16 mA<br>I <sub>OL</sub> = 24 mA | 2.3 – 3.6<br>2.3<br>2.7<br>3.0<br>3.0 |                                 | 0.2<br>0.6<br>0.4<br>0.4<br>0.55 | V     |
| I <sub>I</sub>   | Input Leakage Current                 | 0 ≤ V <sub>I</sub> ≤ 5.5V                                                                                                           | 2.3 – 3.6                             |                                 | ±5.0                             | μA    |
| I <sub>OZ</sub>  | 3-STATE Output Leakage                | 0 ≤ V <sub>O</sub> ≤ 5.5V<br>V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                                    | 2.3 – 3.6                             |                                 | ±5.0                             | μA    |
| I <sub>OFF</sub> | Power-Off Leakage Current             | V <sub>I</sub> or V <sub>O</sub> = 5.5V                                                                                             | 0                                     |                                 | 10                               | μA    |
| I <sub>CC</sub>  | Quiescent Supply Current              | V <sub>I</sub> = V <sub>CC</sub> or GND<br>3.6V ≤ V <sub>I</sub> , V <sub>O</sub> ≤ 5.5V (Note 5)                                   | 2.3 – 3.6<br>2.3 – 3.6                |                                 | 10<br>±10                        | μA    |
| ΔI <sub>CC</sub> | Increase in I <sub>CC</sub> per Input | V <sub>IH</sub> = V <sub>CC</sub> −0.6V                                                                                             | 2.3 – 3.6                             |                                 | 500                              | μA    |
| I <sub>OHZ</sub> | Off State Current                     | V <sub>O</sub> = 5.5                                                                                                                | 2 - 3.6                               |                                 | 10                               | μA    |

Note 5: Outputs disabled or 3-STATE only.

## AC Electrical Characteristics

| Symbol                                 | Parameter                                     | T <sub>A</sub> = -40°C to +85°C, R <sub>L</sub> = 500Ω |            |                        |     |                              |      | Units |
|----------------------------------------|-----------------------------------------------|--------------------------------------------------------|------------|------------------------|-----|------------------------------|------|-------|
|                                        |                                               | V <sub>CC</sub> = 3.3V ± 0.3V                          |            | V <sub>CC</sub> = 2.7V |     | V <sub>CC</sub> = 2.5V ± 0.2 |      |       |
|                                        |                                               | C <sub>L</sub> = 50 pF                                 |            | C <sub>L</sub> = 50 pF |     | C <sub>L</sub> = 30 pF       |      |       |
|                                        |                                               | Min                                                    | Max        | Min                    | Max | Min                          | Max  |       |
| t <sub>PZL</sub>                       | Propagation Delay                             | 0.5                                                    | 8.0        | 0.5                    | 9.0 | 0.5                          | 10.0 | ns    |
| t <sub>PLZ</sub>                       | Data to Output                                | 0.5                                                    | 7.0        | 0.5                    | 8.0 | 0.5                          | 8.4  |       |
| t <sub>PZL</sub>                       | Output Enable Time<br>OE <sub>n</sub> to Out  | 0.5                                                    | 8.0        | 0.5                    | 9.0 | 0.5                          | 10.0 | ns    |
| t <sub>PLZ</sub>                       | Output Disable Time<br>OE <sub>n</sub> to Out | 0.5                                                    | 7.0        | 0.5                    | 8.0 | 0.5                          | 8.4  | ns    |
| t <sub>OSHL</sub><br>t <sub>OSLH</sub> | Output to Output Skew<br>(Note 6)             |                                                        | 1.0<br>1.0 |                        |     |                              |      | ns    |

**Note 6:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW ( $t_{OSHL}$ ) or LOW-to-HIGH ( $t_{OSLH}$ ).

## Dynamic Switching Characteristics

| Symbol    | Parameter                            | Conditions                                                                                           | $V_{CC}$<br>(V) | $T_A = 25^{\circ}\text{C}$ | Units |
|-----------|--------------------------------------|------------------------------------------------------------------------------------------------------|-----------------|----------------------------|-------|
|           |                                      |                                                                                                      |                 | Typical                    |       |
| $V_{OLP}$ | Quiet Output Dynamic Peak $V_{OL}$   | $C_L = 50\text{ pF}, V_{IH} = 3.3V, V_{IL} = 0V$<br>$C_L = 30\text{ pF}, V_{IH} = 2.5V, V_{IL} = 0V$ | 3.3<br>2.5      | 0.8<br>0.6                 | V     |
| $V_{OLV}$ | Quiet Output Dynamic Valley $V_{OL}$ | $C_L = 50\text{ pF}, V_{IH} = 3.3V, V_{IL} = 0V$<br>$C_L = 30\text{ pF}, V_{IH} = 2.5V, V_{IL} = 0V$ | 3.3<br>2.5      | -0.8<br>-0.6               | V     |

## Capacitance

| Symbol    | Parameter                     | Conditions                                                      | Typical | Units |
|-----------|-------------------------------|-----------------------------------------------------------------|---------|-------|
| $C_{IN}$  | Input Capacitance             | $V_{CC} = \text{Open}, V_I = 0V \text{ or } V_{CC}$             | 7       | pF    |
| $C_{OUT}$ | Output Capacitance            | $V_{CC} = 3.3V, V_I = 0V \text{ or } V_{CC}$                    | 8       | pF    |
| $C_{PD}$  | Power Dissipation Capacitance | $V_{CC} = 3.3V, V_I = 0V \text{ or } V_{CC}, f = 10\text{ MHz}$ | 10      | pF    |



# **Schematic Diagram** Generic for LCX Family (output pull-up circuitry is not applicable to open drain versions)



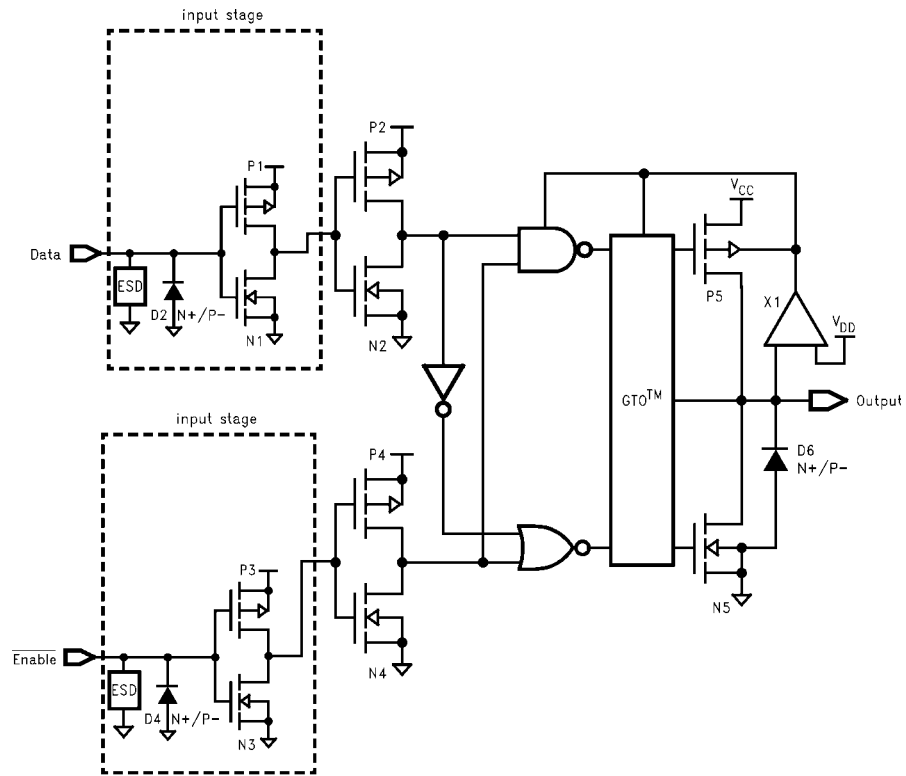



FIGURE 3.

**Physical Dimensions** inches (millimeters) unless otherwise noted


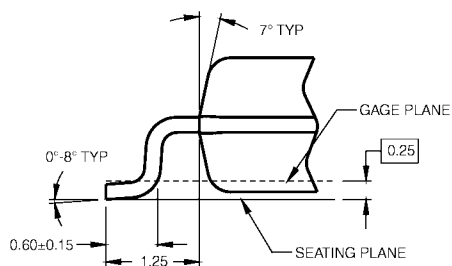
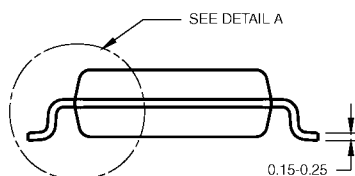
**20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide  
Package Number M20B**

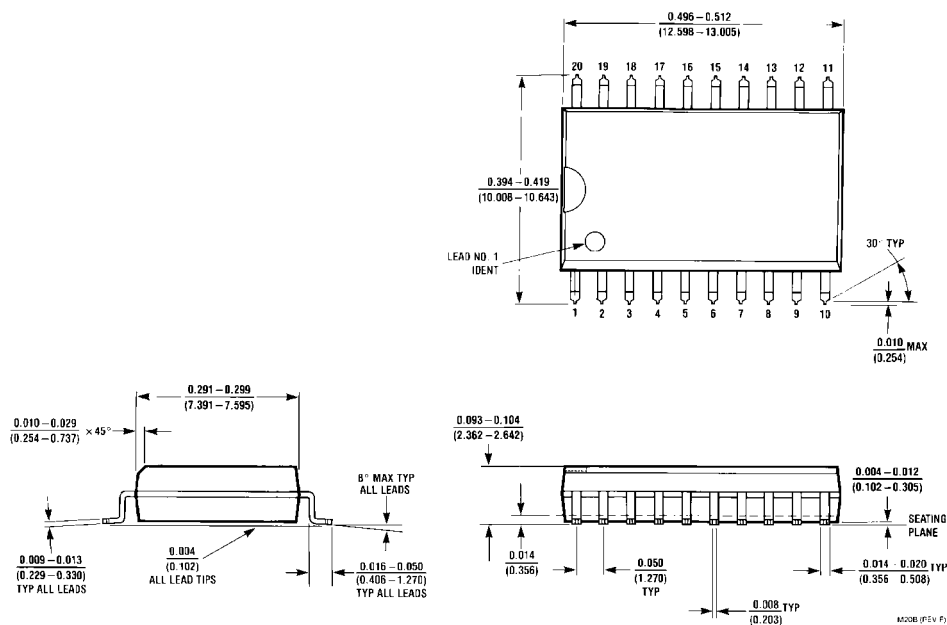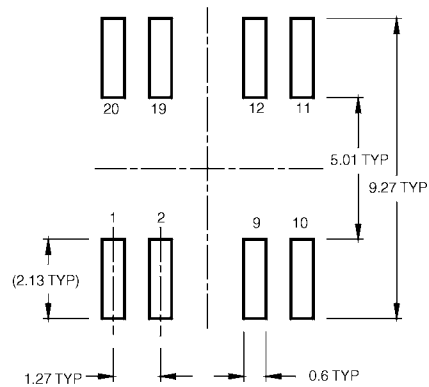

## LAND PATTERN RECOMMENDATION

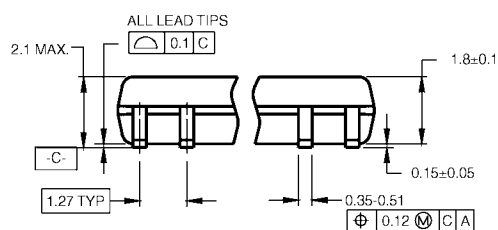

DIMENSIONS ARE IN MILLIMETERS



DETAIL A

NOTES:

A. CONFORMS TO EIAJ EDR-7320 REGISTRATION,  
ESTABLISHED IN DECEMBER, 1998.


B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.

M20DRevB1


**Pb-Free 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide  
Package Number M20D**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

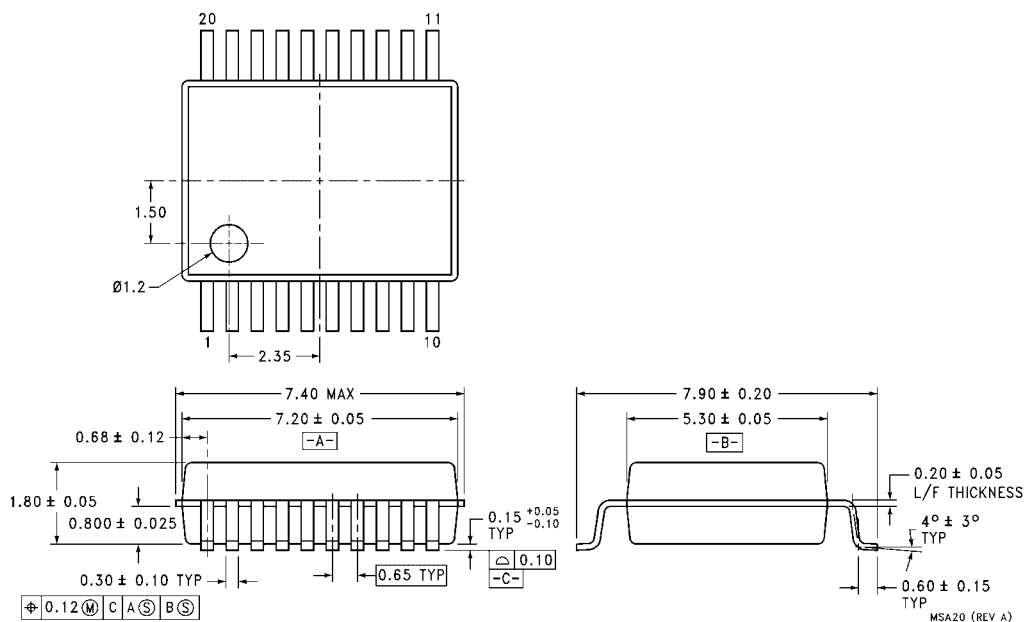

**20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide  
Package Number MSA20**

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

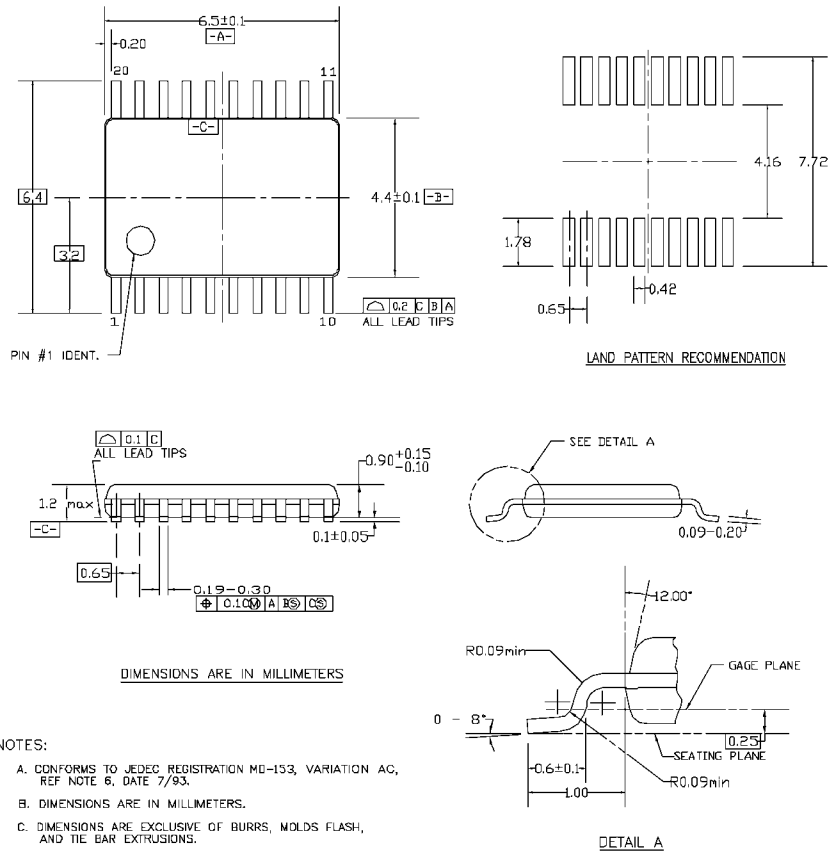

MTC20REV D1

### 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC20

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)