

DATA SHEET

GBPC3500~GBPC3510

GLASS PASSIVATED BRIDGE RECTIFIER

VOLTAGE 50 to 1000 Volts **CURRENT** 35 Amperes

GBPC Unit: mm



Recongnized File # E111753

FEATURES

- Plastic material has Underwriters Laboratory Flammability Classification 94V-O
- The plastic package has Underwriters Laboratory Flammability Classification 94V-O.
- Both normal and Pb free product are available :
Normal : 80~95% Sn, 5~20% Pb
Pb free: 98.5% Sn above


MECHANICALDATA

Case:Molded plastic with heatsink integrally mounthed in the bringe encapsulation.

Mounting position: Any

Weight: 1 ounce, 30 grams

Therminals: Plated . 25" FASTON

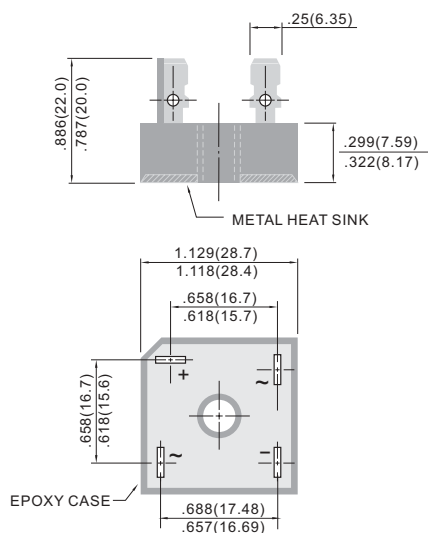

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.
For Capacitive load derate current by 20%.

PARAMETER	SYMBOL	GBPC 35005	GBPC 3501	GBPC 3502	GBPC 3504	GBPC 3506	GBPC 3508	GBPC 3510	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current For Resistive Load at $T_C=55^{\circ}C$	I_{AV}	35							A
Non-repetitive Peak Forward Surge Current at Rated Load	I_{FSM}	400							A
Maximum Forward Voltage per Bridge Element at 1.5A Specified Current	V_F	1.2							V
Maximum Reverse Leakage Current at Rated @ $T_A=25^{\circ}C$ DC Blocking Voltage @ $T_A=100^{\circ}C$	I_R	10.0 1000							μA
If Rating for fusing ($t \leq 8.35ms$)	I_t	660							A ² t
Typical Thermal Resistance per leg	$R_{\theta JC}$	3.0							$^{\circ}C/W$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150							$^{\circ}C$

RATING AND CHARACTERISTIC CURVES

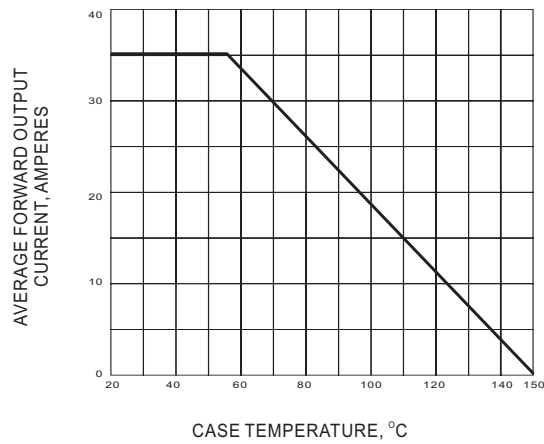


Fig.1 DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

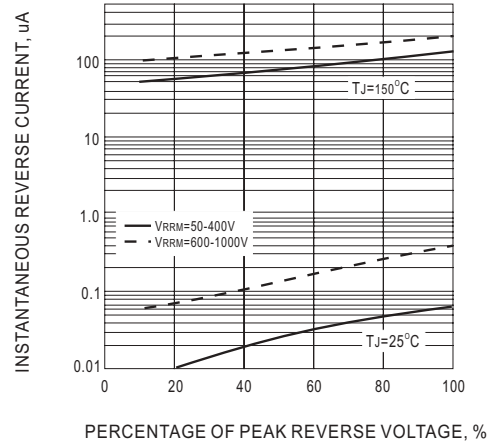


Fig.2 TYPICAL REVERSE CHARACTERISTICS

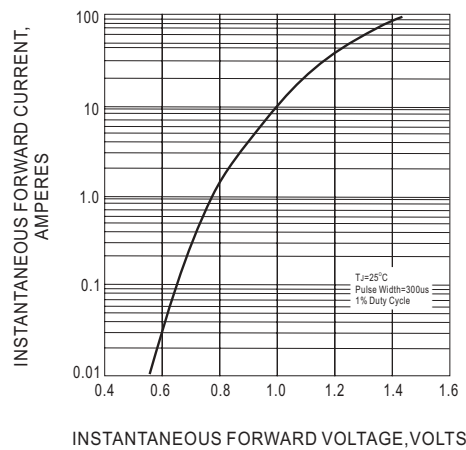


Fig.3 TYPICAL FORWARD CHARACTERISTIC