
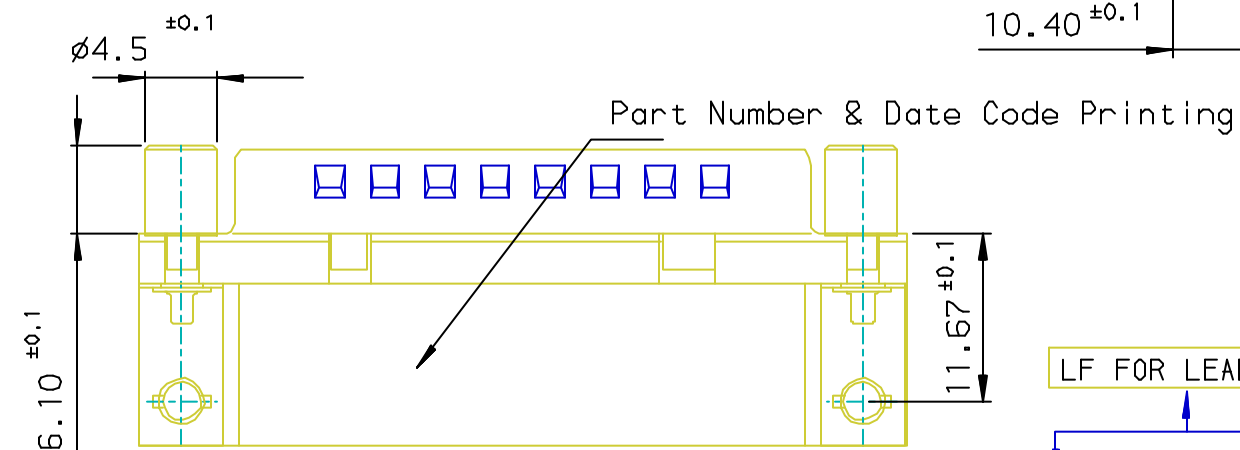


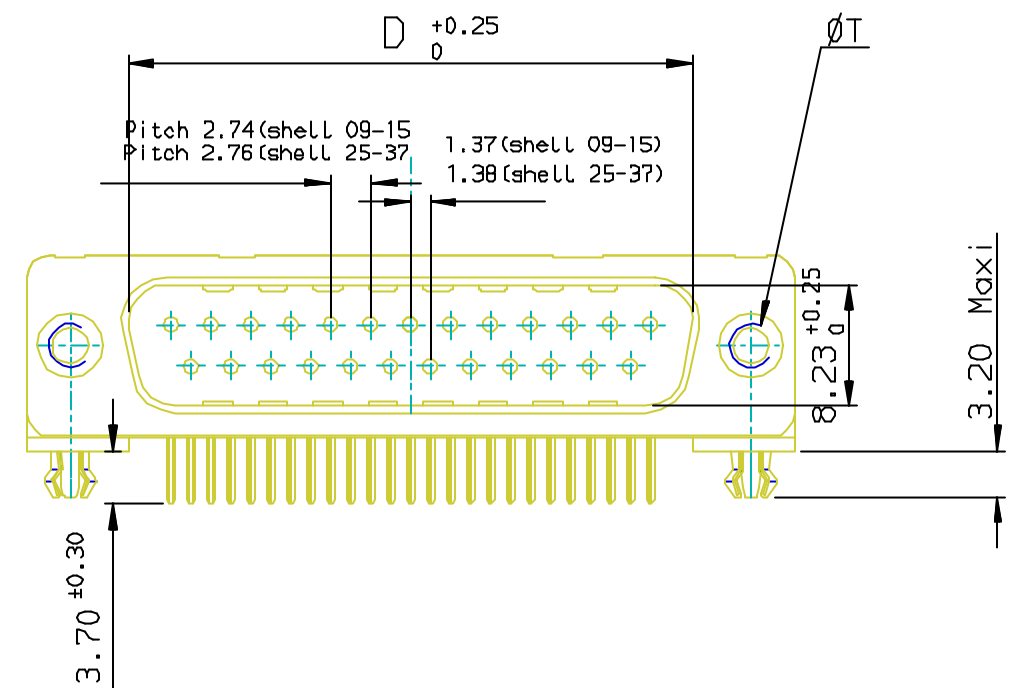

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	G±0.25	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	5.90	D09P13B4G*00**	D09P13B6G*00**
15	39.14	33.32	25.18	25.12	19.18	5.90	D15P13B6G*00**	D15P13B6G*00**
25	53.03	47.04	39.12	38.84	33.12	5.70	D25P13B4G*00**	D25P13B6G*00**
37	69.32	63.50	55.68	55.30	49.68	5.70	D37P13B4G*00**	D37P13B6G*00**
EQUIPEMENTS							Gold flash	0,76 μ gold

REQUIREMENTS

Technical characteristics:

```

Shell:steel tin/Zinc Cr3 plated
Insulators:self-extinguishing thermoplastic,ULclass94V0
Contacts:brass,gold (for thickness see table) over 2µ mini nickel
on active area and flash to 1.5µ maxi SnPb over 1µ mini nickel on termination
Cycles:200 for plating 4
        .500 for plating 6

```

Accessories:

Harpoon: phosphor bronze,tin plated
Metal plate for electrical continuity:brass ,tin/Zinc Cr3 plated
Screwlock: brass,tin/Zinc Cr3 plated

Electrical characteristics

max.current rating: 5A
Test voltage: 1000V
Rated voltage: 300V
Contact resistance: $\leq 25\text{m}\Omega$
Shell resistance: $\leq 5\text{m}\Omega$
Insulation resistance: $\geq 5000\text{M}\Omega$

Climatic characteristics:


Operating temperature range:-55°C +125°C

Dimensions:

in accordance with MIL-C-24308B and DIN41652

LF FOR LEAD FREE

Threaded ØT M3 = I
Threaded ØT 4.40 = V

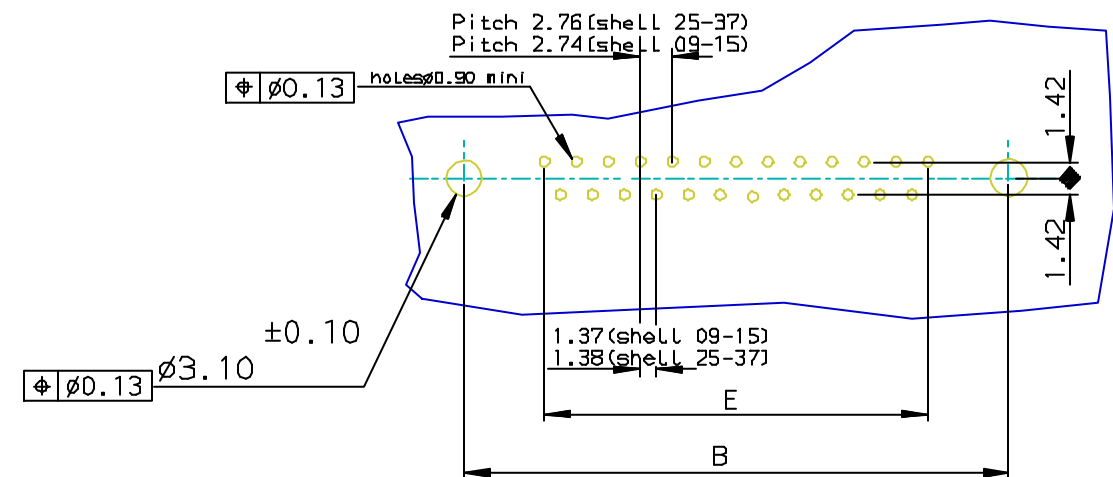

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

FOR ROHS DETAILS REFER DWG.NO:C01-8646-0000

European Views

rev	ecn no	dr	date
C	105-0124	JS	2005/07/27
D	106-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface 150 1302 ✓		tolerance std 150 405 150 1101		projection 		mm 		
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	JOHN SLEEBA	1994/08/02	ANGULAR		LINEAR	0.X	±0.1	size A3	Scale 1:1		
Eng	GEORGE VJ	1994/08/02				0.XX	±0.1				
Chr	GEORGE VJ	2005/07/27	0.XX* ±2°	0.XXX		±0.1	ECN		-		
Appr	KVSD	2005/07/27	Product family				D-SUB		Spec ref -		
			title MALE CONNECT.DELTA D RIGHT ANGLED SCREWLOCK, HARPOON & METAL PLATE				dwg no C01-8646-0279			Rev. D	
catalog no			DELTA-D				CUSTOMER		sheet 1 of 1		