

1

2

3

4

A

B

C





D

A

B

C

D

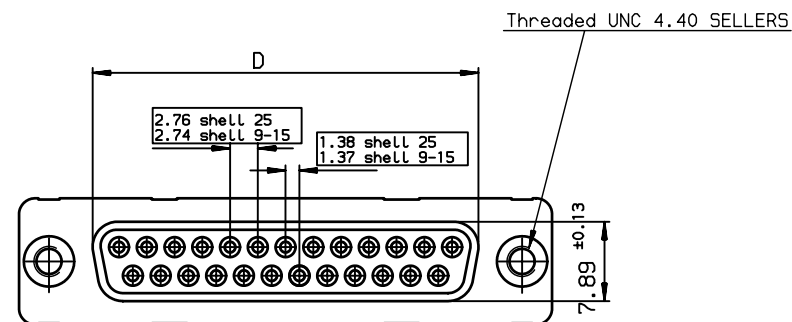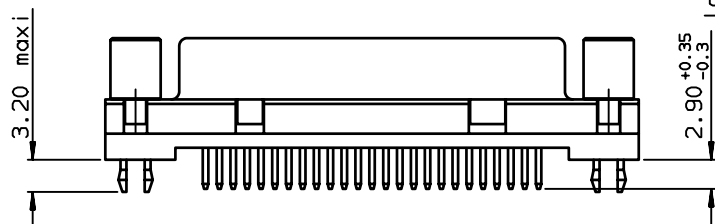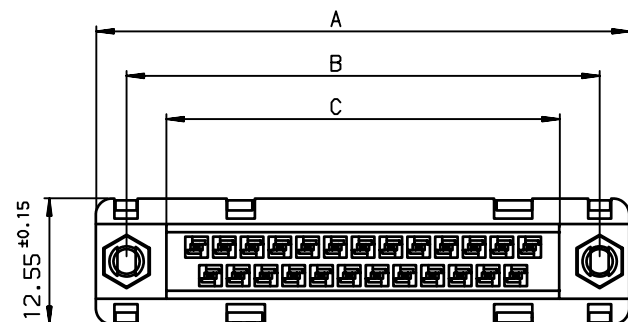


SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	E ± 0.07
09	30.81	24.99	16.96	16.21	10.96
15	39.14	33.32	25.18	24.54	19.18
25	53.03	47.04	39.12	38.25	33.12

Core range


SHELL	TIN LEAD P/N	LEAD FREE P/N	DESIGNATIONS
09	D09S24A4GV00	D09S24A4GV00LF	RECEPTACLE 9 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3
15	D15S24A4GV00	D15S24A4GV00LF	RECEPTACLE 15 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3
25	D25S24A4GV00	D25S24A4GV00LF	RECEPTACLE 25 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

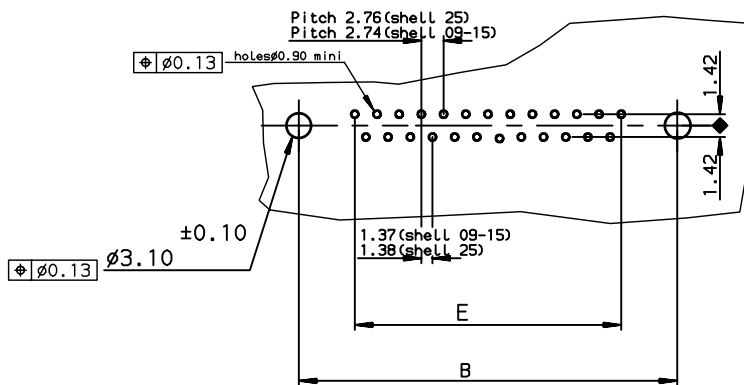

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS: SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	JOUBERT	2000/12/21	ANGULAR	LINEAR	0.X	± 0.1	size A3	Scale 2		
Eng	PESSON	2000/12/21			0.XX	± 0.1				
Chr	LEGARE	2000/12/21			0.XX' ± 2'	0.XXX			± 0.1	
Appr	LEGARE	2000/12/21	Product family				D-SUB	Spec ref -		
			RECEPTACLE STD EUROPE				dwg no C01-8646-0752		Rev. G	
			STRAIGHT SOLDER TYPE FOR PCB 1.60mm							
catalog no			-				CUSTOMER		sheet 1 of 1	