

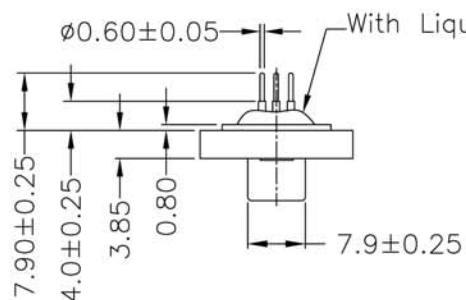


15 Pin Female Connector
PCB Pin Layout
Scale 2:1







With Liquid Glue



Screw L=5.0 For Panel Thickness
Under 1.2mm

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm

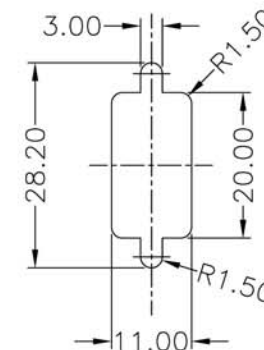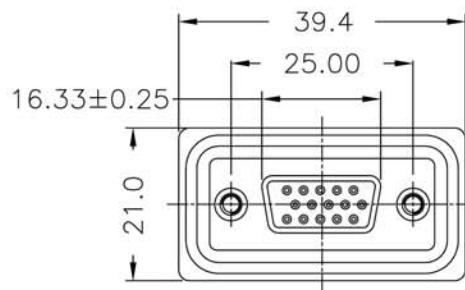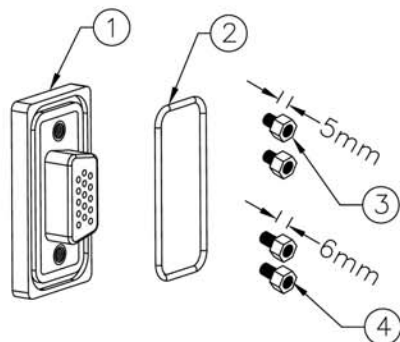

Recommended Panel Cut-Out

Note:

- * Waterproof Rate: IP67
- * Connector: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated

RoHS
Compliant

ITEM NO
A-HDF15PP-WP

TITLE
D-SUB, High Density, Female, 15 pin, 180°

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 – Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved