


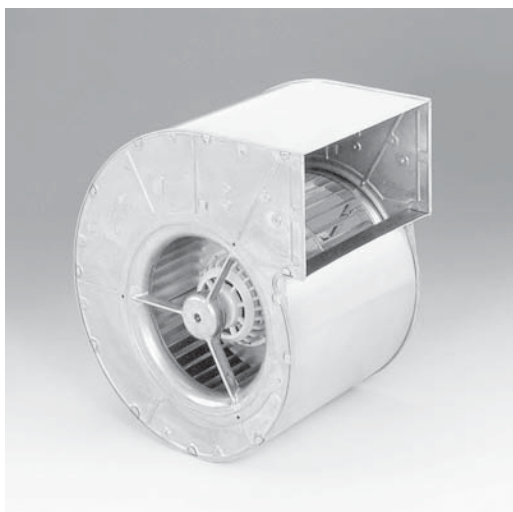

RD25S Series

Centrifugal Blower

Ø 250mm

■ AC dual inlet, forward curved centrifugal blower in compact housing. The integrated external-rotor motor is mounted inside the housing.


■ Housing and impeller made of galvanized sheet-steel. Forward curved impellers are directly press-fitted onto the rotor of the external-rotor motor.

■ Direction of rotation is CCW as seen from inlet side. Insulation class "F".

■ Maintenance-free ball bearings.

■ UL, CSA, VDE approvals on some models, please contact application engineering.

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
RD25S-4/209061	1	2000	115	50/60	1150	n/a	40	Ball	Leads	60	40.0
RD25S-4/209718	3	2800	230	50/60	1800	n/a	40	Ball	Leads	20	44.0
RD25S-4/210311	1	2000	230	50/60	1100	n/a	40	Ball	Leads	14	40.0
RD25S-4/206198	3	2800	115	60	1800	n/a	40	Ball	Leads	90	44.0

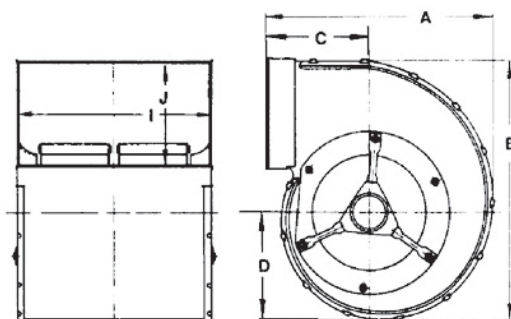

DIMENSIONS - Inches (mm)		A	B	C	D	I	J
PART NUMBER		A	B	C	D	I	J
RD25S-4/209061		15.90	17.64	7.05	7.52	11.50	6.61
RD25S-4/210311		(404)	(448)	(179)	(191)	(292)	(168)
RD25S-4/206198		15.90	17.64	7.05	7.52	14.88	6.61
RD25S-4/209718		(404)	(448)	(179)	(191)	(378)	(168)

