


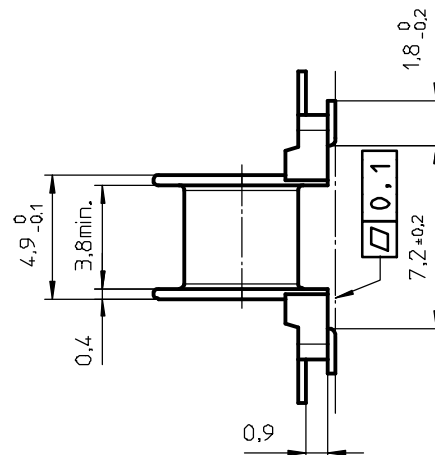


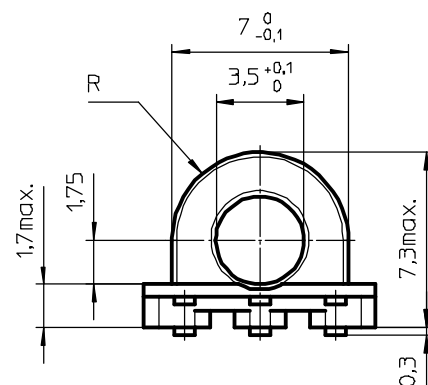

PROPOSED PAD ARRANGEMENT:

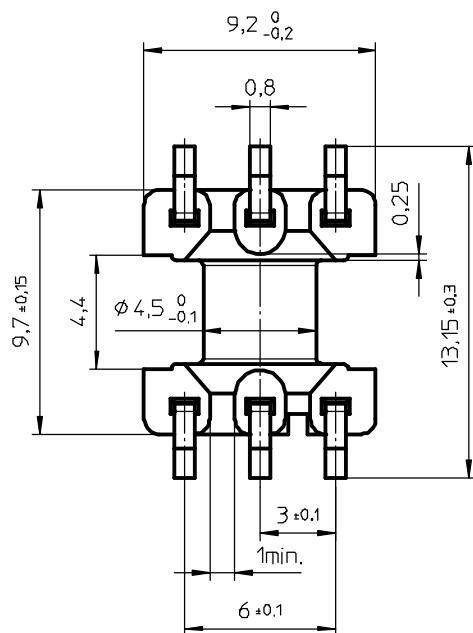

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
 Min. winding area: 4,56 mm².
 Mean length of turn: 17,9 mm.

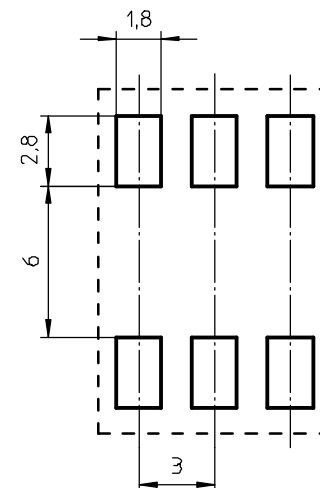

CLASS NO.		CSHS-EP7-1S-6P-Z		1 03-06-03	
NAME		M. Veekens		4322 021 06341	
M.P.A.		CHECK CONTR.		A3	
DATE		2003-06-03		112 - 001 069	
PROPERTY OF		Eigendom van		© FERROXCUBE 2000	