


SCHOTTKY BARRIER DIODE

■ Outline drawings, mm

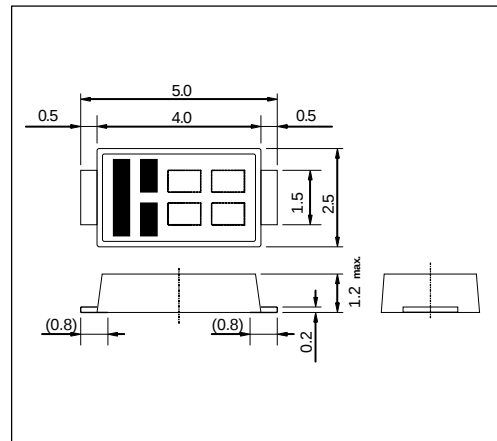


■ Features

- Surface-mount device
- Low V_F
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed switching

■ Marking

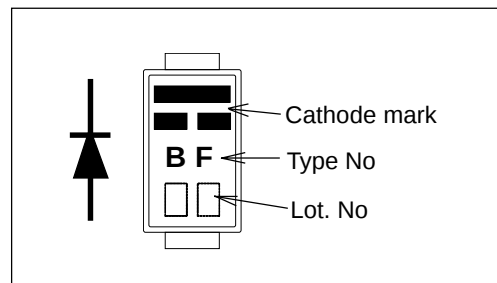

■ Maximum ratings and characteristics

- Absolute maximum ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		40	V
Average output current	I_o	Square wave duty=1/2 $T_l=120^\circ\text{C}$	2.0	A
Surge current	I_{FSM}	Sine wave 10ms, 1shot	70	A
Operating junction temperature	T_j		150	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

- Electrical characteristics (at $T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=2.0\text{A}$	0.51	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	1.0	mA
Thermal resistance	$R_{th(j-l)}$	Junction to lead	18	$^\circ\text{C/W}$

- Mechanical characteristics


Approximate mass	0.035	g
------------------	-------	---

(40V / 2.0A)


SD832-04 (2.0A)

Characteristics


Forward Characteristic(typ.)

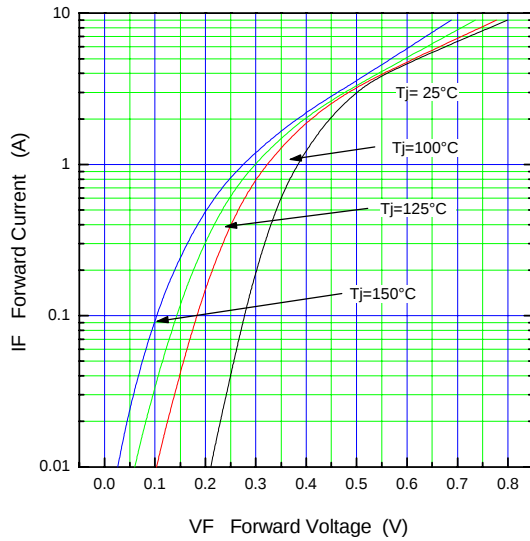


Reverse Characteristic (typ.)

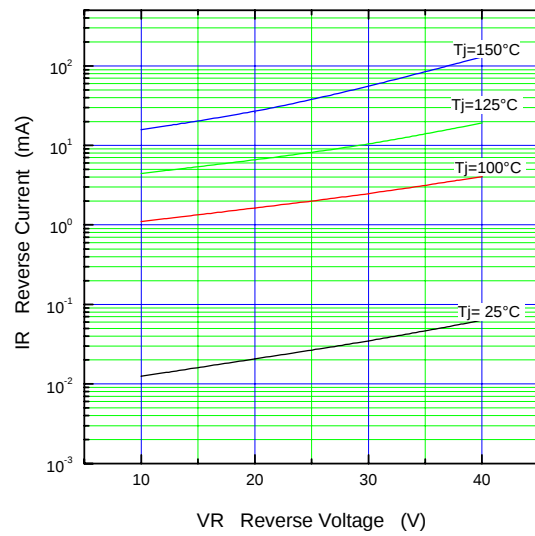


Forward Power Dissipation (max.)

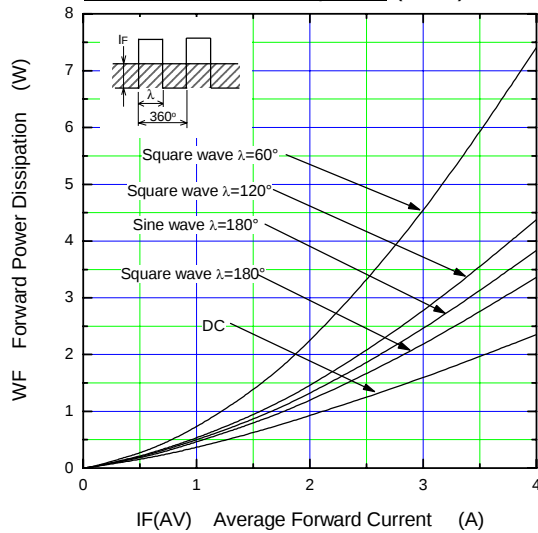

Reverse Power Dissipation(max.)

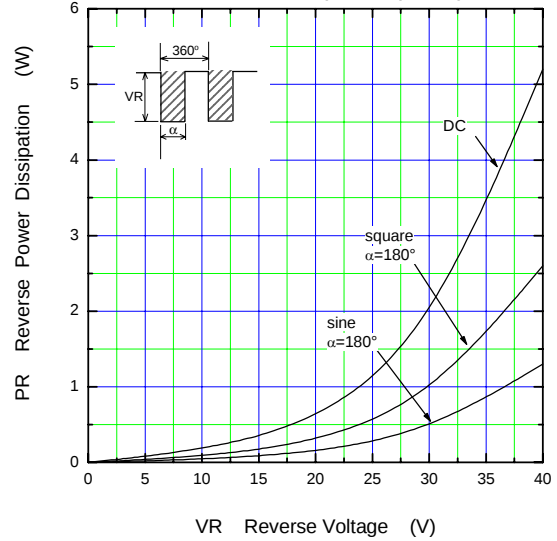

Current Derating (IF(AV)-TI) (max.)

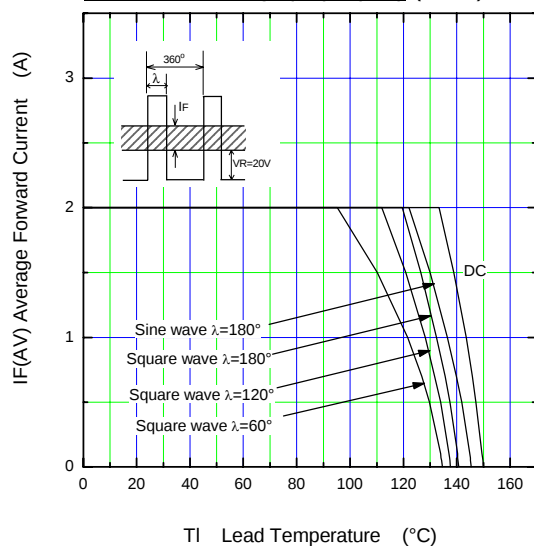

Junction Capacitance Characteristic (typ.)

