



**Advanced Power  
Electronics Corp.**


**AP15T03GH/J**

**Pb Free Plating Product**

*N-CHANNEL ENHANCEMENT MODE*

*POWER MOSFET*


- ▼ Lower Gate Charge
- ▼ Simple Drive Requirement
- ▼ Fast Switching Characteristic




|              |              |
|--------------|--------------|
| $BV_{DSS}$   | 30V          |
| $R_{DS(ON)}$ | 80m $\Omega$ |
| $I_D$        | 12A          |

## Description

The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters. The through-hole version (AP15T03GJ) is available for low-profile applications.



TO-252(H)



TO-251(J)

## Absolute Maximum Ratings

| Symbol                 | Parameter                            | Rating     | Units          |
|------------------------|--------------------------------------|------------|----------------|
| $V_{DS}$               | Drain-Source Voltage                 | 30         | V              |
| $V_{GS}$               | Gate-Source Voltage                  | $\pm 20$   | V              |
| $I_D@T_C=25^{\circ}C$  | Continuous Drain Current             | 12         | A              |
| $I_D@T_C=100^{\circ}C$ | Continuous Drain Current             | 6.4        | A              |
| $I_{DM}$               | Pulsed Drain Current <sup>1</sup>    | 50         | A              |
| $P_D@T_C=25^{\circ}C$  | Total Power Dissipation              | 12.5       | W              |
|                        | Linear Derating Factor               | 0.1        | W/ $^{\circ}C$ |
| $T_{STG}$              | Storage Temperature Range            | -55 to 150 | $^{\circ}C$    |
| $T_J$                  | Operating Junction Temperature Range | -55 to 150 | $^{\circ}C$    |

## Thermal Data

| Symbol | Parameter                                | Value | Units         |
|--------|------------------------------------------|-------|---------------|
| Rthj-c | Thermal Resistance Junction-case Max.    | 10    | $^{\circ}C/W$ |
| Rthj-a | Thermal Resistance Junction-ambient Max. | 110   | $^{\circ}C/W$ |



## AP15T03GH/J

### Electrical Characteristics@T<sub>j</sub>=25°C(unless otherwise specified)

| Symbol                              | Parameter                                            | Test Conditions                                          | Min. | Typ. | Max. | Units |
|-------------------------------------|------------------------------------------------------|----------------------------------------------------------|------|------|------|-------|
| BV <sub>DSS</sub>                   | Drain-Source Breakdown Voltage                       | V <sub>GS</sub> =0V, I <sub>D</sub> =250uA               | 30   | -    | -    | V     |
| ΔBV <sub>DSS</sub> /ΔT <sub>j</sub> | Breakdown Voltage Temperature Coefficient            | Reference to 25°C, I <sub>D</sub> =1mA                   | -    | 0.02 | -    | V/°C  |
| R <sub>DS(ON)</sub>                 | Static Drain-Source On-Resistance <sup>2</sup>       | V <sub>GS</sub> =10V, I <sub>D</sub> =8A                 | -    | -    | 80   | mΩ    |
|                                     |                                                      | V <sub>GS</sub> =4.5V, I <sub>D</sub> =5A                | -    | -    | 100  | mΩ    |
| V <sub>GS(th)</sub>                 | Gate Threshold Voltage                               | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250uA | 1    | -    | 3    | V     |
| g <sub>fs</sub>                     | Forward Transconductance                             | V <sub>DS</sub> =10V, I <sub>D</sub> =8A                 | -    | 7    | -    | S     |
| I <sub>DSS</sub>                    | Drain-Source Leakage Current (T <sub>j</sub> =25°C)  | V <sub>DS</sub> =30V, V <sub>GS</sub> =0V                | -    | -    | 1    | uA    |
|                                     | Drain-Source Leakage Current (T <sub>j</sub> =150°C) | V <sub>DS</sub> =24V, V <sub>GS</sub> =0V                | -    | -    | 25   | uA    |
| I <sub>GSS</sub>                    | Gate-Source Leakage                                  | V <sub>GS</sub> =±20V                                    | -    | -    | ±100 | nA    |
| Q <sub>g</sub>                      | Total Gate Charge <sup>2</sup>                       | I <sub>D</sub> =8A                                       | -    | 4    | 7    | nC    |
| Q <sub>gs</sub>                     | Gate-Source Charge                                   | V <sub>DS</sub> =24V                                     | -    | 1.4  | -    | nC    |
| Q <sub>gd</sub>                     | Gate-Drain ("Miller") Charge                         | V <sub>GS</sub> =4.5V                                    | -    | 2.4  | -    | nC    |
| t <sub>d(on)</sub>                  | Turn-on Delay Time <sup>2</sup>                      | V <sub>DS</sub> =15V                                     | -    | 6    | -    | ns    |
| t <sub>r</sub>                      | Rise Time                                            | I <sub>D</sub> =8A                                       | -    | 22   | -    | ns    |
| t <sub>d(off)</sub>                 | Turn-off Delay Time                                  | R <sub>G</sub> =3.3Ω, V <sub>GS</sub> =10V               | -    | 11   | -    | ns    |
| t <sub>f</sub>                      | Fall Time                                            | R <sub>D</sub> =1.88Ω                                    | -    | 2.4  | -    | ns    |
| C <sub>iss</sub>                    | Input Capacitance                                    | V <sub>GS</sub> =0V                                      | -    | 280  | 450  | pF    |
| C <sub>oss</sub>                    | Output Capacitance                                   | V <sub>DS</sub> =25V                                     | -    | 70   | -    | pF    |
| C <sub>rss</sub>                    | Reverse Transfer Capacitance                         | f=1.0MHz                                                 | -    | 47   | -    | pF    |
| R <sub>g</sub>                      | Gate Resistance                                      | f=1.0MHz                                                 | -    | 1.1  | -    | Ω     |

### Source-Drain Diode

| Symbol          | Parameter                          | Test Conditions                          | Min. | Typ. | Max. | Units |
|-----------------|------------------------------------|------------------------------------------|------|------|------|-------|
| V <sub>SD</sub> | Forward On Voltage <sup>2</sup>    | I <sub>S</sub> =8A, V <sub>GS</sub> =0V  | -    | -    | 1.3  | V     |
| t <sub>rr</sub> | Reverse Recovery Time <sup>2</sup> | I <sub>S</sub> =8A, V <sub>GS</sub> =0V, | -    | 17   | -    | ns    |
| Q <sub>rr</sub> | Reverse Recovery Charge            | dI/dt=100A/μs                            | -    | 7    | -    | nC    |

#### Notes:

1.Pulse width limited by safe operating area.

2.Pulse width ≤300us , duty cycle ≤2%.

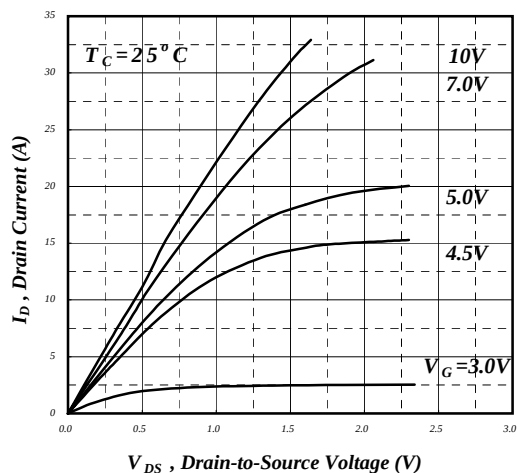


Fig 1. Typical Output Characteristics

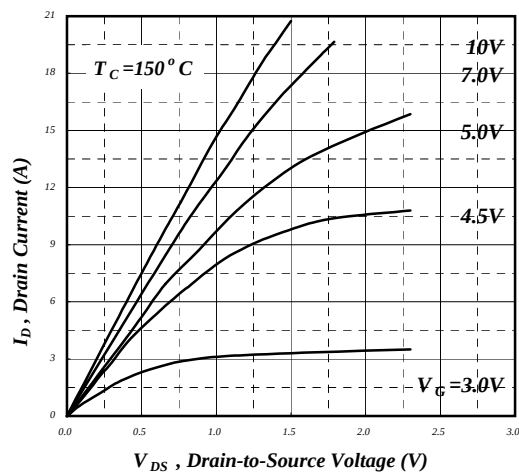


Fig 2. Typical Output Characteristics

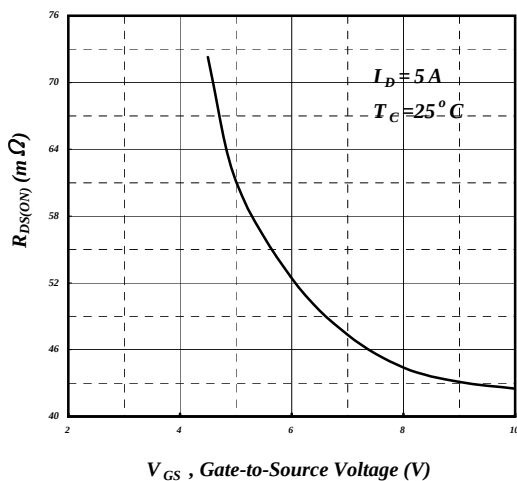


Fig 3. On-Resistance v.s. Gate Voltage

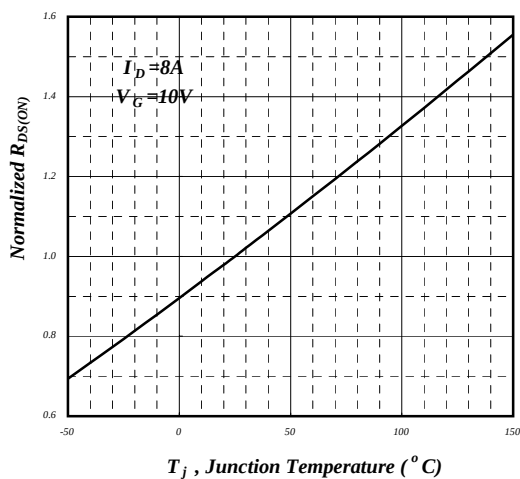


Fig 4. Normalized On-Resistance  
v.s. Junction Temperature

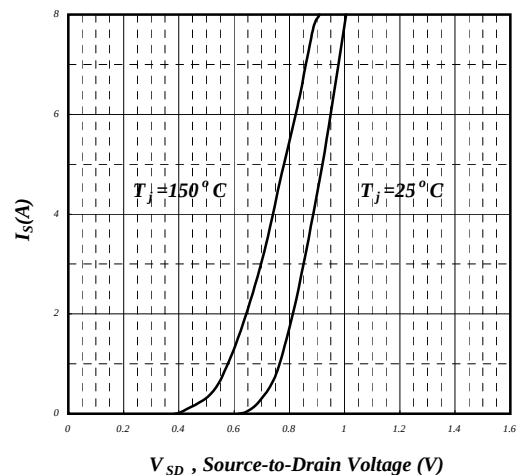


Fig 5. Forward Characteristic of  
Reverse Diode

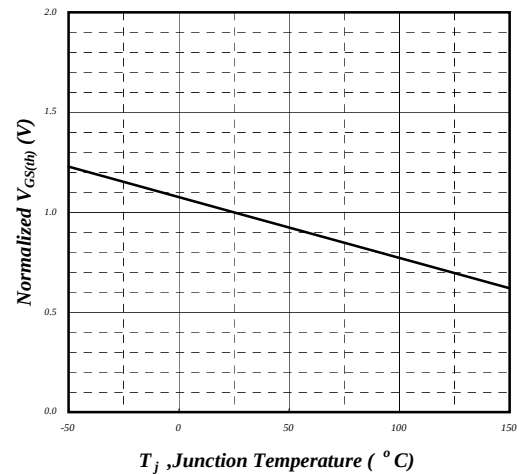


Fig 6. Gate Threshold Voltage v.s.  
Junction Temperature

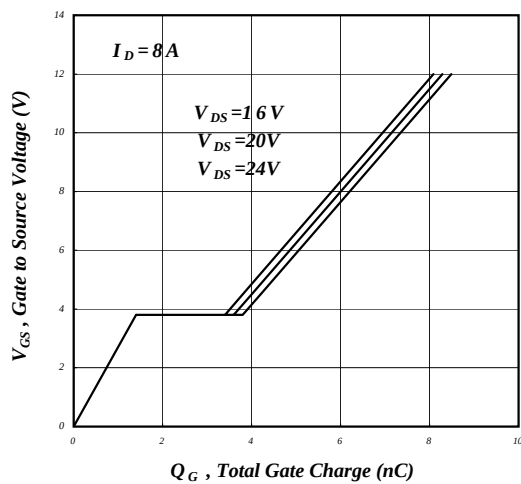


Fig 7. Gate Charge Characteristics

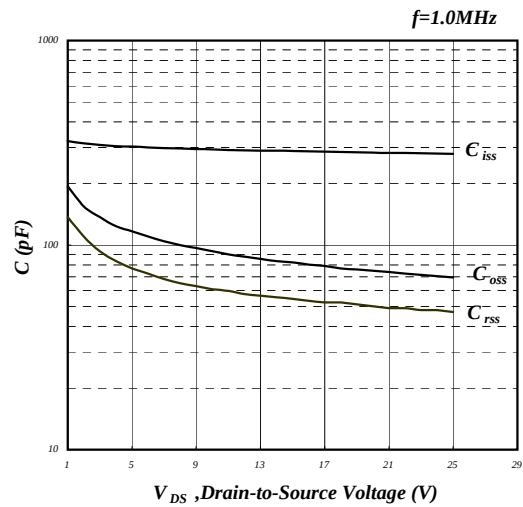


Fig 8. Typical Capacitance Characteristics

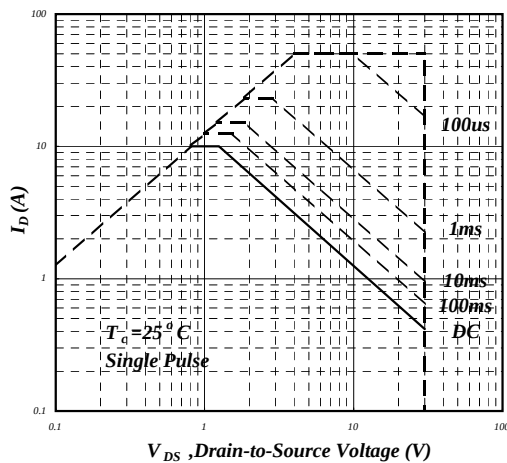


Fig 9. Maximum Safe Operating Area

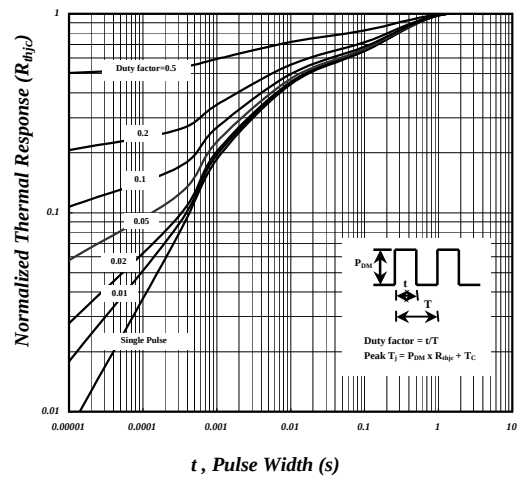


Fig 10. Effective Transient Thermal Impedance

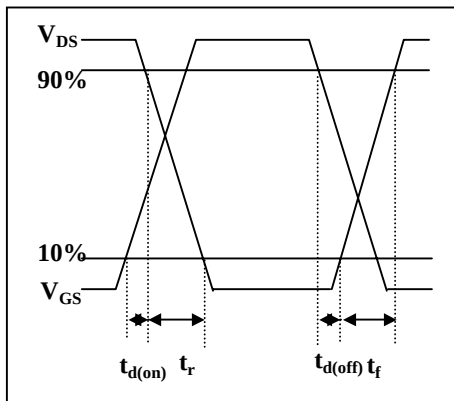


Fig 11. Switching Time Waveform

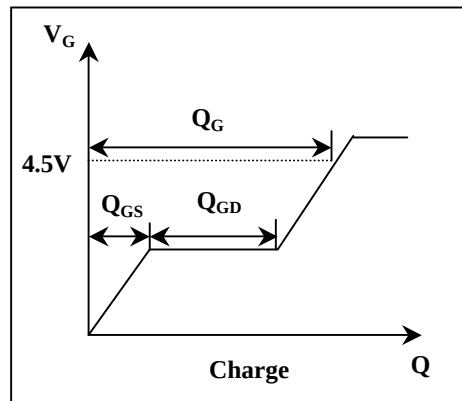


Fig 12. Gate Charge Waveform