





Dual Enhancement Mode Field Effect Transistor (N and P Channel)

PRODUCT SUMMARY (N-Channel)

V _{DSS}	I _D	R _{DS(ON)} (m Ω) Max
30V	6.2A	32 @ V _{GS} = 10V
		57 @ V _{GS} = 4.5V

PRODUCT SUMMARY (P-Channel)

V _{DSS}	I _D	R _{DS(ON)} (m Ω) Max
-30V	-5A	45 @ V _{GS} = -10V
		60 @ V _{GS} = -4.5V



ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Parameter	Symbol	N-Channel	P-Channel	Unit
Drain-Source Voltage	V _{DS}	30	-30	V
Gate-Source Voltage	V _{GS}	±20	±20	V
Drain Current-Continuous ^a @ T _J =125°C -Pulsed ^b	I _D	6.2	- 5	A
	I _{DM}	25	- 20	A
Drain-Source Diode Forward Current ^a	I _S	1.7	-1.7	A
Maximum Power Dissipation ^a	P _D	2.0		W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to 150		°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Ambient ^a	R θ JA	62.5	°C/W
--	---------------	------	------

STM8402

N-Channel ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D = 250uA	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24V, V _{GS} = 0V			1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
ON CHARACTERISTICS ^b						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250uA	1	1.7	2.5	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 9A		27	32	m ohm
		V _{GS} = 4.5V, I _D = 7A		52	57	m ohm
On-State Drain Current	I _{D(ON)}	V _{DS} = 10V, V _{GS} = 10V	18			A
Forward Transconductance	g _{FS}	V _{DS} = 10V, I _D = 5A		8		S
DYNAMIC CHARACTERISTICS ^c						
Input Capacitance	C _{ISS}	V _{DS} = 15V, V _{GS} = 0V f = 1.0MHz		521		pF
Output Capacitance	C _{OSS}			83		pF
Reverse Transfer Capacitance	C _{RSS}			61		pF
SWITCHING CHARACTERISTICS ^c						
Turn-On Delay Time	t _{D(ON)}	V _{DD} = 15V, I _D = 1A, V _{GS} = 10V, R _{GEN} = 6		12.7		ns
Rise Time	t _r			6.5		ns
Turn-Off Delay Time	t _{D(OFF)}			16.8		ns
Fall Time	t _f			9.6		ns
Total Gate Charge	Q _g	V _{DS} = 15V, I _D = 9A, V _{GS} = 10V		13.6		nC
		V _{DS} = 15V, I _D = 9A, V _{GS} = 4.5V		9.6		nC
Gate-Source Charge	Q _{gs}	V _{DS} = 15V, I _D = 9A, V _{GS} = 10V		2.7		nC
Gate-Drain Charge	Q _{gd}			2.9		nC

STM8402

P-Channel ELECTRICAL CHARACTERISTICS (TA=25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D = -250uA	-30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -24V, V _{GS} = 0V			-1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
ON CHARACTERISTICS ^b						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250uA	-1	-1.5	-2.5	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} = -10V, I _D = -4.5A		35	45	m ohm
		V _{GS} = -4.5V, I _D = -3.6A		50	60	m ohm
On-State Drain Current	I _{D(ON)}	V _{DS} = -5V, V _{GS} = -10V	-15			A
Forward Transconductance	g _{FS}	V _{DS} = -5V, I _D = - 5A		5		S
DYNAMIC CHARACTERISTICS ^c						
Input Capacitance	C _{ISS}	V _{DS} = -15V, V _{GS} = 0V f = 1.0MHz		626		pF
Output Capacitance	C _{OSS}			166		pF
Reverse Transfer Capacitance	C _{RSS}			72		pF
SWITCHING CHARACTERISTICS ^c						
Turn-On Delay Time	t _{D(ON)}	V _D = -15V, R _L = 15 I _D = -1A, V _{GEN} = -10V, R _{GEN} = 6		11.8		ns
Rise Time	t _r			14.3		ns
Turn-Off Delay Time	t _{D(OFF)}			76.8		ns
Fall Time	t _f			37.2		ns
Total Gate Charge	Q _g	V _{DS} = -15V, I _D = -4.9A, V _{GS} = -10V		17.6		nC
		V _{DS} = -15V, I _D = -4.9A, V _{GS} = -4.5V		8.9		nC
Gate-Source Charge	Q _{gs}	V _{DS} = -15V, I _D = - 4.9A, V _{GS} = -10V		3.6		nC
Gate-Drain Charge	Q _{gd}			3.2		nC

STM8402

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
DRAIN-SOURCE DIODE CHARACTERISTICS ^b						
Diode Forward Voltage	V _{SD}	V _{GS} = 0V, I _S = 1.7A	N-Ch	0.82	1.2	V
		V _{GS} = 0V, I _S = -1.7A	P-Ch	-0.8	-1.2	

Notes

- a.Surface Mounted on FR4 Board, t≤10sec.
 - b.Pulse Test:Pulse Width≤300 μs, Duty Cycle≤2%.
 - c.Guaranteed by design, not subject to production testing.
- N-Channel

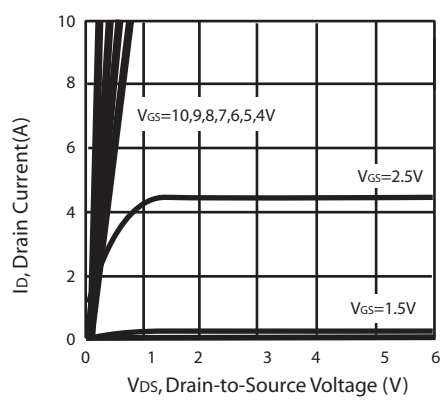


Figure 1. Output Characteristics

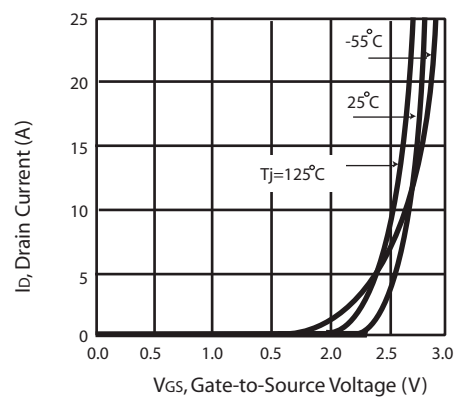


Figure 2. Transfer Characteristics

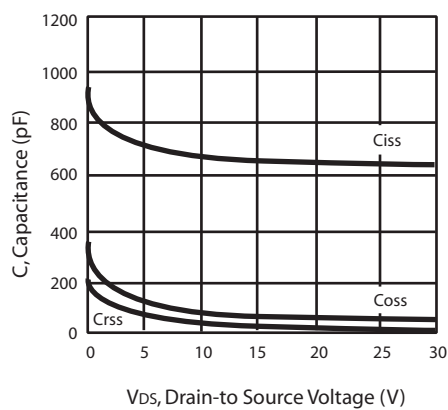


Figure 3. Capacitance

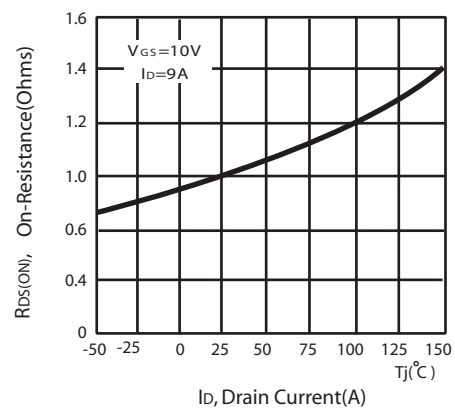


Figure 4. On-Resistance Variation with Drain Current and Temperature

STM8402

N-Channel

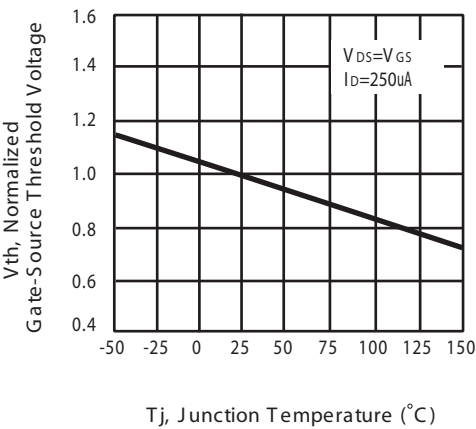


Figure 5. Gate Threshold Variation with Temperature

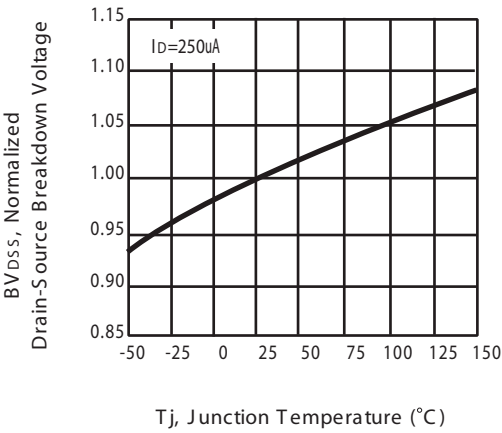


Figure 6. Breakdown Voltage Variation with Temperature

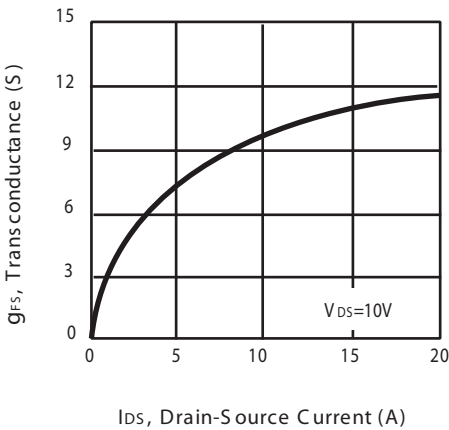


Figure 7. Transconductance Variation with Drain Current

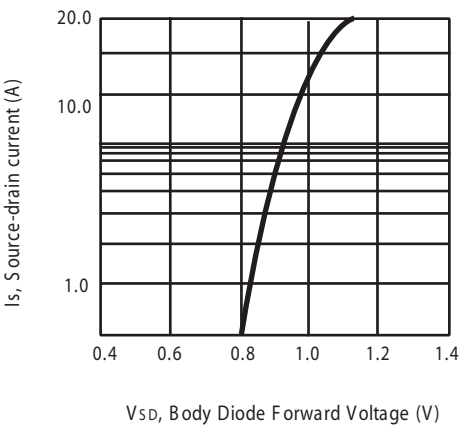


Figure 8. Body Diode Forward Voltage Variation with Source Current

STM8402

P-Channel

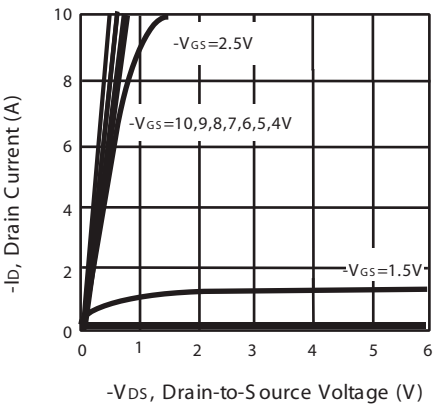


Figure 1. Output Characteristics

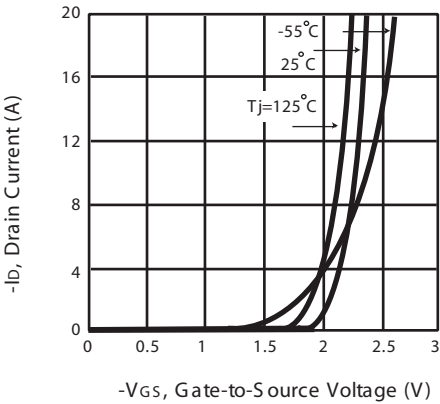


Figure 2. Transfer Characteristics

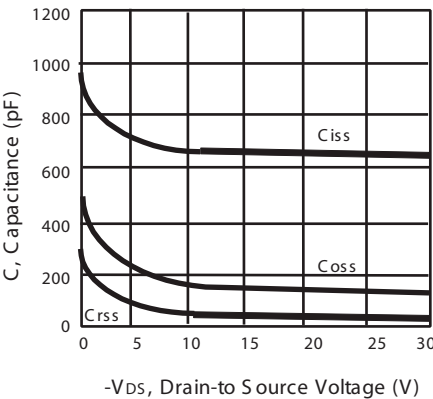


Figure 3. Capacitance

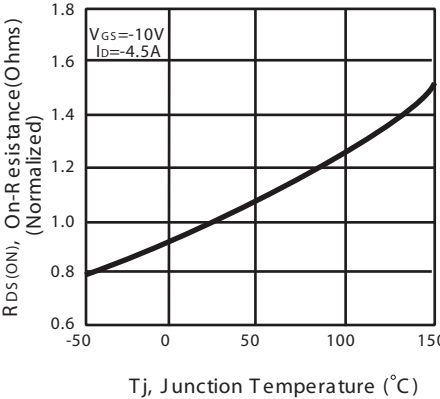


Figure 4. On-Resistance Variation with Temperature

STM8402

P-Channel

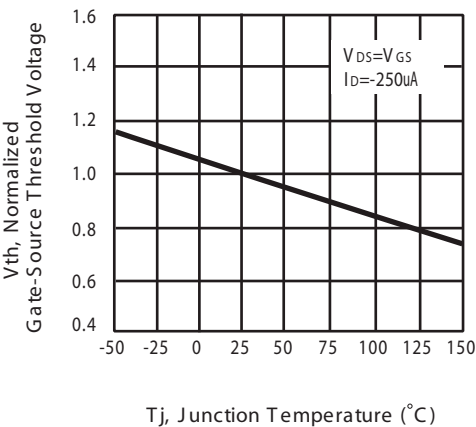


Figure 5. Gate Threshold Variation with Temperature

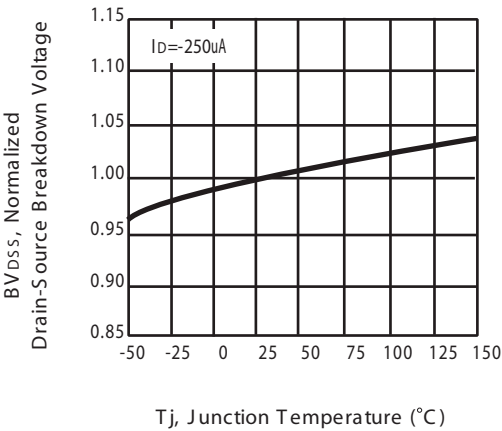


Figure 6. Breakdown Voltage Variation with Temperature

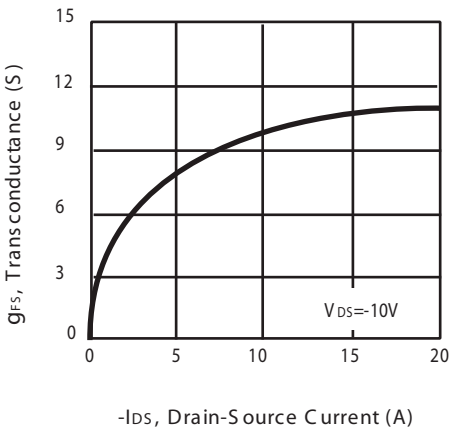


Figure 7. Transconductance Variation with Drain Current

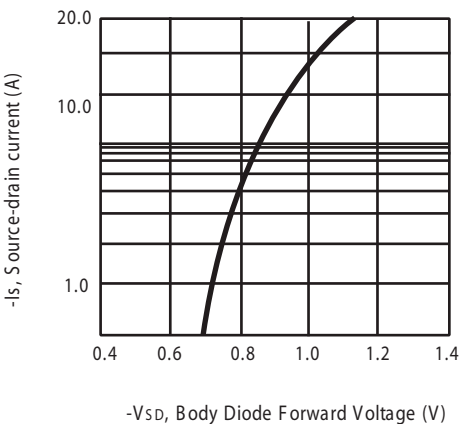


Figure 8. Body Diode Forward Voltage Variation with Source Current

STM8402

N-Channel

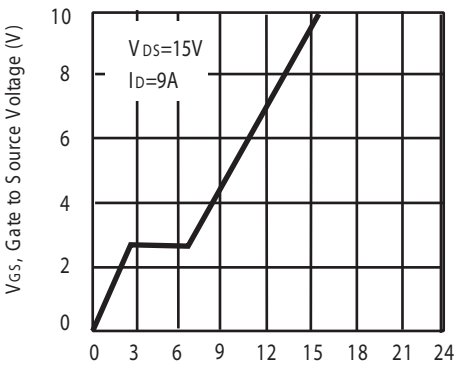


Figure 9. Gate Charge

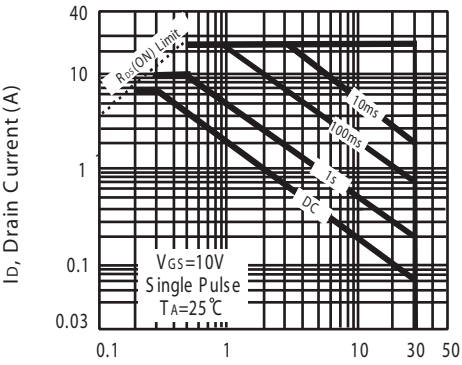


Figure 10. Maximum Safe Operating Area

P-Channel

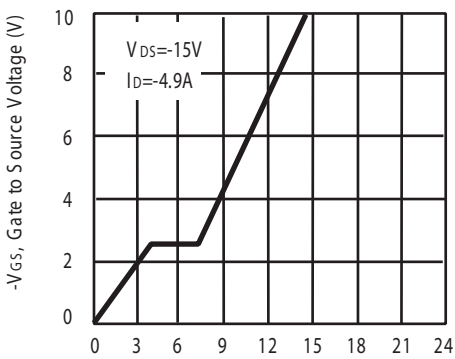


Figure 9. Gate Charge

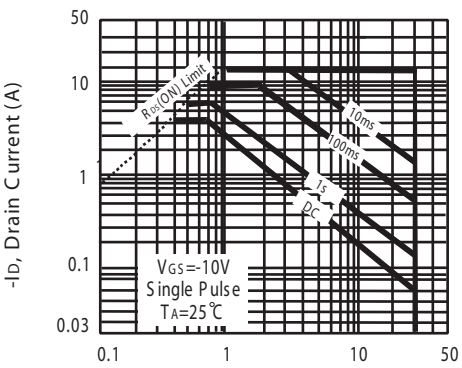


Figure 10. Maximum Safe Operating Area

STM8402

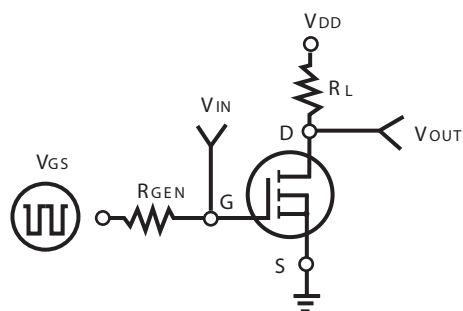


Figure 11. Switching Test Circuit

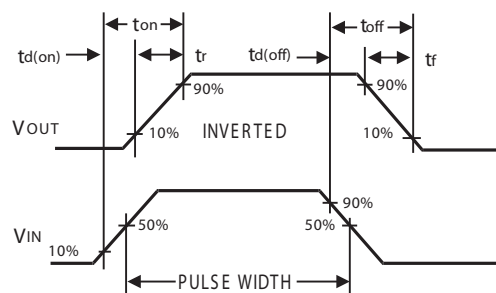


Figure 12. Switching Waveforms


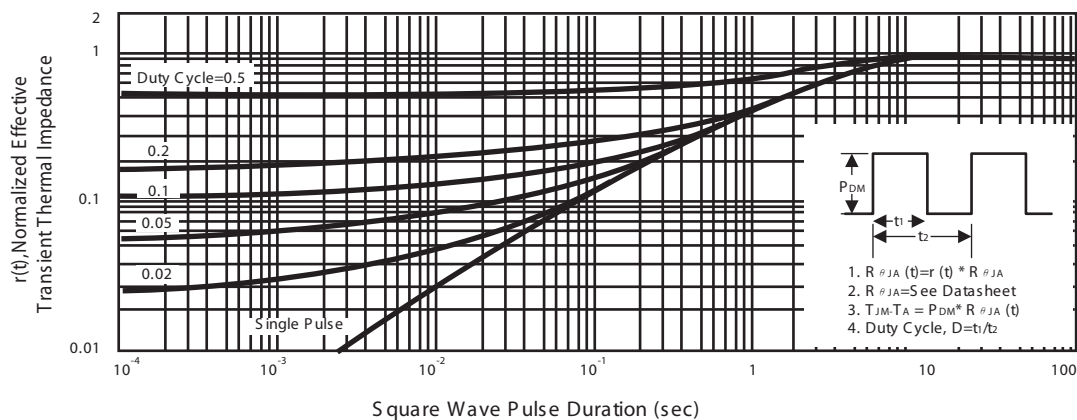


Figure 13. Normalized Thermal Transient Impedance Curve

STM8402

PACKAGE OUTLINE DIMENSIONS

SO-8

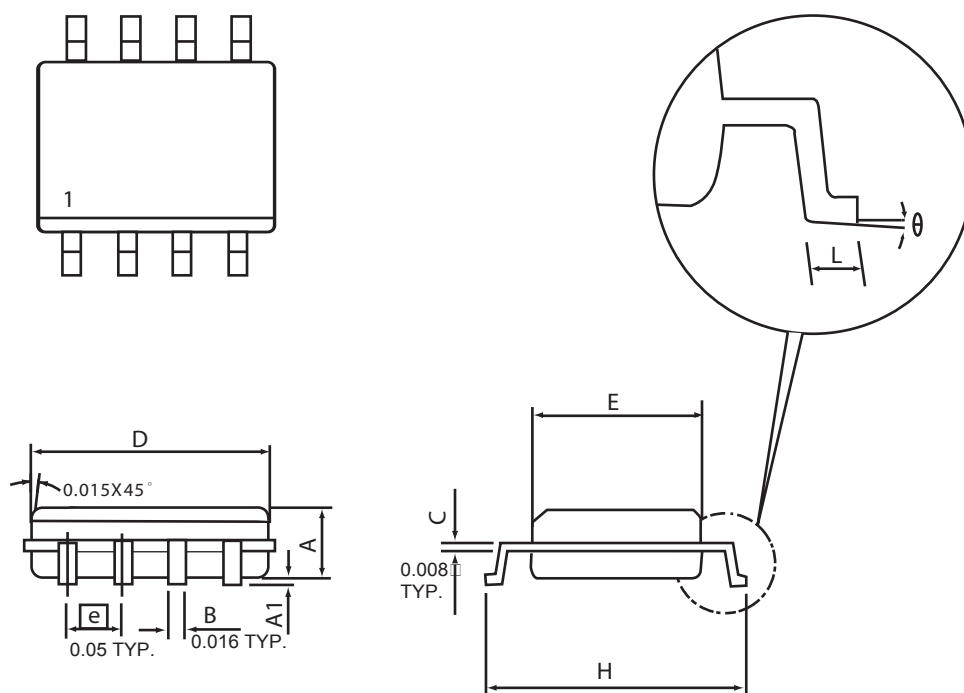


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
D	4.80	4.98	0.189	0.196
E	3.81	3.99	0.150	0.157
H	5.79	6.20	0.228	0.244
L	0.41	1.27	0.016	0.050
θ	0°	8°	0°	8°

STM8402

SO-8 Tape and Reel Data


SO-8 Carrier Tape

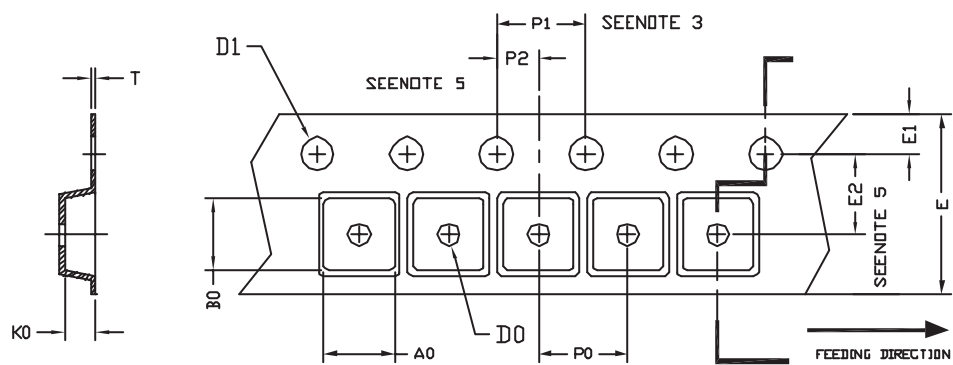

unit:mm

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
SOP 8N 150mil	6.40	5.20	2.10	$\phi 1.5$ (MIN)	$\phi 1.5 \square$ $+0.1 \square$ -0.0	12.0 ± 0.3	1.75	$5.5 \square$ ± 0.05	8.0	4.0	$2.0 \square$ ± 0.05	$0.3 \square$ ± 0.05

SO-8 Reel

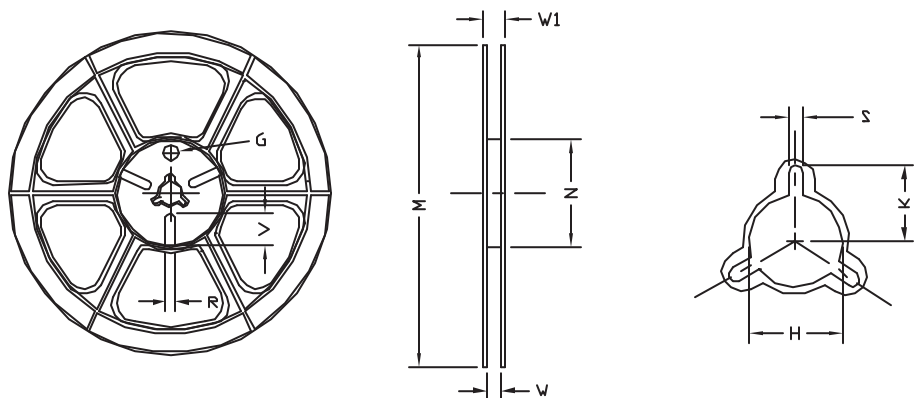

UNIT:mm

TAPE SIZE	REEL SIZE	M	N	W	W1	H	K	S	G	R	V
12 mm	$\phi 330$	330 ± 1	62 ± 1.5	$12.4 \square$ $+0.2$	$16.8 \square$ -0.4	$\phi 12.75$ $+0.15$	---	$2.0 \square$ ± 0.15	---	---	---