




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

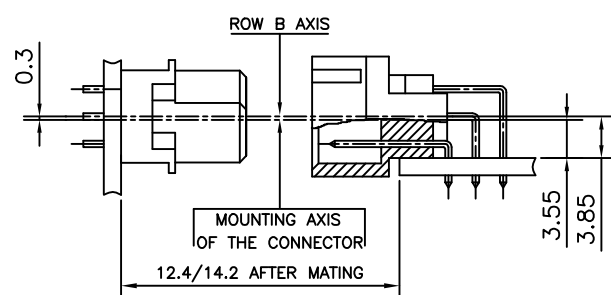

SERIES	8609	3	48	8	3	14	7	5	5	000E
ROWS FITTED WITH CONTACTS										
Rows a b c		3	48							
Rows a - c		4	32							
NUMBER OF CONTACTS										
TYPE OF INSULATOR										
3 ROW FEMALE INSULATOR		8								
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C/2		3								
TERMINATION										
LONG STRAIGHT SPILL (L - SEE TABLE)		14								
SHORT STRAIGHT SPILL (L - SEE TABLE)		24								
OPTIONS										
NO OPTION		7								
WITH HARPOONS		H								
PERFORMANCE CLASS										
DIN 41612 CLASS 3		4								
DIN 41612 CLASS 2		5								
DIN 41612 CLASS 1		6								
AS PER MIL C 55302/ JSS 50808		8								
PITCH PER ROW										
2.54		5								
000E1 E1LF TIN LEAD VERSION LEAD FREE VERSION										

b	19/06/2005	TECHNICAL SPECIFICATION MODIFIED AND LEAD FREE NOTE ADDED.
a	22/09/2004	DRAWING NO. WAS C-8609-0103 REV. b
INDEX	DATE	REVISION DESCRIPTION

ltr	Ecn no	Dr	date
b	I05-0042	MINI	19/05/2005
a	I04-0100	MINI	09/11/2004

						Tolerance LINEAR ± 0.1 ANGULAR $\pm 1^\circ$		Projection 		 MM	
Dr	Mini K Vandanath		22/09/2004		Product Family 8609				Size A3	Scale _____	
Eng	Rakhee George		22/09/2004		Spec ref						
Chr	Rakhee George		19/05/2005		Material SEE TECH. SPEC.				ECN		
Appr	K Somasundaram		19/05/2005								
		Title DIN STANDARD RECEPTACLE (STRAIGHT SPILL DIN 41612 STYLE-C/2)				Dwg no C-8609-2017				Rev b	
D/ENGG/EURO/8609		Catalog no 8609---8314--5XXXXX, 8609---8324--5XXXXX				CUSTOMER COPY				Sheet 1 of 1	