

CMPD6263  
CMPD6263A  
CMPD6263C  
CMPD6263S

**SURFACE MOUNT  
SILICON SCHOTTKY DIODES**



**SOT-23 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMPD6263 series types are Silicon Schottky diodes designed for low current surface mount fast switching applications requiring a low forward voltage drop.

The following configurations are available:

CMPD6263 SINGLE  
CMPD6263A DUAL, COMMON ANODE  
CMPD6263C DUAL, COMMON CATHODE  
CMPD6263S DUAL, IN SERIES

**MARKING CODE: D76**

**MARKING CODE: D98**

**MARKING CODE: D97**

**MARKING CODE: D96**

**MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$ )

Peak Repetitive Reverse Voltage  
Continuous Forward Current  
Peak Forward Surge Current,  $t_p=1.0\text{s}$   
Power Dissipation  
Operating and Storage Junction Temperature  
Thermal Resistance

**SYMBOL**

$V_{RRM}$  70  
 $I_F$  15  
 $I_{FSM}$  50  
 $P_D$  350  
 $T_J, T_{stg}$  -65 to +150  
 $\theta_{JA}$  357

**UNITS**

V  
mA  
mA  
mW  
 $^{\circ}\text{C}$   
 $^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS PER DIODE:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_R$	$V_R=50\text{V}$		98	200	nA
$BV_R$	$I_R=10\mu\text{A}$	70			V
$V_F$	$I_F=1.0\text{mA}$		395	410	mV
$C_T$	$V_R=0, f=1.0\text{MHz}$			2.0	pF

CMPD6263  
CMPD6263A  
CMPD6263C  
CMPD6263S


SURFACE MOUNT  
SILICON SCHOTTKY DIODES



### SOT-23 CASE - MECHANICAL OUTLINE

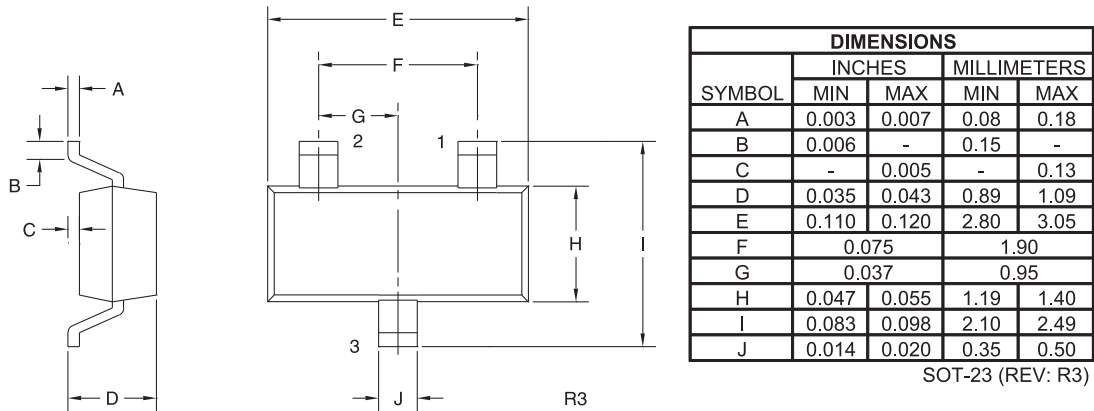

### PIN CONFIGURATIONS




**CMPD6263**

**LEAD CODE:**

- 1) Anode
- 2) No Connection
- 3) Cathode

**MARKING CODE: D76**




**CMPD6263A**

**LEAD CODE:**

- 1) Cathode D2
- 2) Cathode D1
- 3) Anode D1, D2

**MARKING CODE: D98**




**CMPD6263C**

**LEAD CODE:**

- 1) Anode D2
- 2) Anode D1
- 3) Cathode D1, D2

**MARKING CODE: D97**



**CMPD6263S**

**LEAD CODE:**

- 1) Anode D2
- 2) Cathode D1
- 3) Anode D1, Cathode D2

**MARKING CODE: D96**

R6 (27-January 2010)