


# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

- Direct Upgrades to TL07x and TL08x BiFET Operational Amplifiers
- Faster Slew Rate (20 V/ $\mu$ s Typ) Without Increased Power Consumption
- On-Chip Offset-Voltage Trimming for Improved DC Performance and Precision Grades Are Available (1.5 mV, TL051A)

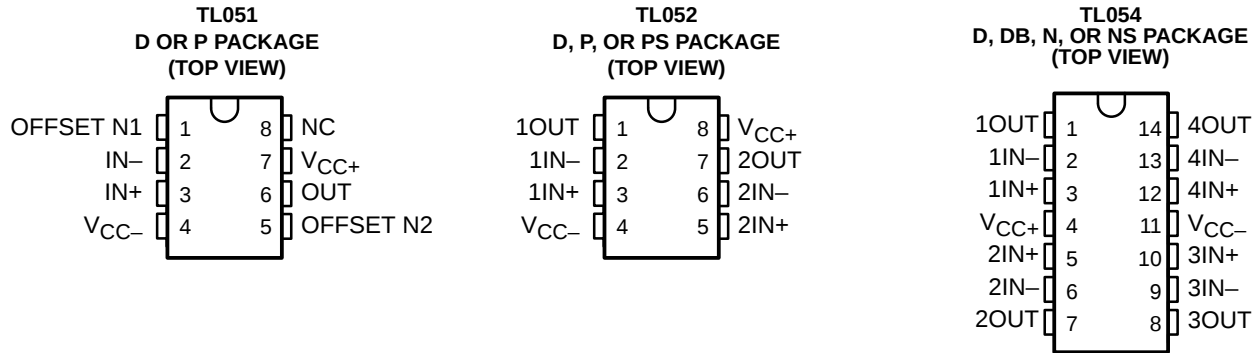

## description/ordering information

The TL05x series of JFET-input operational amplifiers offers improved dc and ac characteristics over the TL07x and TL08x families of BiFET operational amplifiers. On-chip Zener trimming of offset voltage yields precision grades as low as 1.5 mV (TL051A) for greater accuracy in dc-coupled applications. Texas Instruments improved BiFET process and optimized designs also yield improved bandwidth and slew rate without increased power consumption. The TL05x devices are pin-compatible with the TL07x and TL08x and can be used to upgrade existing circuits or for optimal performance in new designs.

BiFET operational amplifiers offer the inherently higher input impedance of the JFET-input transistors, without sacrificing the output drive associated with bipolar amplifiers. This makes them better suited for interfacing with high-impedance sensors or very low-level ac signals. They also feature inherently better ac response than bipolar or CMOS devices having comparable power consumption.

The TL05x family was designed to offer higher precision and better ac response than the TL08x, with the low noise floor of the TL07x. Designers requiring significantly faster ac response or ensured lower noise should consider the Excalibur TLE208x and TLE207x families of BiFET operational amplifiers.

Because BiFET operational amplifiers are designed for use with dual power supplies, care must be taken to observe common-mode input voltage limits and output swing when operating from a single supply. DC biasing of the input signal is required, and loads should be terminated to a virtual-ground node at mid-supply. Texas Instruments TLE2426 integrated virtual ground generator is useful when operating BiFET amplifiers from single supplies.

The TL05x are fully specified at  $\pm 15$  V and  $\pm 5$  V. For operation in low-voltage and/or single-supply systems, Texas Instruments LinCMOS families of operational amplifiers (TLC-prefix) are recommended. When moving from BiFET to CMOS amplifiers, particular attention should be paid to the slew rate and bandwidth requirements, and also the output loading.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2003, Texas Instruments Incorporated

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS


SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## ORDERING INFORMATION


| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGE†  |              | ORDERABLE<br>PART NUMBER | TOP-SIDE<br>MARKING |
|----------------|--------------------------------|-----------|--------------|--------------------------|---------------------|
| 0°C to 70°C    | 800 µV                         | PDIP (P)  | Tube of 50   | TL051ACP                 | TL051ACP            |
|                |                                |           |              | TL052ACP                 | TL052ACP            |
|                |                                | SOIC (D)  | Tube of 75   | TL051ACD                 | 051AC               |
|                |                                |           | Tube of 75   | TL052ACD                 | 052AC               |
|                |                                |           | Reel of 2500 | TL052ACDR                |                     |
|                | 1.5 mV                         | PDIP (P)  | Tube of 50   | TL051CP                  | TL051CP             |
|                |                                |           |              | TL052CP                  | TL052CP             |
|                |                                | PDIP (N)  | Tube of 25   | TL054ACN                 | TL054ACN            |
|                |                                |           |              | TL051CD                  | TL051C              |
|                |                                | SOIC (D)  | Reel of 2500 | TL051CDR                 |                     |
|                |                                |           | Tube of 75   | TL052CD                  | TL052C              |
|                |                                |           | Reel of 2500 | TL052CDR                 |                     |
|                |                                |           | Tube of 50   | TL054ACD                 | TL054C              |
|                |                                |           | Reel of 2500 | TL054ACDR                |                     |
|                |                                | SOP (PS)  | Reel of 2000 | TL052CPSR                | TL052               |
|                |                                | SSOP (DB) | Reel of 2000 | TL054CDBR                | TL054               |
|                | 4 mV                           | PDIP (N)  | Tube of 25   | TL054CN                  | TL054CN             |
|                |                                | SOIC (D)  | Tube of 50   | TL054CD                  | TL054C              |
|                |                                |           | Reel of 2500 | TL054CDR                 |                     |
|                |                                | SOP (NS)  | Reel of 2000 | TL054CNSR                | TL054               |
| –40°C to 85°C  | 800 µV                         | PDIP (P)  | Tube of 50   | TL052AIP                 | TL052AI             |
|                |                                | SOIC (D)  | Tube of 75   | TL052AID                 | 052AI               |
|                |                                |           | Reel of 2500 | TL052AIDR                |                     |
|                | 1.5 mV                         | PDIP (N)  | Tube of 25   | TL054AIN                 | TL054AIN            |
|                |                                | PDIP (P)  | Tube of 50   | TL051IP                  | TL051IP             |
|                |                                |           |              | TL052IP                  | TL052IP             |
|                |                                | SOIC (D)  | Tube of 75   | TL051ID                  | TL051I              |
|                |                                |           | Tube of 75   | TL052ID                  | TL052I              |
|                |                                |           | Reel of 2500 | TL052IDR                 |                     |
|                |                                |           | Tube of 50   | TL054AID                 | TL054AI             |
|                |                                |           | Reel of 2500 | TL054AIDR                |                     |
|                | 4 mV                           | PDIP (N)  | Tube of 25   | TL054IN                  | TL054IN             |
|                |                                | SOIC (D)  | Tube of 50   | TL054ID                  | TL054I              |
|                |                                |           | Reel of 2500 | TL054IDR                 |                     |

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

symbol (each amplifier)



equivalent schematic (each amplifier)

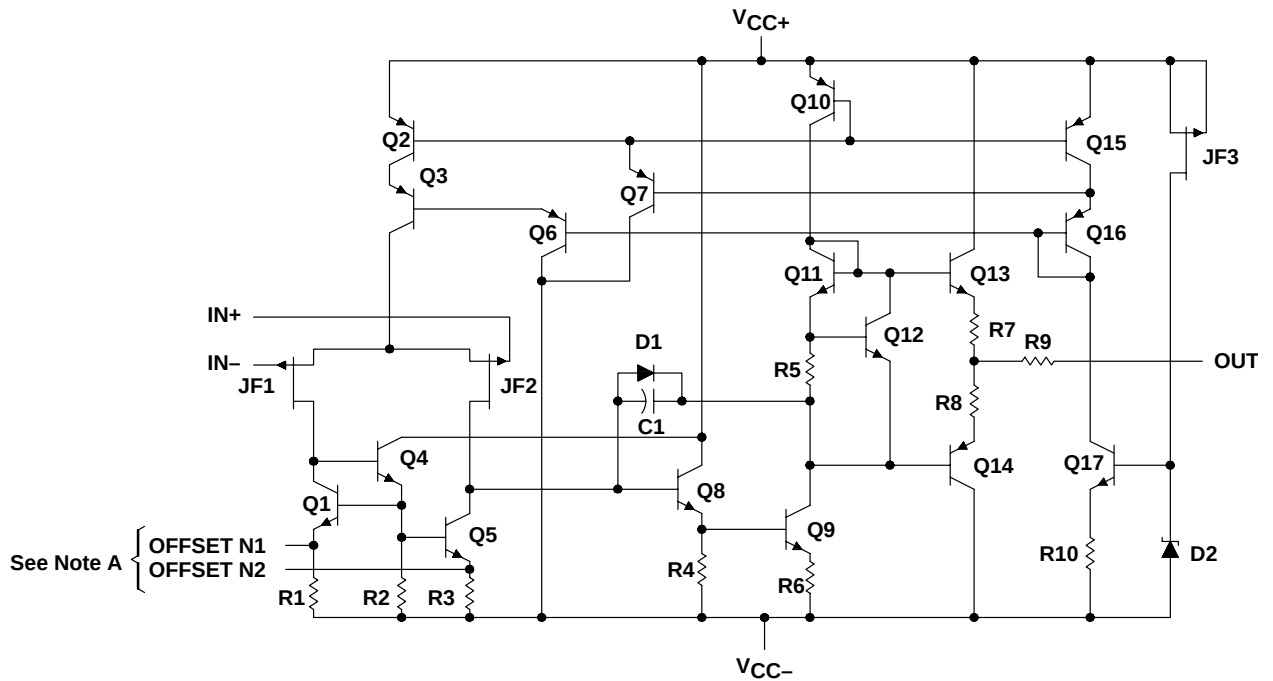

NOTE A: OFFSET N1 and OFFSET N2 are available only on the TL051x.

| ACTUAL DEVICE COMPONENT COUNT <sup>†</sup> |       |       |       |
|--------------------------------------------|-------|-------|-------|
| COMPONENT                                  | TL051 | TL052 | TL054 |
| Transistors                                | 20    | 34    | 62    |
| Resistors                                  | 10    | 19    | 37    |
| Diodes                                     | 2     | 3     | 5     |
| Capacitors                                 | 1     | 2     | 4     |

<sup>†</sup> These figures include all four amplifiers and all ESD, bias, and trim circuitry.

# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                                 |                |
|---------------------------------------------------------------------------------|----------------|
| Supply voltage, $V_{CC+}$ (see Note 1)                                          | 18 V           |
| Supply voltage, $V_{CC-}$ (see Note 1)                                          | –18 V          |
| Differential input voltage (see Note 2)                                         | ±30 V          |
| Input voltage range, $V_I$ (any input, see Notes 1 and 3)                       | ±15 V          |
| Input current, $I_I$ (each input)                                               | ±1 mA          |
| Output current, $I_O$ (each output)                                             | ±80 mA         |
| Total current into $V_{CC+}$                                                    | 160 mA         |
| Total current out of $V_{CC-}$                                                  | 160 mA         |
| Duration of short-circuit current at (or below) 25°C                            | Unlimited      |
| Package thermal impedance, $\theta_{JA}$ (see Notes 4 and 5): D package (8 pin) | 97°C/W         |
| D package (14 pin)                                                              | 86°C/W         |
| DB package (14 pin)                                                             | 96°C/W         |
| N package (14 pin)                                                              | 80°C/W         |
| NS package (14 pin)                                                             | 76°C/W         |
| P package (8 pin)                                                               | 85°C/W         |
| PS package (8 pin)                                                              | 95°C/W         |
| Operating virtual junction temperature, $T_J$                                   | 150°C          |
| Lead temperature 1,6 mm (1/16inch) from case for 10 seconds                     | 260°C          |
| Storage temperature range                                                       | –65°C to 150°C |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
  2. Differential voltages are at  $IN+$  with respect to  $IN-$ .
  3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
  4. Maximum power dissipation is a function of  $T_J(\text{max})$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can impact reliability.
  5. The package thermal impedance is calculated in accordance with JESD 51-7.

#### recommended operating conditions

|             |                                | C SUFFIX                       |     | I SUFFIX |     | UNIT |
|-------------|--------------------------------|--------------------------------|-----|----------|-----|------|
|             |                                | MIN                            | MAX | MIN      | MAX |      |
| $V_{CC\pm}$ | Supply voltage                 | ±5                             | ±15 | ±5       | ±15 | V    |
| $V_{IC}$    | Common-mode input voltage      | $V_{CC\pm} = \pm 5 \text{ V}$  |     | –1       | 4   | V    |
|             |                                | $V_{CC\pm} = \pm 15 \text{ V}$ |     | –11      | 11  |      |
| $T_A$       | Operating free-air temperature | 0                              | 70  | –40      | 85  | °C   |



**TL05x, TL05xA**  
**ENHANCED-JFET LOW-OFFSET**  
**OPERATIONAL AMPLIFIERS**

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

**TL051C and TL051AC electrical characteristics at specified free-air temperature**

| PARAMETER                                         |                                                                       | TEST CONDITIONS                                                                   |              | T <sub>A</sub> <sup>†</sup> | TL051C, TL051AC         |                  |               |                          |     |     | UNIT |
|---------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|-----------------------------|-------------------------|------------------|---------------|--------------------------|-----|-----|------|
|                                                   |                                                                       |                                                                                   |              |                             | V <sub>CC±</sub> = ±5 V |                  |               | V <sub>CC±</sub> = ±15 V |     |     |      |
|                                                   |                                                                       |                                                                                   |              |                             | MIN                     | TYP              | MAX           | MIN                      | TYP | MAX |      |
| V <sub>IO</sub>                                   | Input offset voltage                                                  | TL051C                                                                            | 25°C         | 0.75                        | 3.5                     | 0.59             | 1.5           | mV                       |     |     |      |
|                                                   |                                                                       |                                                                                   | Full range   | 4.5                         |                         | 2.5              |               |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | TL051AC      | 25°C                        | 0.55                    | 2.8              | 0.35          |                          | 0.8 |     |      |
|                                                   |                                                                       |                                                                                   |              | Full range                  | 3.8                     |                  | 1.8           |                          |     |     |      |
| α <sub>V<sub>IO</sub></sub>                       | Temperature coefficient of input offset voltage <sup>‡</sup>          | TL051C                                                                            | 25°C to 70°C | 8                           |                         | 8                |               | μV/°C                    |     |     |      |
|                                                   |                                                                       | TL051AC                                                                           | 25°C to 70°C | 8                           |                         | 8                | 25            |                          |     |     |      |
| Input offset-voltage long-term drift <sup>§</sup> |                                                                       |                                                                                   | 25°C         | 0.04                        |                         | 0.04             |               | μV/mo                    |     |     |      |
| I <sub>IO</sub>                                   | Input offset current                                                  | V <sub>O</sub> = 0, V <sub>IC</sub> = 0, See Figure 5                             | 25°C         | 4                           | 100                     | 5                | 100           | pA                       |     |     |      |
|                                                   |                                                                       |                                                                                   | 70°C         | 0.02                        | 1                       | 0.025            | 1             | nA                       |     |     |      |
| I <sub>IB</sub>                                   | Input bias current                                                    | V <sub>O</sub> = 0, V <sub>IC</sub> = 0, See Figure 5                             | 25°C         | 20                          | 200                     | 30               | 200           | pA                       |     |     |      |
|                                                   |                                                                       |                                                                                   | 70°C         | 0.15                        | 4                       | 0.2              | 4             | nA                       |     |     |      |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                                       |                                                                                   | 25°C         | -1 to 4                     | -2.3 to 5.6             | -11 to 11        | -12.3 to 15.6 | V                        |     |     |      |
|                                                   |                                                                       |                                                                                   | Full range   | -1 to 4                     |                         | -11 to 11        |               |                          |     |     |      |
| V <sub>OM+</sub>                                  | Maximum positive peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                            | 25°C         | 3                           | 4.2                     | 13               | 13.9          | V                        |     |     |      |
|                                                   |                                                                       |                                                                                   | Full range   | 3                           |                         | 13               |               |                          |     |     |      |
|                                                   |                                                                       | R <sub>L</sub> = 2 kΩ                                                             | 25°C         | 2.5                         | 3.8                     | 11.5             | 12.7          |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | Full range   | 2.5                         |                         | 11.5             |               |                          |     |     |      |
| V <sub>OM-</sub>                                  | Maximum negative peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                            | 25°C         | -2.5                        | -3.5                    | -12              | -13.2         | V                        |     |     |      |
|                                                   |                                                                       |                                                                                   | Full range   | -2.5                        |                         | -12              |               |                          |     |     |      |
|                                                   |                                                                       | R <sub>L</sub> = 2 kΩ                                                             | 25°C         | -2.3                        | -3.2                    | -11              | -12           |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | Full range   | -2.3                        |                         | -11              |               |                          |     |     |      |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification <sup>¶</sup>          | R <sub>L</sub> = 2 kΩ                                                             | 25°C         | 25                          | 59                      | 50               | 105           | V/mV                     |     |     |      |
|                                                   |                                                                       |                                                                                   | 0°C          | 30                          | 65                      | 60               | 129           |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | 70°C         | 20                          | 46                      | 30               | 85            |                          |     |     |      |
| r <sub>i</sub>                                    | Input resistance                                                      |                                                                                   | 25°C         | 10 <sup>12</sup>            |                         | 10 <sup>12</sup> |               | Ω                        |     |     |      |
| c <sub>i</sub>                                    | Input capacitance                                                     |                                                                                   | 25°C         | 10                          |                         | 12               |               | pF                       |     |     |      |
| CMRR                                              | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICRmin</sub> , V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω | 25°C         | 65                          | 85                      | 75               | 93            | dB                       |     |     |      |
|                                                   |                                                                       |                                                                                   | 0°C          | 65                          | 84                      | 75               | 92            |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | 70°C         | 65                          | 84                      | 75               | 91            |                          |     |     |      |
| k <sub>SVR</sub>                                  | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω                                         | 25°C         | 75                          | 99                      | 75               | 99            | dB                       |     |     |      |
|                                                   |                                                                       |                                                                                   | 0°C          | 75                          | 98                      | 75               | 98            |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | 70°C         | 75                          | 97                      | 75               | 97            |                          |     |     |      |
| I <sub>CC</sub>                                   | Supply current                                                        | V <sub>O</sub> = 0, No load                                                       | 25°C         | 2.6                         | 3.2                     | 2.7              | 3.2           | mA                       |     |     |      |
|                                                   |                                                                       |                                                                                   | 0°C          | 2.7                         | 3.2                     | 2.8              | 3.2           |                          |     |     |      |
|                                                   |                                                                       |                                                                                   | 70°C         | 2.6                         | 3.2                     | 2.7              | 3.2           |                          |     |     |      |

<sup>†</sup> Full range is 0°C to 70°C.

<sup>‡</sup> This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>§</sup> Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T<sub>A</sub> = 150°C, extrapolated to T<sub>A</sub> = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

<sup>¶</sup> For V<sub>CC±</sub> = ±5 V, V<sub>O</sub> = ±2.3 V, or for V<sub>CC±</sub> = ±15 V, V<sub>O</sub> = ±10 V.



# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### TL051C and TL051AC operating characteristics at specified free-air temperature

| PARAMETER           |                                               | TEST CONDITIONS                                                                                            |                                        | T <sub>A</sub> <sup>†</sup> | TL051C, TL051AC         |     |     |                          |      |     | UNIT   |
|---------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------------------|-----------------------------|-------------------------|-----|-----|--------------------------|------|-----|--------|
|                     |                                               |                                                                                                            |                                        |                             | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |      |     |        |
|                     |                                               |                                                                                                            |                                        |                             | MIN                     | TYP | MAX | MIN                      | TYP  | MAX |        |
| SR+                 | Positive slew rate at unity gain <sup>‡</sup> | R <sub>L</sub> = 2 kΩ,<br>See Figure 1                                                                     | C <sub>L</sub> = 100 pF,               | 25°C                        | 16                      |     |     | 13                       | 20   |     | V/μs   |
|                     |                                               |                                                                                                            |                                        | Full range                  | 16.4                    |     |     | 11                       | 22.6 |     |        |
| SR–                 | Negative slew rate at unity gain <sup>‡</sup> |                                                                                                            |                                        | 25°C                        | 15                      |     |     | 13                       | 18   |     |        |
|                     |                                               |                                                                                                            |                                        | Full range                  | 16                      |     |     | 11                       | 19.3 |     |        |
| t <sub>r</sub>      | Rise time                                     | V <sub>I</sub> (PP) = ±10 mV,<br>R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF,<br>See Figures 1 and 2 | 25°C                                   | 55                          |                         |     | 56  |                          |      | ns  |        |
|                     |                                               |                                                                                                            | 0°C                                    | 54                          |                         |     | 55  |                          |      |     |        |
|                     |                                               |                                                                                                            | 70°C                                   | 63                          |                         |     | 63  |                          |      |     |        |
| t <sub>f</sub>      | Fall time                                     |                                                                                                            | 25°C                                   | 55                          |                         |     | 57  |                          |      |     |        |
|                     |                                               |                                                                                                            | 0°C                                    | 54                          |                         |     | 56  |                          |      |     |        |
|                     |                                               |                                                                                                            | 70°C                                   | 62                          |                         |     | 64  |                          |      |     |        |
| Overshoot factor    | 25°C                                          |                                                                                                            | 24                                     |                             |                         | 19  |     |                          | %    |     |        |
|                     | 0°C                                           |                                                                                                            | 24                                     |                             |                         | 19  |     |                          |      |     |        |
|                     | 70°C                                          |                                                                                                            | 24                                     |                             |                         | 19  |     |                          |      |     |        |
| V <sub>n</sub>      | Equivalent input noise voltage <sup>§</sup>   |                                                                                                            | R <sub>S</sub> = 20 Ω,<br>See Figure 3 | f = 10 Hz                   | 25°C                    | 75  |     |                          | 75   |     |        |
|                     |                                               | f = 1 kHz                                                                                                  |                                        | 25°C                        | 18                      |     |     | 18                       | 30   |     |        |
| V <sub>N</sub> (PP) | Peak-to-peak equivalent input noise voltage   |                                                                                                            |                                        | f = 10 Hz to 10 kHz         | 25°C                    | 4   |     |                          | 4    |     |        |
| I <sub>n</sub>      | Equivalent input noise current                | f = 1 kHz                                                                                                  |                                        | 25°C                        | 0.01                    |     |     | 0.01                     |      |     | pA/√Hz |
| THD                 | Total harmonic distortion <sup>¶</sup>        | R <sub>S</sub> = 1 kΩ,<br>f = 1 kHz                                                                        | R <sub>L</sub> = 2 kΩ,                 | 25°C                        | 0.003                   |     |     | 0.003                    |      |     | %      |
| B <sub>1</sub>      | Unity-gain bandwidth                          | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                         | R <sub>L</sub> = 2 kΩ,<br>See Figure 4 | 25°C                        | 3                       |     |     | 3.1                      |      |     | MHz    |
|                     |                                               |                                                                                                            |                                        | 0°C                         | 3.2                     |     |     | 3.3                      |      |     |        |
|                     |                                               |                                                                                                            |                                        | 70°C                        | 2.7                     |     |     | 2.8                      |      |     |        |
| φ <sub>m</sub>      | Phase margin at unity gain                    | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                         | R <sub>L</sub> = 2 kΩ,<br>See Figure 4 | 25°C                        | 59                      |     |     | 62                       |      |     | deg    |
|                     |                                               |                                                                                                            |                                        | 0°C                         | 58                      |     |     | 62                       |      |     |        |
|                     |                                               |                                                                                                            |                                        | 70°C                        | 59                      |     |     | 62                       |      |     |        |

$^\dagger$  Full range is 0°C to 70°C.

$^\ddagger$  For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_I(\text{PP}) = \pm 1 \text{ V}$ ; for  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_I(\text{PP}) = \pm 5 \text{ V}$ .

$^\S$  This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

$^\P$  For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_O(\text{RMS}) = 1 \text{ V}$ ; for  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_O(\text{RMS}) = 6 \text{ V}$ .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TL051I and TL051AI electrical characteristics at specified free-air temperature

| PARAMETER                             |                                                                       | TEST CONDITIONS                                                                   |              | T <sub>A</sub> <sup>†</sup> | TL051I, TL051AI         |                  |               |                          |     |     | UNIT |
|---------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|-----------------------------|-------------------------|------------------|---------------|--------------------------|-----|-----|------|
|                                       |                                                                       |                                                                                   |              |                             | V <sub>CC±</sub> = ±5 V |                  |               | V <sub>CC±</sub> = ±15 V |     |     |      |
|                                       |                                                                       |                                                                                   |              |                             | MIN                     | TYP              | MAX           | MIN                      | TYP | MAX |      |
| V <sub>IO</sub>                       | Input offset voltage                                                  | TL051I                                                                            | 25°C         | 0.75                        | 3.5                     | 0.59             | 1.5           | mV                       |     |     |      |
|                                       |                                                                       |                                                                                   | Full range   | 5.3                         |                         | 3.3              |               |                          |     |     |      |
|                                       |                                                                       |                                                                                   | TL051AI      | 25°C                        | 0.55                    | 2.8              | 0.35          |                          | 0.8 |     |      |
|                                       |                                                                       |                                                                                   |              | Full range                  | 4.6                     |                  | 2.6           |                          |     |     |      |
| α <sub>V<sub>IO</sub></sub>           | Temperature coefficient of input offset voltage‡                      | TL051I                                                                            | 25°C to 85°C | 7                           |                         | 8                |               | μV/°C                    |     |     |      |
|                                       |                                                                       | TL051AI                                                                           | 25°C to 85°C | 8                           |                         | 8                | 25            |                          |     |     |      |
| Input offset-voltage long-term drift§ |                                                                       |                                                                                   | 25°C         | 0.04                        |                         | 0.04             |               | μV/mo                    |     |     |      |
| I <sub>IO</sub>                       | Input offset current                                                  | V <sub>O</sub> = 0, V <sub>IC</sub> = 0, See Figure 5                             | 25°C         | 4                           | 100                     | 5                | 100           | pA                       |     |     |      |
|                                       |                                                                       |                                                                                   | 85°C         | 0.06                        | 10                      | 0.07             | 10            | nA                       |     |     |      |
| I <sub>IB</sub>                       | Input bias current                                                    | V <sub>O</sub> = 0, V <sub>IC</sub> = 0, See Figure 5                             | 25°C         | 20                          | 200                     | 30               | 200           | pA                       |     |     |      |
|                                       |                                                                       |                                                                                   | 85°C         | 0.6                         | 20                      | 0.7              | 20            | nA                       |     |     |      |
| V <sub>ICR</sub>                      | Common-mode input voltage range                                       |                                                                                   | 25°C         | −1 to 4                     | −2.3 to 5.6             | −11 to 11        | −12.3 to 15.6 | V                        |     |     |      |
|                                       |                                                                       |                                                                                   | Full range   | −1 to 4                     |                         | −11 to 11        |               |                          |     |     |      |
| V <sub>OM</sub> +                     | Maximum positive peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                            | 25°C         | 3                           | 4.2                     | 13               | 13.9          | V                        |     |     |      |
|                                       |                                                                       |                                                                                   | Full range   | 3                           |                         | 13               |               |                          |     |     |      |
|                                       |                                                                       | R <sub>L</sub> = 2 kΩ                                                             | 25°C         | 2.5                         | 3.8                     | 11.5             | 12.7          |                          |     |     |      |
|                                       |                                                                       |                                                                                   | Full range   | 2.5                         |                         | 11.5             |               |                          |     |     |      |
| V <sub>OM</sub> −                     | Maximum negative peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                            | 25°C         | −2.5                        | −3.5                    | −12              | −13.2         | V                        |     |     |      |
|                                       |                                                                       |                                                                                   | Full range   | −2.5                        |                         | −12              |               |                          |     |     |      |
|                                       |                                                                       | R <sub>L</sub> = 2 kΩ                                                             | 25°C         | −2.3                        | −3.2                    | −11              | −12           |                          |     |     |      |
|                                       |                                                                       |                                                                                   | Full range   | −2.3                        |                         | −11              |               |                          |     |     |      |
| A <sub>VD</sub>                       | Large-signal differential voltage amplification¶                      | R <sub>L</sub> = 2 kΩ                                                             | 25°C         | 25                          | 59                      | 50               | 105           | V/mV                     |     |     |      |
|                                       |                                                                       |                                                                                   | −40°C        | 30                          | 74                      | 60               | 145           |                          |     |     |      |
|                                       |                                                                       |                                                                                   | 85°C         | 20                          | 43                      | 30               | 76            |                          |     |     |      |
| r <sub>i</sub>                        | Input resistance                                                      |                                                                                   | 25°C         | 10 <sup>12</sup>            |                         | 10 <sup>12</sup> |               | Ω                        |     |     |      |
| c <sub>i</sub>                        | Input capacitance                                                     |                                                                                   | 25°C         | 10                          |                         | 12               |               | pF                       |     |     |      |
| CMRR                                  | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICRmin</sub> , V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω | 25°C         | 65                          | 85                      | 75               | 93            | dB                       |     |     |      |
|                                       |                                                                       |                                                                                   | −40°C        | 65                          | 83                      | 75               | 90            |                          |     |     |      |
|                                       |                                                                       |                                                                                   | 85°C         | 65                          | 84                      | 75               | 93            |                          |     |     |      |
| k <sub>SVR</sub>                      | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω                                         | 25°C         | 75                          | 99                      | 75               | 99            | dB                       |     |     |      |
|                                       |                                                                       |                                                                                   | −40°C        | 75                          | 98                      | 75               | 98            |                          |     |     |      |
|                                       |                                                                       |                                                                                   | 85°C         | 75                          | 99                      | 75               | 99            |                          |     |     |      |
| I <sub>CC</sub>                       | Supply current                                                        | V <sub>O</sub> = 0, No load                                                       | 25°C         | 2.6                         | 3.2                     | 2.7              | 3.2           | mA                       |     |     |      |
|                                       |                                                                       |                                                                                   | −40°C        | 2.4                         | 3.2                     | 2.6              | 3.2           |                          |     |     |      |
|                                       |                                                                       |                                                                                   | 85°C         | 2.5                         | 3.2                     | 2.6              | 3.2           |                          |     |     |      |

<sup>†</sup> Full range is -40°C to 85°C

<sup>‡</sup> This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>§</sup> Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T<sub>A</sub> = 150°C, extrapolated to T<sub>A</sub> = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

<sup>¶</sup> For V<sub>CC±</sub> = ±5 V, V<sub>O</sub> = ±2.3 V, or for V<sub>CC±</sub> = ±15 V, V<sub>O</sub> = ±10 V.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### TL051I and TL051AI operating characteristics at specified free-air temperature

| PARAMETER           |                                               | TEST CONDITIONS                                                                                   |                                     | T <sub>A</sub> <sup>†</sup> | TL051I, TL051AI         |     |     |                          |     |     | UNIT   |
|---------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|-------------------------|-----|-----|--------------------------|-----|-----|--------|
|                     |                                               |                                                                                                   |                                     |                             | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |     |     |        |
|                     |                                               |                                                                                                   |                                     |                             | MIN                     | TYP | MAX | MIN                      | TYP | MAX |        |
| SR+                 | Positive slew rate at unity gain <sup>‡</sup> | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figure 1                                      |                                     | 25°C                        | 16                      |     |     | 13                       | 20  |     | V/μs   |
|                     | Full range                                    |                                                                                                   |                                     |                             |                         |     | 11  |                          |     |     |        |
| SR–                 | Negative slew rate at unity gain <sup>‡</sup> |                                                                                                   |                                     | 25°C                        | 15                      |     |     | 13                       | 18  |     |        |
|                     |                                               |                                                                                                   |                                     | Full range                  |                         |     |     | 11                       |     |     |        |
| t <sub>r</sub>      | Rise time                                     | V <sub>I</sub> (PP) = ±10 mV, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figures 1 and 2 |                                     | 25°C                        | 55                      |     |     | 56                       |     |     | ns     |
|                     |                                               |                                                                                                   |                                     | –40°C                       | 52                      |     |     | 53                       |     |     |        |
|                     |                                               |                                                                                                   |                                     | 85°C                        | 64                      |     |     | 65                       |     |     |        |
| t <sub>f</sub>      | Fall time                                     |                                                                                                   |                                     | 25°C                        | 55                      |     |     | 57                       |     |     |        |
|                     |                                               |                                                                                                   |                                     | –40°C                       | 51                      |     |     | 53                       |     |     |        |
|                     |                                               |                                                                                                   |                                     | 85°C                        | 64                      |     |     | 65                       |     |     |        |
| Overshoot factor    |                                               |                                                                                                   |                                     | 25°C                        | 24                      |     |     | 19                       |     |     | %      |
|                     |                                               |                                                                                                   |                                     | –40°C                       | 24                      |     |     | 19                       |     |     |        |
|                     |                                               | 85°C                                                                                              | 24                                  |                             |                         | 19  |     |                          |     |     |        |
| V <sub>n</sub>      | Equivalent input noise voltage <sup>§</sup>   | R <sub>S</sub> = 20 Ω, See Figure 3                                                               | f = 10 Hz                           | 25°C                        | 75                      |     |     | 75                       |     |     | nV/√Hz |
|                     |                                               |                                                                                                   | f = 1 kHz                           | 25°C                        | 18                      |     |     | 18 30                    |     |     |        |
| V <sub>N</sub> (PP) | Peak-to-peak equivalent input noise voltage   |                                                                                                   |                                     | f = 10 Hz to 10 kHz         | 25°C                    | 4   |     |                          | 4   |     |        |
| I <sub>n</sub>      | Equivalent input noise current                | f = 1 kHz                                                                                         |                                     | 25°C                        | 0.01                    |     |     | 0.01                     |     |     | pA/√Hz |
| THD                 | Total harmonic distortion <sup>¶</sup>        | R <sub>S</sub> = 1 kΩ, f = 1 kHz                                                                  | R <sub>L</sub> = 2 kΩ,              | 25°C                        | 0.003                   |     |     | 0.003                    |     |     | %      |
| B <sub>1</sub>      | Unity-gain bandwidth                          | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                   | R <sub>L</sub> = 2 kΩ, See Figure 4 | 25°C                        | 3                       |     |     | 3.1                      |     |     | MHz    |
|                     |                                               |                                                                                                   |                                     | –40°C                       | 3.5                     |     |     | 3.6                      |     |     |        |
|                     |                                               |                                                                                                   |                                     | 85°C                        | 2.6                     |     |     | 2.7                      |     |     |        |
| φ <sub>m</sub>      | Phase margin at unity gain                    | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                   | R <sub>L</sub> = 2 kΩ, See Figure 4 | 25°C                        | 59                      |     |     | 62                       |     |     | deg    |
|                     |                                               |                                                                                                   |                                     | –40°C                       | 58                      |     |     | 61                       |     |     |        |
|                     |                                               |                                                                                                   |                                     | 85°C                        | 59                      |     |     | 62                       |     |     |        |

<sup>†</sup> Full range is –40°C to 85°C.

<sup>‡</sup> For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_I(\text{PP}) = \pm 1 \text{ V}$ ; for  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_I(\text{PP}) = \pm 5 \text{ V}$ .

<sup>§</sup> This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>¶</sup> For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_O(\text{RMS}) = 1 \text{ V}$ ; for  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_O(\text{RMS}) = 6 \text{ V}$ .



**TL05x, TL05xA**  
**ENHANCED-JFET LOW-OFFSET**  
**OPERATIONAL AMPLIFIERS**

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

**TL052C and TL052AC electrical characteristics at specified free-air temperature**

| PARAMETER                                         |                                                              | TEST CONDITIONS                                                                         |                      | T <sub>A</sub> <sup>†</sup> | TL052C, TL052AC         |             |           |                          |                  |       | UNIT |
|---------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------|-----------------------------|-------------------------|-------------|-----------|--------------------------|------------------|-------|------|
|                                                   |                                                              |                                                                                         |                      |                             | V <sub>CC±</sub> = ±5 V |             |           | V <sub>CC±</sub> = ±15 V |                  |       |      |
|                                                   |                                                              |                                                                                         |                      |                             | MIN                     | TYP         | MAX       | MIN                      | TYP              | MAX   |      |
| V <sub>IO</sub>                                   | Input offset voltage                                         | V <sub>O</sub> = 0,<br>V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω                    | TL052C               | 25°C                        | 0.73                    |             | 3.5       | 0.65                     |                  | 1.5   | mV   |
|                                                   |                                                              |                                                                                         |                      | Full range                  |                         |             | 4.5       |                          |                  | 2.5   |      |
|                                                   |                                                              |                                                                                         | TL052AC              | 25°C                        | 0.51                    |             | 2.8       | 0.4                      |                  | 0.8   |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  |                         |             | 3.8       |                          |                  | 1.8   |      |
| α <sub>V<sub>IO</sub></sub>                       | Temperature coefficient of input offset voltage <sup>‡</sup> |                                                                                         | TL052C               | 25°C to 70°C                | 8                       |             |           |                          | 8                | μV/°C |      |
|                                                   |                                                              |                                                                                         | TL052AC              | 25°C to 70°C                | 8                       |             |           |                          | 6                |       | 25   |
| Input offset-voltage long-term drift <sup>§</sup> |                                                              | V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω                                            | V <sub>IC</sub> = 0, | 25°C                        | 0.04                    |             |           |                          | 0.04             | μV/mo |      |
| I <sub>IO</sub>                                   | Input offset current                                         | V <sub>O</sub> = 0,<br>See Figure 5                                                     | V <sub>IC</sub> = 0, | 25°C                        | 4                       |             | 100       | 5                        |                  | 100   | pA   |
|                                                   |                                                              |                                                                                         |                      | 70°C                        | 0.02                    |             | 1         | 0.025                    |                  | 1     | nA   |
| I <sub>IB</sub>                                   | Input bias current                                           | V <sub>O</sub> = 0,<br>See Figure 5                                                     | V <sub>IC</sub> = 0, | 25°C                        | 20                      |             | 200       | 30                       |                  | 200   | pA   |
|                                                   |                                                              |                                                                                         |                      | 70°C                        | 0.15                    |             | 4         | 0.2                      |                  | 4     | nA   |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                              |                                                                                         |                      | 25°C                        | –1 to 4                 | –2.3 to 5.6 | –11 to 11 |                          | –12.3 to 15.6    | V     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | –1 to 4                 |             | –11 to 11 |                          |                  |       |      |
| V <sub>OM+</sub>                                  | Maximum positive peak output voltage swing                   | R <sub>L</sub> = 10 kΩ                                                                  |                      | 25°C                        | 3                       |             | 4.2       | 13                       |                  | 13.9  | V    |
|                                                   |                                                              |                                                                                         |                      | Full range                  | 3                       |             |           |                          | 13               |       |      |
|                                                   |                                                              | R <sub>L</sub> = 2 kΩ                                                                   |                      | 25°C                        | 2.5                     |             | 3.8       | 11.5                     |                  | 12.7  |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | 2.5                     |             |           |                          | 11.5             |       |      |
| V <sub>OM–</sub>                                  | Maximum negative peak output voltage swing                   | R <sub>L</sub> = 10 kΩ                                                                  |                      | 25°C                        | –2.5                    |             | –3.5      | –12                      |                  | –13.2 | V    |
|                                                   |                                                              |                                                                                         |                      | Full range                  | –2.5                    |             |           |                          | –12              |       |      |
|                                                   |                                                              | R <sub>L</sub> = 2 kΩ                                                                   |                      | 25°C                        | –2.3                    |             | –3.2      | –11                      |                  | –12   |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | –2.3                    |             |           |                          | –11              |       |      |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification <sup>¶</sup> | R <sub>L</sub> = 2 kΩ                                                                   |                      | 25°C                        | 25                      |             | 59        | 50                       |                  | 105   | V/mV |
|                                                   |                                                              |                                                                                         |                      | 0°C                         | 30                      |             | 65        | 60                       |                  | 129   |      |
|                                                   |                                                              |                                                                                         |                      | 70°C                        | 20                      |             | 46        | 30                       |                  | 85    |      |
| r <sub>i</sub>                                    | Input resistance                                             |                                                                                         |                      | 25°C                        | 10 <sup>12</sup>        |             |           |                          | 10 <sup>12</sup> | Ω     |      |
| c <sub>i</sub>                                    | Input capacitance                                            |                                                                                         |                      | 25°C                        | 10                      |             |           |                          | 12               | pF    |      |
| CMRR                                              | Common-mode rejection ratio                                  | V <sub>IC</sub> = V <sub>ICRmin</sub> ,<br>V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω |                      | 25°C                        | 65                      |             | 85        | 75                       |                  | 93    | dB   |
|                                                   |                                                              |                                                                                         |                      | 0°C                         | 65                      |             | 84        | 75                       |                  | 92    |      |
|                                                   |                                                              |                                                                                         |                      | 70°C                        | 65                      |             | 84        | 75                       |                  | 91    |      |

<sup>†</sup> Full range is 0°C to 70°C.

<sup>‡</sup> This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>§</sup> Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$ , extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

<sup>¶</sup> For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_O = \pm 2.3 \text{ V}$ ; at  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_O = \pm 10 \text{ V}$ .



# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### TL052C and TL052AC electrical characteristics at specified free-air temperature (continued)

| PARAMETER                        |                                                                       | TEST CONDITIONS       |                       | T <sub>A</sub> | TL052C, TL052AC         |     |     |                          |     |     | UNIT |
|----------------------------------|-----------------------------------------------------------------------|-----------------------|-----------------------|----------------|-------------------------|-----|-----|--------------------------|-----|-----|------|
|                                  |                                                                       |                       |                       |                | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |     |     |      |
|                                  |                                                                       |                       |                       |                | MIN                     | TYP | MAX | MIN                      | TYP | MAX |      |
| k <sub>SVR</sub>                 | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>O</sub> = 0,   | R <sub>S</sub> = 50 Ω | 25°C           | 75                      | 99  |     | 75                       | 99  |     | dB   |
|                                  |                                                                       |                       |                       | 0°C            | 75                      | 98  |     | 75                       | 98  |     |      |
|                                  |                                                                       |                       |                       | 70°C           | 75                      | 97  |     | 75                       | 97  |     |      |
| I <sub>CC</sub>                  | Supply current (two amplifiers)                                       | V <sub>O</sub> = 0,   | No load               | 25°C           |                         | 4.6 | 5.6 |                          | 4.8 | 5.6 | mA   |
|                                  |                                                                       |                       |                       | 0°C            |                         | 4.7 | 6.4 |                          | 4.8 | 6.4 |      |
|                                  |                                                                       |                       |                       | 70°C           |                         | 4.4 | 6.4 |                          | 4.6 | 6.4 |      |
| V <sub>O1</sub> /V <sub>O2</sub> | Crosstalk attenuation                                                 | A <sub>VD</sub> = 100 |                       | 25°C           |                         | 120 |     |                          | 120 |     | dB   |

#### TL052C and TL052AC operating characteristics at specified free-air temperature

| PARAMETER           |                                             | TEST CONDITIONS                                                                                            |                                        | T <sub>A</sub> <sup>†</sup> | TL052C, TL052AC         |     |     |                          |     |      | UNIT   |
|---------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------------------|-----------------------------|-------------------------|-----|-----|--------------------------|-----|------|--------|
|                     |                                             |                                                                                                            |                                        |                             | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |     |      |        |
|                     |                                             |                                                                                                            |                                        |                             | MIN                     | TYP | MAX | MIN                      | TYP | MAX  |        |
| SR+                 | Slew rate at unity gain                     | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF,<br>See Figure 1                                            | 25°C                                   | 17.8                        |                         |     | 9   | 20.7                     |     | V/μs |        |
|                     |                                             |                                                                                                            | Full range                             |                             |                         |     | 8   |                          |     |      |        |
| SR−                 | Negative slew rate at unity gain‡           |                                                                                                            | 25°C                                   | 15.4                        |                         |     | 9   | 17.8                     |     |      |        |
|                     |                                             |                                                                                                            | Full range                             |                             |                         |     | 8   |                          |     |      |        |
| t <sub>r</sub>      | Rise time                                   | V <sub>I</sub> (PP) = ±10 mV,<br>R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF,<br>See Figures 1 and 2 | 25°C                                   | 55                          |                         |     | 56  |                          |     | ns   |        |
|                     |                                             |                                                                                                            | 0°C                                    | 54                          |                         |     | 55  |                          |     |      |        |
|                     |                                             |                                                                                                            | 70°C                                   | 63                          |                         |     | 63  |                          |     |      |        |
| t <sub>f</sub>      | Fall time                                   |                                                                                                            | 25°C                                   | 55                          |                         |     | 57  |                          |     |      |        |
|                     |                                             |                                                                                                            | 0°C                                    | 54                          |                         |     | 56  |                          |     |      |        |
|                     |                                             |                                                                                                            | 70°C                                   | 62                          |                         |     | 64  |                          |     |      |        |
| Overshoot factor    | 25°C                                        |                                                                                                            | 24                                     |                             |                         | 19  |     |                          | %   |      |        |
|                     | 0°C                                         |                                                                                                            | 24                                     |                             |                         | 19  |     |                          |     |      |        |
|                     | 70°C                                        |                                                                                                            | 24                                     |                             |                         | 19  |     |                          |     |      |        |
| V <sub>n</sub>      | Equivalent input noise voltage§             |                                                                                                            | R <sub>S</sub> = 20 Ω,<br>See Figure 3 | f = 10 Hz                   | 25°C                    | 71  |     |                          | 71  |      |        |
|                     |                                             | f = 1 kHz                                                                                                  |                                        | 25°C                        | 19                      |     |     | 19 30                    |     |      |        |
| V <sub>N</sub> (PP) | Peak-to-peak equivalent input noise current | f = 10 Hz to 10 kHz                                                                                        |                                        | 25°C                        | 4                       |     |     | 4                        |     |      | μV     |
| I <sub>n</sub>      | Equivalent input noise current              | f = 1 kHz                                                                                                  |                                        | 25°C                        | 0.01                    |     |     | 0.01                     |     |      | pA/√Hz |
| THD                 | Total harmonic distortion¶                  | R <sub>S</sub> = 1 kΩ,<br>f = 1 kHz                                                                        | R <sub>L</sub> = 2 kΩ,                 | 25°C                        | 0.003                   |     |     | 0.003                    |     |      | %      |
| B <sub>1</sub>      | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,<br>See Figure 4                                         | R <sub>L</sub> = 2 kΩ,<br>See Figure 4 | 25°C                        | 3                       |     |     | 3                        |     |      | MHz    |
|                     |                                             |                                                                                                            |                                        | 0°C                         | 3.2                     |     |     | 3.2                      |     |      |        |
|                     |                                             |                                                                                                            |                                        | 70°C                        | 2.6                     |     |     | 2.7                      |     |      |        |
| ϕ <sub>m</sub>      | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,<br>See Figure 4                                         | R <sub>L</sub> = 2 kΩ,<br>See Figure 4 | 25°C                        | 60                      |     |     | 63                       |     |      | deg    |
|                     |                                             |                                                                                                            |                                        | 0°C                         | 59                      |     |     | 63                       |     |      |        |
|                     |                                             |                                                                                                            |                                        | 70°C                        | 60                      |     |     | 63                       |     |      |        |

<sup>†</sup> Full range is 0°C to 70°C.

<sup>‡</sup> For V<sub>CC±</sub> = ±5 V, V<sub>I</sub>(PP) = ±1 V; for V<sub>CC±</sub> = ±15 V, V<sub>I</sub>(PP) = ±5 V.

<sup>§</sup> This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>¶</sup> For V<sub>CC±</sub> = ±5 V, V<sub>O</sub>(RMS) = 1 V; for V<sub>CC±</sub> = ±15 V, V<sub>O</sub>(RMS) = 6 V.



**TL05x, TL05xA**  
**ENHANCED-JFET LOW-OFFSET**  
**OPERATIONAL AMPLIFIERS**

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

**TL052I and TL052AI electrical characteristics at specified free-air temperature**

| PARAMETER                                         |                                                              | TEST CONDITIONS                                                                         |                      | T <sub>A</sub> <sup>†</sup> | TL052I, TL052AI         |                  |           |                          |      |     | UNIT |
|---------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------|-----------------------------|-------------------------|------------------|-----------|--------------------------|------|-----|------|
|                                                   |                                                              |                                                                                         |                      |                             | V <sub>CC±</sub> = ±5 V |                  |           | V <sub>CC±</sub> = ±15 V |      |     |      |
|                                                   |                                                              |                                                                                         |                      |                             | MIN                     | TYP              | MAX       | MIN                      | TYP  | MAX |      |
| V <sub>IO</sub>                                   | Input offset voltage                                         | V <sub>O</sub> = 0,<br>V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω                    | TL052I               | 25°C                        | 0.73                    | 3.5              | 0.65      | 1.5                      | mV   |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | 5.3                     | 3.3              |           |                          |      |     |      |
|                                                   |                                                              |                                                                                         | TL052AI              | 25°C                        | 0.51                    | 2.8              | 0.4       | 0.8                      |      |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | 4.6                     | 2.6              |           |                          |      |     |      |
| α <sub>V<sub>IO</sub></sub>                       | Temperature coefficient <sup>‡</sup>                         |                                                                                         | TL052I               | 25°C to 85°C                | 7                       | 6                | μV/°C     |                          |      |     |      |
|                                                   |                                                              |                                                                                         | TL052AI              | 25°C to 85°C                | 6                       | 6                |           | 25                       |      |     |      |
| Input offset-voltage long-term drift <sup>§</sup> |                                                              | V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω                                            | V <sub>IC</sub> = 0, | 25°C                        | 0.04                    | 0.04             | μV/mo     |                          |      |     |      |
| I <sub>IO</sub>                                   | Input offset current                                         | V <sub>O</sub> = 0,<br>See Figure 5                                                     | V <sub>IC</sub> = 0, | 25°C                        | 4                       | 100              | 5         | 100                      | pA   |     |      |
|                                                   |                                                              |                                                                                         |                      | 85°C                        | 0.06                    | 10               | 0.07      | 10                       | nA   |     |      |
| I <sub>IB</sub>                                   | Input bias current                                           | V <sub>O</sub> = 0,<br>See Figure 5                                                     | V <sub>IC</sub> = 0, | 25°C                        | 20                      | 200              | 30        | 200                      | pA   |     |      |
|                                                   |                                                              |                                                                                         |                      | 85°C                        | 0.6                     | 20               | 0.7       | 20                       | nA   |     |      |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                              |                                                                                         |                      | 25°C                        | -1 to 4                 | -2.3 to 5.6      | -11 to 11 | -12.3 to 15.6            | V    |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | -1 to 4                 |                  | -11 to 11 |                          |      |     |      |
| V <sub>OM+</sub>                                  | Maximum positive peak output voltage swing                   | R <sub>L</sub> = 10 kΩ                                                                  |                      | 25°C                        | 3                       | 4.2              | 13        | 13.9                     | V    |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | 3                       | 13               |           |                          |      |     |      |
|                                                   |                                                              | R <sub>L</sub> = 2 kΩ                                                                   |                      | 25°C                        | 2.5                     | 3.8              | 11.5      | 12.7                     |      |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | 2.5                     | 11.5             |           |                          |      |     |      |
| V <sub>OM-</sub>                                  | Maximum negative peak output voltage swing                   | R <sub>L</sub> = 10 kΩ                                                                  |                      | 25°C                        | -2.5                    | -3.5             | -12       | -13.2                    | V    |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | -2.5                    | -12              |           |                          |      |     |      |
|                                                   |                                                              | R <sub>L</sub> = 2 kΩ                                                                   |                      | 25°C                        | -2.3                    | -3.2             | -11       | -12                      |      |     |      |
|                                                   |                                                              |                                                                                         |                      | Full range                  | -2.3                    | -11              |           |                          |      |     |      |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification <sup>¶</sup> | R <sub>L</sub> = 2 kΩ                                                                   |                      | 25°C                        | 25                      | 59               | 50        | 105                      | V/mV |     |      |
|                                                   |                                                              |                                                                                         |                      | -40°C                       | 30                      | 74               | 60        | 145                      |      |     |      |
|                                                   |                                                              |                                                                                         |                      | 85°C                        | 20                      | 43               | 30        | 76                       |      |     |      |
| r <sub>i</sub>                                    | Input resistance                                             |                                                                                         |                      | 25°C                        | 10 <sup>12</sup>        | 10 <sup>12</sup> | Ω         |                          |      |     |      |
| c <sub>i</sub>                                    | Input capacitance                                            |                                                                                         |                      | 25°C                        | 10                      | 12               | pF        |                          |      |     |      |
| CMRR                                              | Common-mode rejection ratio                                  | V <sub>IC</sub> = V <sub>ICRmin</sub> ,<br>V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω |                      | 25°C                        | 65                      | 85               | 75        | 93                       | dB   |     |      |
|                                                   |                                                              |                                                                                         |                      | -40°C                       | 65                      | 83               | 75        | 90                       |      |     |      |
|                                                   |                                                              |                                                                                         |                      | 85°C                        | 65                      | 84               | 75        | 93                       |      |     |      |

† Full range is -40°C to 85°C.

‡ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters

§ Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$ , extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

¶ At  $V_{CC\pm} = \pm 5\text{ V}$ ,  $V_O = \pm 2.3\text{ V}$ ; at  $V_{CC\pm} = \pm 15\text{ V}$ ,  $V_O = \pm 10\text{ V}$ .



# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### TL052I and TL052AI electrical characteristics at specified free-air temperature (continued)

| PARAMETER                        |                                                                       | TEST CONDITIONS       |                       | T <sub>A</sub> | TL052I, TL052AI         |     |     |                          |     |     | UNIT |
|----------------------------------|-----------------------------------------------------------------------|-----------------------|-----------------------|----------------|-------------------------|-----|-----|--------------------------|-----|-----|------|
|                                  |                                                                       |                       |                       |                | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |     |     |      |
|                                  |                                                                       |                       |                       |                | MIN                     | TYP | MAX | MIN                      | TYP | MAX |      |
| k <sub>SVR</sub>                 | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>O</sub> = 0,   | R <sub>S</sub> = 50 Ω | 25°C           | 75                      | 99  |     | 75                       | 99  |     | dB   |
|                                  |                                                                       |                       |                       | –40°C          | 75                      | 98  |     | 75                       | 98  |     |      |
|                                  |                                                                       |                       |                       | 85°C           | 75                      | 99  |     | 75                       | 99  |     |      |
| I <sub>CC</sub>                  | Supply current (two amplifiers)                                       | V <sub>O</sub> = 0,   | No load               | 25°C           |                         | 4.6 | 5.6 |                          | 4.8 | 5.6 | mA   |
|                                  |                                                                       |                       |                       | –40°C          |                         | 4.5 | 6.4 |                          | 4.7 | 6.4 |      |
|                                  |                                                                       |                       |                       | 85°C           |                         | 4.4 | 6.4 |                          | 4.6 | 6.4 |      |
| V <sub>O1</sub> /V <sub>O2</sub> | Crosstalk attenuation                                                 | A <sub>VD</sub> = 100 |                       | 25°C           |                         | 120 |     |                          | 120 |     | dB   |

#### TL052I and TL052AI operating characteristics at specified free-air temperature

| PARAMETER          |                                             | TEST CONDITIONS                                                                                        |                                        | T <sub>A</sub> <sup>†</sup> | TL052I, TL052AI         |     |     |                          |     |      | UNIT   |
|--------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------|-----------------------------|-------------------------|-----|-----|--------------------------|-----|------|--------|
|                    |                                             |                                                                                                        |                                        |                             | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |     |      |        |
|                    |                                             |                                                                                                        |                                        |                             | MIN                     | TYP | MAX | MIN                      | TYP | MAX  |        |
| SR+                | Slew rate at unity gain‡                    | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF,<br>See Figure 1                                        | 25°C                                   | 17.8                        |                         |     | 9   | 20.7                     |     | V/μs |        |
|                    |                                             |                                                                                                        | Full range                             |                             |                         |     | 8   |                          |     |      |        |
| SR–                | Negative slew rate at unity gain‡           |                                                                                                        | 25°C                                   | 15.4                        |                         |     | 9   | 17.8                     |     |      |        |
|                    |                                             |                                                                                                        | Full range                             |                             |                         |     | 8   |                          |     |      |        |
| t <sub>r</sub>     | Rise time                                   | V <sub>I(PP)</sub> = ±10 mV,<br>R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF,<br>See Figures 1 and 2 | 25°C                                   | 55                          |                         |     | 56  |                          |     | ns   |        |
|                    |                                             |                                                                                                        | –40°C                                  | 52                          |                         |     | 53  |                          |     |      |        |
|                    |                                             |                                                                                                        | 85°C                                   | 64                          |                         |     | 65  |                          |     |      |        |
| t <sub>f</sub>     | Fall time                                   |                                                                                                        | 25°C                                   | 55                          |                         |     | 57  |                          |     |      |        |
|                    |                                             |                                                                                                        | –40°C                                  | 51                          |                         |     | 53  |                          |     |      |        |
|                    |                                             |                                                                                                        | 85°C                                   | 64                          |                         |     | 65  |                          |     |      |        |
| Overshoot factor   |                                             |                                                                                                        | 25°C                                   | 24%                         |                         |     | 19% |                          |     | %    |        |
|                    |                                             |                                                                                                        | –40°C                                  | 24%                         |                         |     | 19% |                          |     |      |        |
|                    |                                             |                                                                                                        | 85°C                                   | 24%                         |                         |     | 19  |                          |     |      |        |
| V <sub>n</sub>     | Equivalent input noise voltage§             | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                 | f = 10 Hz                              | 25°C                        | 71                      |     |     | 71                       |     |      | nV/√Hz |
|                    |                                             |                                                                                                        | f = 1 kHz                              | 25°C                        | 19                      |     |     | 19 30                    |     |      |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise current |                                                                                                        | f = 10 Hz to 10 kHz                    | 25°C                        | 4                       |     |     | 4                        |     |      |        |
| I <sub>n</sub>     | Equivalent input noise current              | f = 1 kHz                                                                                              |                                        | 25°C                        | 0.01                    |     |     | 0.01                     |     |      | pA/√Hz |
| THD                | Total harmonic distortion¶                  | R <sub>S</sub> = 1 kΩ,<br>f = 1 kHz                                                                    | R <sub>L</sub> = 2 kΩ,                 | 25°C                        | 0.003                   |     |     | 0.003                    |     |      | %      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,<br>See Figure 4                                     | R <sub>L</sub> = 2 kΩ,<br>See Figure 4 | 25°C                        | 3                       |     |     | 3                        |     |      | MHz    |
|                    |                                             |                                                                                                        |                                        | –40°C                       | 3.5                     |     |     | 3.6                      |     |      |        |
|                    |                                             |                                                                                                        |                                        | 85°C                        | 2.5                     |     |     | 2.6                      |     |      |        |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,<br>See Figure 4                                     | R <sub>L</sub> = 2 kΩ,<br>See Figure 4 | 25°C                        | 60                      |     |     | 63                       |     |      | deg    |
|                    |                                             |                                                                                                        |                                        | –40°C                       | 58                      |     |     | 61                       |     |      |        |
|                    |                                             |                                                                                                        |                                        | 85°C                        | 60                      |     |     | 63                       |     |      |        |

<sup>†</sup> Full range is –40°C to 85°C.

<sup>‡</sup> For V<sub>CC±</sub> = ±5 V, V<sub>I(PP)</sub> = ±1 V; for V<sub>CC±</sub> = ±15 V, V<sub>I(PP)</sub> = ±5 V.

<sup>§</sup> This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>¶</sup> For V<sub>CC±</sub> = ±5 V, V<sub>O(RMS)</sub> = 1 V; for V<sub>CC±</sub> = ±15 V, V<sub>O(RMS)</sub> = 6 V.



**TL05x, TL05xA**  
**ENHANCED-JFET LOW-OFFSET**  
**OPERATIONAL AMPLIFIERS**

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

**TL054C and TL054AC electrical characteristics at specified free-air temperature**

| PARAMETER                             |                                                                       | TEST CONDITIONS                                                                      |                                                          | T <sub>A</sub> <sup>†</sup> | TL054C, TL054AC         |                            |         |                          |       |     | UNIT |
|---------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------------|-------------------------|----------------------------|---------|--------------------------|-------|-----|------|
|                                       |                                                                       |                                                                                      |                                                          |                             | V <sub>CC±</sub> = ±5 V |                            |         | V <sub>CC±</sub> = ±15 V |       |     |      |
|                                       |                                                                       |                                                                                      |                                                          |                             | MIN                     | TYP                        | MAX     | MIN                      | TYP   | MAX |      |
| V <sub>IO</sub>                       | Input offset voltage                                                  | V <sub>O</sub> = 0,<br>V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω                 | TL054C                                                   | 25°C                        | 0.64 5.5                |                            | 0.56 4  |                          | mV    |     |      |
|                                       |                                                                       |                                                                                      |                                                          | Full range                  | 7.7                     |                            | 6.2     |                          |       |     |      |
|                                       |                                                                       |                                                                                      | TL054AC                                                  | 25°C                        | 0.57 3.5                |                            | 0.5 1.5 |                          |       |     |      |
|                                       |                                                                       |                                                                                      |                                                          | Full range                  | 5.7                     |                            | 3.7     |                          |       |     |      |
| α <sub>V<sub>IO</sub></sub>           | Temperature coefficient of input offset voltage                       |                                                                                      | TL054C                                                   | 25°C to 70°C                | 25                      |                            | 23      |                          | μV/°C |     |      |
|                                       |                                                                       |                                                                                      | TL054AC                                                  | 25°C to 70°C                | 24                      |                            | 23      |                          |       |     |      |
| Input offset-voltage long-term drift‡ |                                                                       |                                                                                      |                                                          | 25°C                        | 0.04                    |                            | 0.04    |                          | μV/mo |     |      |
| I <sub>IO</sub>                       | Input offset current                                                  |                                                                                      | V <sub>O</sub> = 0, V <sub>IC</sub> = 0,<br>See Figure 5 | 25°C                        | 4 100                   |                            | 5 100   |                          | pA    |     |      |
|                                       |                                                                       | 70°C                                                                                 |                                                          | 0.02 1                      |                         | 0.025 1                    |         | nA                       |       |     |      |
| I <sub>IB</sub>                       | Input bias current                                                    | V <sub>O</sub> = 0, V <sub>IC</sub> = 0,<br>See Figure 5                             | 25°C                                                     | 20 200                      |                         | 30 200                     |         | pA                       |       |     |      |
|                                       |                                                                       |                                                                                      | 70°C                                                     | 0.15 4                      |                         | 0.2 4                      |         | nA                       |       |     |      |
| V <sub>ICR</sub>                      | Common-mode input voltage range                                       |                                                                                      | 25°C                                                     | –1 to 4<br>–2.3 to 5.6      |                         | –11 to 11<br>–12.3 to 15.6 |         | V                        |       |     |      |
|                                       |                                                                       | Full range                                                                           | –1 to 4                                                  |                             | –11 to 11               |                            |         |                          |       |     |      |
| V <sub>OM+</sub>                      | Maximum positive peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                               | 25°C                                                     | 3 4.2                       |                         | 13 13.9                    |         | V                        |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | 3                           |                         | 13                         |         |                          |       |     |      |
|                                       |                                                                       | R <sub>L</sub> = 2 kΩ                                                                | 25°C                                                     | 2.5 3.8                     |                         | 11.5 12.7                  |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | 2.5                         |                         | 11.5                       |         |                          |       |     |      |
| V <sub>OM–</sub>                      | Maximum negative peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                               | 25°C                                                     | –2.5 –3.5                   |                         | –12 –13.2                  |         | V                        |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | –2.5                        |                         | –12                        |         |                          |       |     |      |
|                                       |                                                                       | R <sub>L</sub> = 2 kΩ                                                                | 25°C                                                     | –2.3 –3.2                   |                         | –11 –12                    |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | –2.3                        |                         | –11                        |         |                          |       |     |      |
| A <sub>VD</sub>                       | Large-signal differential voltage amplification§                      | R <sub>L</sub> = 2 kΩ                                                                | 25°C                                                     | 25 72                       |                         | 50 133                     |         | V/mV                     |       |     |      |
|                                       |                                                                       |                                                                                      | 0°C                                                      | 30 88                       |                         | 60 173                     |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 70°C                                                     | 20 57                       |                         | 30 85                      |         |                          |       |     |      |
| r <sub>i</sub>                        | Input resistance                                                      |                                                                                      | 25°C                                                     | 10 <sup>12</sup>            |                         | 10 <sup>12</sup>           |         | Ω                        |       |     |      |
| c <sub>i</sub>                        | Input capacitance                                                     |                                                                                      | 25°C                                                     | 10                          |                         | 12                         |         | pF                       |       |     |      |
| CMRR                                  | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICRmin</sub> ,<br>V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω | 25°C                                                     | 65 84                       |                         | 75 92                      |         | dB                       |       |     |      |
|                                       |                                                                       |                                                                                      | 0°C                                                      | 65 84                       |                         | 75 92                      |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 70°C                                                     | 65 84                       |                         | 75 93                      |         |                          |       |     |      |
| k <sub>SVR</sub>                      | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V,<br>V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω       | 25°C                                                     | 75 99                       |                         | 75 99                      |         | dB                       |       |     |      |
|                                       |                                                                       |                                                                                      | 0°C                                                      | 75 99                       |                         | 75 99                      |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 70°C                                                     | 75 99                       |                         | 75 99                      |         |                          |       |     |      |
| I <sub>CC</sub>                       | Supply current (four amplifiers)                                      | V <sub>O</sub> = 0, No load                                                          | 25°C                                                     | 8.1 11.2                    |                         | 8.4 11.2                   |         | mA                       |       |     |      |
|                                       |                                                                       |                                                                                      | 0°C                                                      | 8.2 12.8                    |                         | 8.5 12.8                   |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 70°C                                                     | 7.9 11.2                    |                         | 8.2 11.2                   |         |                          |       |     |      |
| V <sub>O1</sub> /V <sub>O2</sub>      | Crosstalk attenuation                                                 | A <sub>VD</sub> = 100                                                                | 25°C                                                     | 120                         |                         | 120                        |         | dB                       |       |     |      |

<sup>†</sup> Full range is 0°C to 70°C.

<sup>‡</sup> Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T<sub>A</sub> = 150°C, extrapolated to T<sub>A</sub> = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

<sup>§</sup> For V<sub>CC±</sub> = ±5 V, V<sub>O</sub> = ±2.3 V, at V<sub>CC±</sub> = ±15 V, V<sub>O</sub> = ±10 V.B



# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### TL054C and TL054AC operating characteristics at specified free-air temperature

| PARAMETER          |                                             | TEST CONDITIONS                                                                                  |                                     | T <sub>A</sub> <sup>†</sup> | TL054C, TL054C          |     |     |                          |      |        | UNIT |
|--------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|-------------------------|-----|-----|--------------------------|------|--------|------|
|                    |                                             |                                                                                                  |                                     |                             | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |      |        |      |
|                    |                                             |                                                                                                  |                                     |                             | MIN                     | TYP | MAX | MIN                      | TYP  | MAX    |      |
| SR+                | Positive slew rate at unity gain            | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figure 1 and Note 7                          |                                     | 25°C                        | 15.4                    |     |     | 10                       | 17.8 |        | V/μs |
|                    | 0°C                                         |                                                                                                  |                                     | 15.7                        |                         |     | 8   | 17.9                     |      |        |      |
|                    | 70°C                                        |                                                                                                  |                                     | 14.4                        |                         |     | 8   | 17.5                     |      |        |      |
| SR–                | Negative slew rate at unity gain‡           |                                                                                                  |                                     | 25°C                        | 13.9                    |     |     | 10                       | 15.9 |        |      |
|                    | 0°C                                         |                                                                                                  |                                     | 14.3                        |                         |     | 8   | 16.1                     |      |        |      |
|                    | 70°C                                        |                                                                                                  |                                     | 13.3                        |                         |     | 8   | 15.5                     |      |        |      |
| t <sub>r</sub>     | Rise time                                   | V <sub>I(PP)</sub> = ±10 mV, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figures 1 and 2 |                                     | 25°C                        | 55                      |     |     | 56                       |      | ns     |      |
|                    | 0°C                                         |                                                                                                  |                                     | 54                          |                         |     | 55  |                          |      |        |      |
|                    | 70°C                                        |                                                                                                  |                                     | 63                          |                         |     | 63  |                          |      |        |      |
| t <sub>f</sub>     | Fall time                                   |                                                                                                  |                                     | 25°C                        | 55                      |     |     | 57                       |      |        |      |
|                    | 0°C                                         |                                                                                                  |                                     | 54                          |                         |     | 56  |                          |      |        |      |
|                    | 70°C                                        |                                                                                                  |                                     | 62                          |                         |     | 64  |                          |      |        |      |
| Overshoot factor   |                                             |                                                                                                  |                                     | 25°C                        | 24%                     |     |     | 19%                      |      | %      |      |
|                    |                                             |                                                                                                  |                                     | 0°C                         | 24%                     |     |     | 19%                      |      |        |      |
|                    |                                             | 70°C                                                                                             | 24%                                 |                             |                         | 19  |     |                          |      |        |      |
| V <sub>n</sub>     | Equivalent input noise voltage§             | R <sub>S</sub> = 20 Ω, See Figure 3                                                              | f = 10 Hz                           | 25°C                        | 75                      |     |     | 75                       |      | nV/√Hz |      |
|                    |                                             |                                                                                                  | f = 1 kHz                           | 25°C                        | 21                      |     |     | 21 45                    |      |        |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                  |                                     | f = 10 Hz to 10 kHz         | 25°C                    | 4   |     |                          | 4    |        | μV   |
| I <sub>n</sub>     | Equivalent input noise current              | f = 1 kHz                                                                                        |                                     | 25°C                        | 0.01                    |     |     | 0.01                     |      | pA/√Hz |      |
| THD                | Total harmonic distortion¶                  | R <sub>S</sub> = 1 kΩ, f = 1 kHz                                                                 | R <sub>L</sub> = 2 kΩ,              | 25°C                        | 0.003                   |     |     | 0.003                    |      | %      |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                  | R <sub>L</sub> = 2 kΩ, See Figure 4 | 25°C                        | 2.7                     |     |     | 2.7                      |      | MHz    |      |
|                    |                                             |                                                                                                  |                                     | 0°C                         | 3                       |     |     | 3                        |      |        |      |
|                    |                                             |                                                                                                  |                                     | 70°C                        | 2.4                     |     |     | 2.4                      |      |        |      |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                  | R <sub>L</sub> = 2 kΩ, See Figure 4 | 25°C                        | 61                      |     |     | 64                       |      | deg    |      |
|                    |                                             |                                                                                                  |                                     | 0°C                         | 60                      |     |     | 64                       |      |        |      |
|                    |                                             |                                                                                                  |                                     | 70°C                        | 61                      |     |     | 63                       |      |        |      |

$^\dagger$  Full range is 0°C to 70°C.

$^\ddagger$  For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_{I(PP)} = \pm 1 \text{ V}$ ; for  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_{I(PP)} = \pm 5 \text{ V}$ .

$^\S$  This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

$^\P$  For  $V_{CC\pm} = \pm 5 \text{ V}$ ,  $V_{O(RMS)} = 1 \text{ V}$ ; for  $V_{CC\pm} = \pm 15 \text{ V}$ ,  $V_{O(RMS)} = 6 \text{ V}$ .

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TL054I and TL054AI electrical characteristics at specified free-air temperature

| PARAMETER                             |                                                                       | TEST CONDITIONS                                                                      |                                                          | T <sub>A</sub> <sup>†</sup> | TL054I, TL054AI         |                            |         |                          |       |     | UNIT |
|---------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------------|-------------------------|----------------------------|---------|--------------------------|-------|-----|------|
|                                       |                                                                       |                                                                                      |                                                          |                             | V <sub>CC±</sub> = ±5 V |                            |         | V <sub>CC±</sub> = ±15 V |       |     |      |
|                                       |                                                                       |                                                                                      |                                                          |                             | MIN                     | TYP                        | MAX     | MIN                      | TYP   | MAX |      |
| V <sub>IO</sub>                       | Input offset voltage                                                  | V <sub>O</sub> = 0,<br>V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω                 | TL054I                                                   | 25°C                        | 0.64 5.5                |                            | 0.56 4  |                          | mV    |     |      |
|                                       |                                                                       |                                                                                      |                                                          | Full range                  | 8.8                     |                            | 7.3     |                          |       |     |      |
|                                       |                                                                       |                                                                                      | TL054AI                                                  | 25°C                        | 0.57 3.5                |                            | 0.5 1.5 |                          |       |     |      |
|                                       |                                                                       |                                                                                      |                                                          | Full range                  | 6.8                     |                            | 4.8     |                          |       |     |      |
| α <sub>V<sub>IO</sub></sub>           | Temperature coefficient of input offset voltage                       |                                                                                      | TL054I                                                   | 25°C to 85°C                | 25                      |                            | 24      |                          | μV/°C |     |      |
|                                       |                                                                       |                                                                                      | TL054AI                                                  | 25°C to 85°C                | 25                      |                            | 23      |                          |       |     |      |
| Input offset voltage long-term drift‡ |                                                                       |                                                                                      |                                                          | 25°C                        | 0.04                    |                            | 0.04    |                          | μV/mo |     |      |
| I <sub>IO</sub>                       | Input offset current                                                  |                                                                                      | V <sub>O</sub> = 0, V <sub>IC</sub> = 0,<br>See Figure 5 | 25°C                        | 4 100                   |                            | 5 100   |                          | pA    |     |      |
|                                       |                                                                       | 85°C                                                                                 |                                                          | 0.06 10                     |                         | 0.07 10                    |         | nA                       |       |     |      |
| I <sub>IB</sub>                       | Input bias current                                                    | V <sub>O</sub> = 0, V <sub>IC</sub> = 0,<br>See Figure 5                             | 25°C                                                     | 20 200                      |                         | 30 200                     |         | pA                       |       |     |      |
|                                       |                                                                       |                                                                                      | 85°C                                                     | 0.6 20                      |                         | 0.7 20                     |         | nA                       |       |     |      |
| V <sub>ICR</sub>                      | Common-mode input voltage range                                       |                                                                                      | 25°C                                                     | –1 to 4<br>–2.3 to 5.6      |                         | –11 to 11<br>–12.3 to 15.6 |         | V                        |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | –1 to 4                     |                         | –11 to 11                  |         |                          |       |     |      |
| V <sub>OM+</sub>                      | Maximum positive peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                               | 25°C                                                     | 3 4.2                       |                         | 13 13.9                    |         | V                        |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | 3                           |                         | 13                         |         |                          |       |     |      |
|                                       |                                                                       | R <sub>L</sub> = 2 kΩ                                                                | 25°C                                                     | 2.5 3.8                     |                         | 11.5 12.7                  |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | 2.5                         |                         | 11.5                       |         |                          |       |     |      |
| V <sub>OM–</sub>                      | Maximum negative peak output voltage swing                            | R <sub>L</sub> = 10 kΩ                                                               | 25°C                                                     | –2.5 –3.5                   |                         | –12 –13.2                  |         | V                        |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | –2.5                        |                         | –12                        |         |                          |       |     |      |
|                                       |                                                                       | R <sub>L</sub> = 2 kΩ                                                                | 25°C                                                     | –2.3 –3.2                   |                         | –11 –12                    |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | Full range                                               | –2.3                        |                         | –11                        |         |                          |       |     |      |
| A <sub>VD</sub>                       | Large-signal differential voltage amplification§                      | R <sub>L</sub> = 2 kΩ                                                                | 25°C                                                     | 25 72                       |                         | 50 133                     |         | V/mV                     |       |     |      |
|                                       |                                                                       |                                                                                      | –40°C                                                    | 30 101                      |                         | 60 212                     |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 85°C                                                     | 20 50                       |                         | 30 70                      |         |                          |       |     |      |
| r <sub>i</sub>                        | Input resistance                                                      |                                                                                      | 25°C                                                     | 10 <sup>12</sup>            |                         | 10 <sup>12</sup>           |         | Ω                        |       |     |      |
| c <sub>i</sub>                        | Input capacitance                                                     |                                                                                      | 25°C                                                     | 10                          |                         | 12                         |         | pF                       |       |     |      |
| CMRR                                  | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICRmin</sub> ,<br>V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω | 25°C                                                     | 65 84                       |                         | 75 92                      |         | dB                       |       |     |      |
|                                       |                                                                       |                                                                                      | –40°C                                                    | 65 83                       |                         | 75 92                      |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 85°C                                                     | 65 84                       |                         | 75 93                      |         |                          |       |     |      |
| k <sub>SVR</sub>                      | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V,<br>V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω       | 25°C                                                     | 75 99                       |                         | 75 99                      |         | dB                       |       |     |      |
|                                       |                                                                       |                                                                                      | –40°C                                                    | 75 98                       |                         | 75 99                      |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 85°C                                                     | 75 99                       |                         | 75 99                      |         |                          |       |     |      |
| I <sub>CC</sub>                       | Supply current (four amplifiers)                                      | V <sub>O</sub> = 0, No load                                                          | 25°C                                                     | 8.1 11.2                    |                         | 8.4 11.2                   |         | mA                       |       |     |      |
|                                       |                                                                       |                                                                                      | –40°C                                                    | 7.9 12.8                    |                         | 8.2 12.8                   |         |                          |       |     |      |
|                                       |                                                                       |                                                                                      | 85°C                                                     | 7.6 11.2                    |                         | 7.9 11.2                   |         |                          |       |     |      |
| V <sub>O1</sub> /V <sub>O2</sub>      | Crosstalk attenuation                                                 | A <sub>VD</sub> = 100                                                                | 25°C                                                     | 120                         |                         | 120                        |         | dB                       |       |     |      |

<sup>†</sup> Full range is –40°C to 85°C.

<sup>‡</sup> Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T<sub>A</sub> = 150°C, extrapolated to T<sub>A</sub> = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

<sup>§</sup> For V<sub>CC±</sub> = ±5 V, V<sub>O</sub> = ±2.3 V, at V<sub>CC±</sub> = ±15 V, V<sub>O</sub> = ±10 V.



# TL05x, TL05xA

## ENHANCED-JFET LOW-OFFSET

### OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

#### TL054I and TL054AI operating characteristics at specified free-air temperature

| PARAMETER          |                                             | TEST CONDITIONS                                                                                  |                                     | T <sub>A</sub> <sup>†</sup> | TL054I, TL054AI         |     |     |                          |      |        | UNIT |
|--------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|-------------------------|-----|-----|--------------------------|------|--------|------|
|                    |                                             |                                                                                                  |                                     |                             | V <sub>CC±</sub> = ±5 V |     |     | V <sub>CC±</sub> = ±15 V |      |        |      |
|                    |                                             |                                                                                                  |                                     |                             | MIN                     | TYP | MAX | MIN                      | TYP  | MAX    |      |
| SR+                | Positive slew rate at unity gain            | R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figure 1                                     |                                     | 25°C                        | 15.4                    |     |     | 10                       | 17.8 |        | V/μs |
|                    | –40°C                                       |                                                                                                  |                                     | 16.4                        |                         |     | 8   | 18                       |      |        |      |
|                    | 85°C                                        |                                                                                                  |                                     | 14                          |                         |     | 8   | 17.3                     |      |        |      |
| SR–                | Negative slew rate at unity gain‡           |                                                                                                  |                                     | 25°C                        | 13.9                    |     |     | 10                       | 15.9 |        |      |
|                    | –40°C                                       |                                                                                                  |                                     | 14.7                        |                         |     | 8   | 16.1                     |      |        |      |
|                    | 85°C                                        |                                                                                                  |                                     | 13                          |                         |     | 8   | 15.3                     |      |        |      |
| t <sub>r</sub>     | Rise time                                   | V <sub>I(PP)</sub> = ±10 mV, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figures 1 and 2 |                                     | 25°C                        | 55                      |     |     | 56                       |      | ns     |      |
|                    | –40°C                                       |                                                                                                  |                                     | 52                          |                         |     | 53  |                          |      |        |      |
|                    | 85°C                                        |                                                                                                  |                                     | 64                          |                         |     | 65  |                          |      |        |      |
| t <sub>f</sub>     | Fall time                                   |                                                                                                  |                                     | 25°C                        | 55                      |     |     | 57                       |      |        |      |
|                    | –40°C                                       |                                                                                                  |                                     | 51                          |                         |     | 53  |                          |      |        |      |
|                    | 85°C                                        |                                                                                                  |                                     | 64                          |                         |     | 65  |                          |      |        |      |
| Overshoot factor   |                                             |                                                                                                  |                                     | 25°C                        | 24                      |     |     | 19                       |      | %      |      |
|                    |                                             |                                                                                                  |                                     | –40°C                       | 24                      |     |     | 19                       |      |        |      |
|                    |                                             | 85°C                                                                                             | 24                                  |                             |                         | 19  |     |                          |      |        |      |
| V <sub>n</sub>     | Equivalent input noise voltage§             | R <sub>S</sub> = 20 Ω, See Figure 3                                                              | f = 10 Hz                           | 25°C                        | 75                      |     |     | 75                       |      | nV/√Hz |      |
|                    |                                             |                                                                                                  | f = 1 kHz                           | 25°C                        | 21                      |     |     | 45                       |      |        |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                  |                                     | f = 10 Hz to 10 kHz         | 25°C                    | 4   |     |                          | 4    |        | μV   |
| I <sub>n</sub>     | Equivalent input noise current              | f = 1 kHz                                                                                        |                                     | 25°C                        | 0.01                    |     |     | 0.01                     |      | pA/√Hz |      |
| THD                | Total harmonic distortion¶                  | R <sub>S</sub> = 1 kΩ, f = 1 kHz                                                                 | R <sub>L</sub> = 2 kΩ,              | 25°C                        | 0.003%                  |     |     | 0.003%                   |      | %      |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                  | R <sub>L</sub> = 2 kΩ, See Figure 4 | 25°C                        | 2.7                     |     |     | 2.7                      |      | MHz    |      |
|                    |                                             |                                                                                                  |                                     | –40°C                       | 3.3                     |     |     | 3.3                      |      |        |      |
|                    |                                             |                                                                                                  |                                     | 85°C                        | 2.3                     |     |     | 2.4                      |      |        |      |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                  | R <sub>L</sub> = 2 kΩ, See Figure 4 | 25°C                        | 61                      |     |     | 64                       |      | deg    |      |
|                    |                                             |                                                                                                  |                                     | –40°C                       | 59                      |     |     | 62                       |      |        |      |
|                    |                                             |                                                                                                  |                                     | 85°C                        | 61                      |     |     | 64                       |      |        |      |

<sup>†</sup> Full range is –40°C to 85°C.

<sup>‡</sup> For  $V_{CC\pm} = \pm 5\text{ V}$ ,  $V_{I(PP)} = \pm 1\text{ V}$ ; for  $V_{CC\pm} = \pm 15\text{ V}$ ,  $V_{I(PP)} = \pm 5\text{ V}$ .

<sup>§</sup> This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

<sup>¶</sup> For  $V_{CC\pm} = \pm 5\text{ V}$ ,  $V_{O(RMS)} = 1\text{ V}$ ; for  $V_{CC\pm} = \pm 15\text{ V}$ ,  $V_{O(RMS)} = 6\text{ V}$ .

## PARAMETER MEASUREMENT INFORMATION



NOTE A:  $C_L$  includes fixture capacitance.

**Figure 1. Slew Rate, Rise/Fall Time, and Overshoot Test Circuit**



**Figure 2. Rise-Time and Overshoot Waveform**



**Figure 3. Noise-Voltage Test Circuit**



NOTE A:  $C_L$  includes fixture capacitance.

**Figure 4. Unity-Gain Bandwidth and Phase-Margin Test Circuit**

### typical values


Typical values, as presented in this data sheet represent the median (50% point) of device parametric performance.

### input bias and offset current

At the picoamp-bias-current level typical of the TL05x and TL05xA, accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test-socket leakages easily can exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied, but with no device in the socket. The device then is inserted in the socket, and a second test that measures both the socket leakage and the device input bias current is performed. The two measurements then are subtracted algebraically to determine the bias current of the device.

### noise

Because of the increasing emphasis on low noise levels in many of today's applications, the input noise voltage density is sample tested at  $f = 1$  kHz. Texas Instruments also has additional noise-testing capability to meet specific application requirements. Please contact the factory for details.

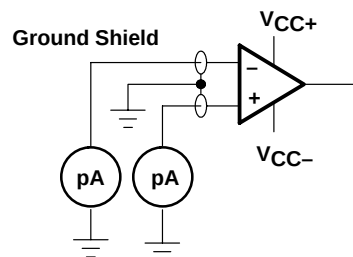

**Figure 5. Input-Bias and Offset-Current Test Circuit**

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS

Table of Graphs

|                   |                                                 |                                                                     | FIGURE                                 |
|-------------------|-------------------------------------------------|---------------------------------------------------------------------|----------------------------------------|
| $V_{IO}$          | Input offset voltage                            | Distribution                                                        | 6–11                                   |
| $\alpha_{V_{IO}}$ | Temperature coefficient of input offset voltage | Distribution                                                        | 12, 13, 14                             |
| $I_{IB}$          | Input bias current                              | vs Common-mode input voltage<br>vs Free-air temperature             | 15<br>16                               |
| $I_{IO}$          | Input offset current                            | vs Free-air temperature                                             | 16                                     |
| $V_{IC}$          | Common-mode input voltage range limits          | vs Supply voltage<br>vs Free-air temperature                        | 17<br>18                               |
| $V_O$             | Output voltage                                  | vs Differential input voltage                                       | 19, 20                                 |
| $V_{OM}$          | Maximum peak output voltage                     | vs Supply voltage<br>vs Output current<br>vs Free-air temperature   | 21<br>25, 26<br>27, 28                 |
| $V_{O(PP)}$       | Maximum peak-to-peak output voltage             | vs Frequency                                                        | 22, 23, 24                             |
| $A_{VD}$          | Large-signal differential voltage amplification | vs Load resistance<br>vs Frequency<br>vs Free-air temperature       | 29<br>30<br>31, 32, 33                 |
| CMRR              | Common-mode rejection ratio                     | vs Frequency<br>vs Free-air temperature                             | 34, 35<br>36                           |
| $z_o$             | Output impedance                                | vs Frequency                                                        | 37                                     |
| $k_{SVR}$         | Supply-voltage rejection ratio                  | vs Free-air temperature                                             | 38                                     |
| $I_{OS}$          | Short-circuit output current                    | vs Supply voltage<br>vs Time<br>vs Free-air temperature             | 39<br>40<br>41                         |
| $I_{CC}$          | Supply current                                  | vs Supply voltage<br>vs Free-air temperature                        | 42, 43, 44<br>45, 46, 47               |
| SR                | Slew rate                                       | vs Load resistance<br>vs Free-air temperature                       | 48–53<br>54–59                         |
|                   | Overshoot factor                                | vs Load capacitance                                                 | 60                                     |
| $V_n$             | Equivalent input noise voltage                  | vs Frequency                                                        | 61, 62                                 |
| THD               | Total harmonic distortion                       | vs Frequency                                                        | 63                                     |
| $B_1$             | Unity-gain bandwidth                            | vs Supply voltage<br>vs Free-air temperature                        | 64, 65, 66<br>67, 68, 69               |
| $\phi_m$          | Phase margin                                    | vs Supply voltage<br>vs Load capacitance<br>vs Free-air temperature | 70, 71, 72<br>73, 74, 75<br>76, 77, 78 |
|                   | Phase shift                                     | vs Frequency                                                        | 30                                     |
|                   | Voltage-follower small-signal pulse response    | vs Time                                                             | 79                                     |
|                   | Voltage-follower large-signal pulse response    | vs Time                                                             | 80                                     |

**TYPICAL CHARACTERISTICS**

**DISTRIBUTION OF TL051  
 INPUT OFFSET VOLTAGE**



**Figure 6**

**DISTRIBUTION OF TL051A  
 INPUT OFFSET VOLTAGE**



**Figure 7**

**DISTRIBUTION OF TL052  
 INPUT OFFSET VOLTAGE**



**Figure 8**

**DISTRIBUTION OF TL052A  
 INPUT OFFSET VOLTAGE**



**Figure 9**

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TL054  
INPUT OFFSET VOLTAGE**



**Figure 10**

**DISTRIBUTION OF TL054A  
INPUT OFFSET VOLTAGE**



**Figure 11**

**DISTRIBUTION OF TL051  
INPUT OFFSET VOLTAGE  
TEMPERATURE COEFFICIENT**






**Figure 12**

**DISTRIBUTION OF TL052  
INPUT OFFSET VOLTAGE  
TEMPERATURE COEFFICIENT**



**Figure 13**

## TYPICAL CHARACTERISTICS

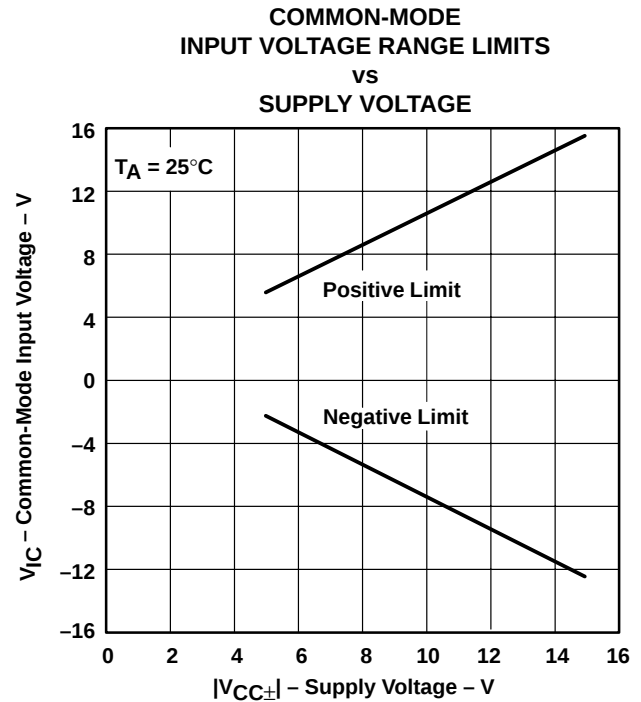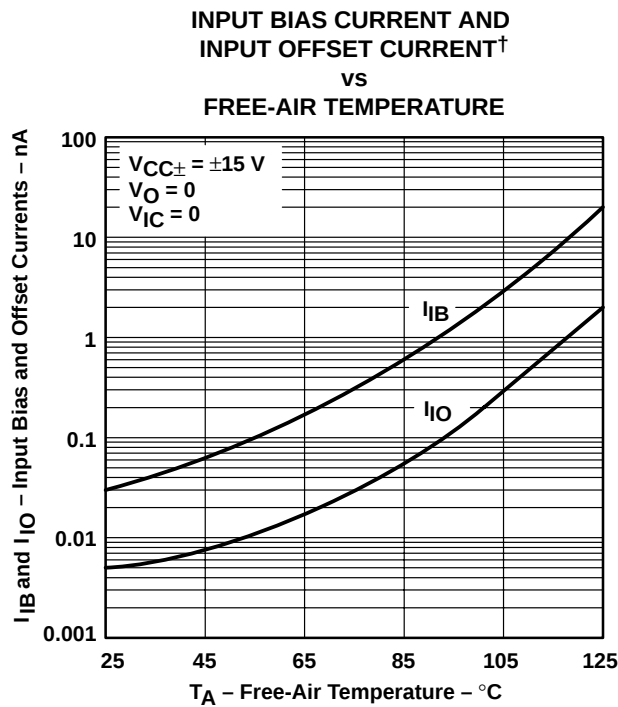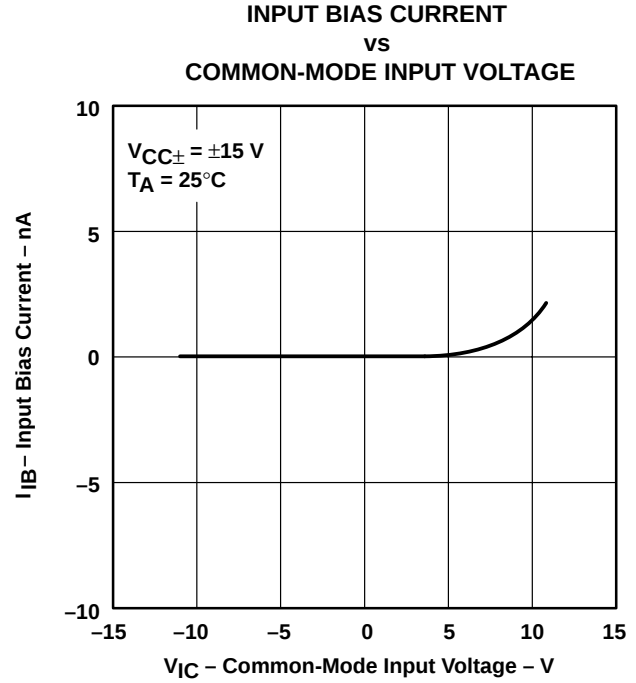

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS



Figure 18



Figure 19



Figure 20



Figure 21

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS



Figure 22

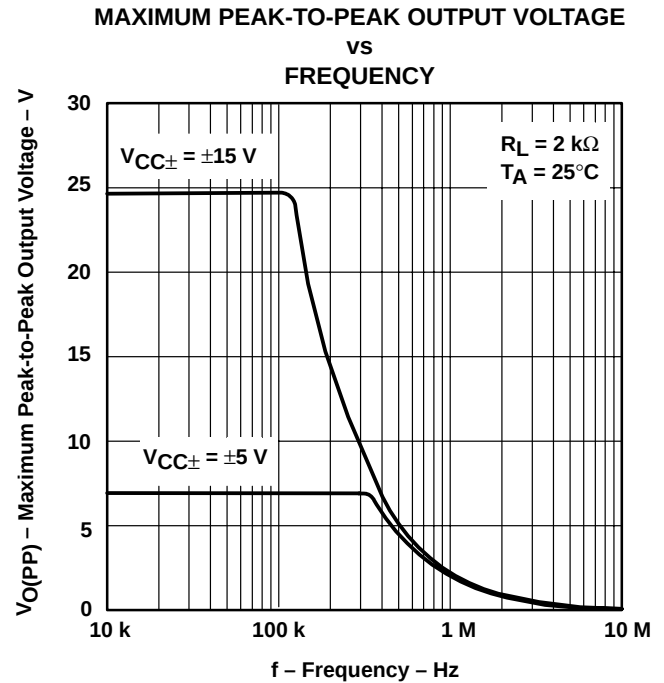


Figure 23



Figure 24



Figure 25

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS



Figure 26



Figure 27



Figure 28



Figure 29

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS**  
**LARGE-SIGNAL DIFFERENTIAL VOLTAGE**  
**AMPLIFICATION AND PHASE SHIFT**  
**VS**  
**FREQUENCY**

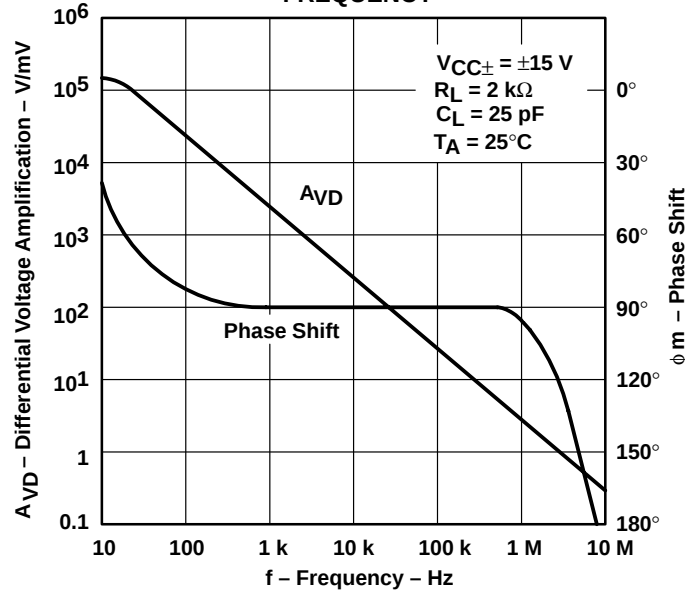


Figure 30

**TL051 AND TL052**  
**LARGE-SIGNAL DIFFERENTIAL**  
**VOLTAGE AMPLIFICATION†**  
**VS**  
**FREE-AIR TEMPERATURE**

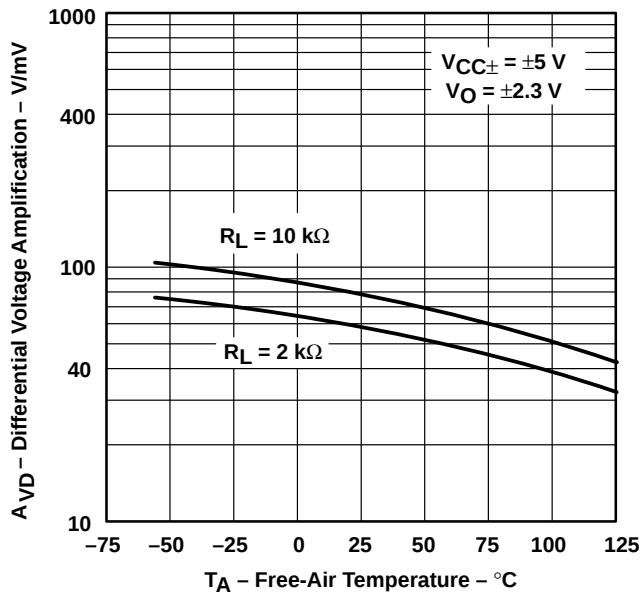


Figure 31

**TL054**  
**LARGE-SIGNAL DIFFERENTIAL**  
**VOLTAGE AMPLIFICATION†**  
**VS**  
**FREE-AIR TEMPERATURE**

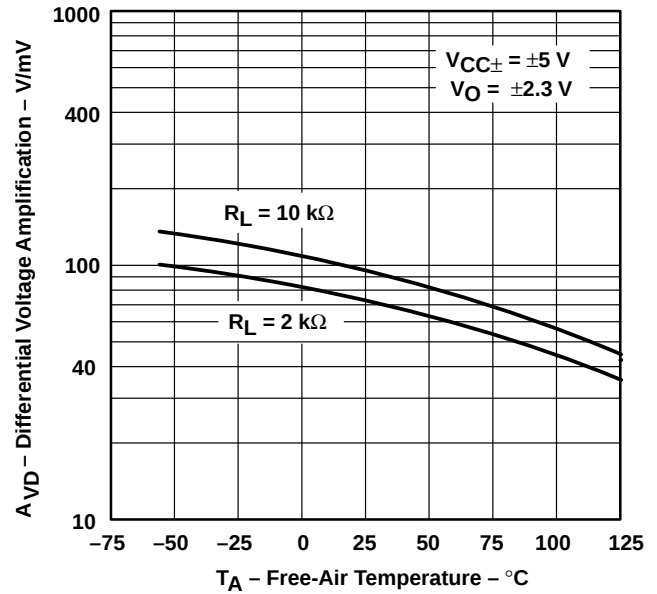


Figure 32

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS



Figure 33



Figure 34

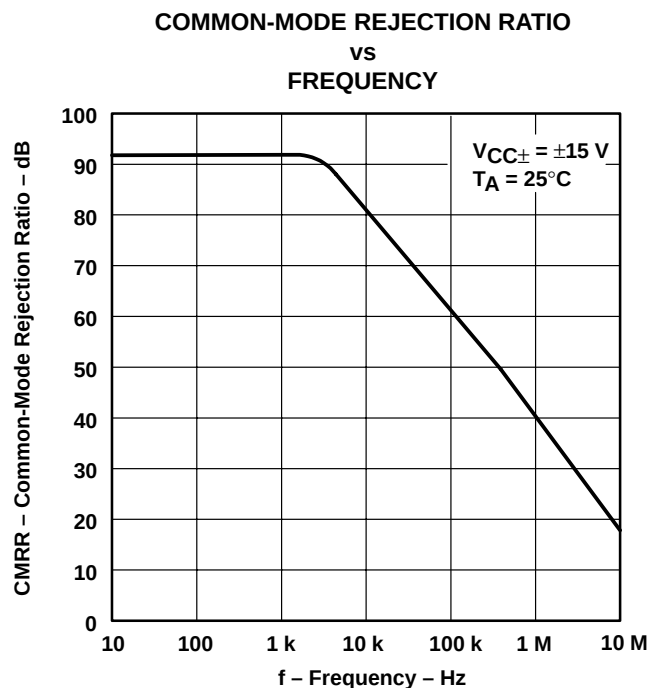


Figure 35



Figure 36

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

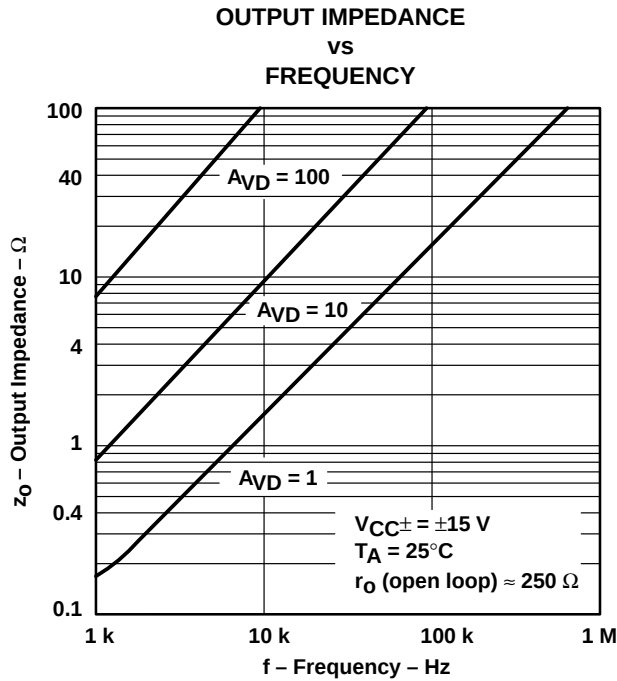


Figure 37



Figure 38

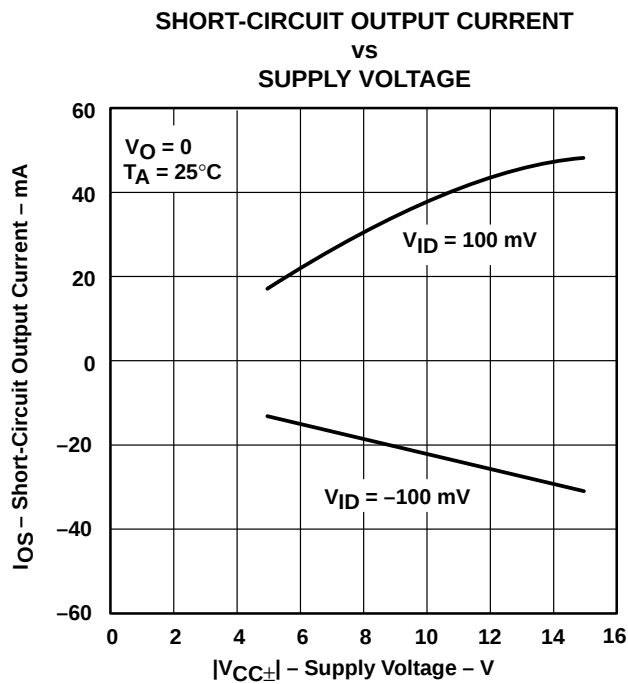


Figure 39

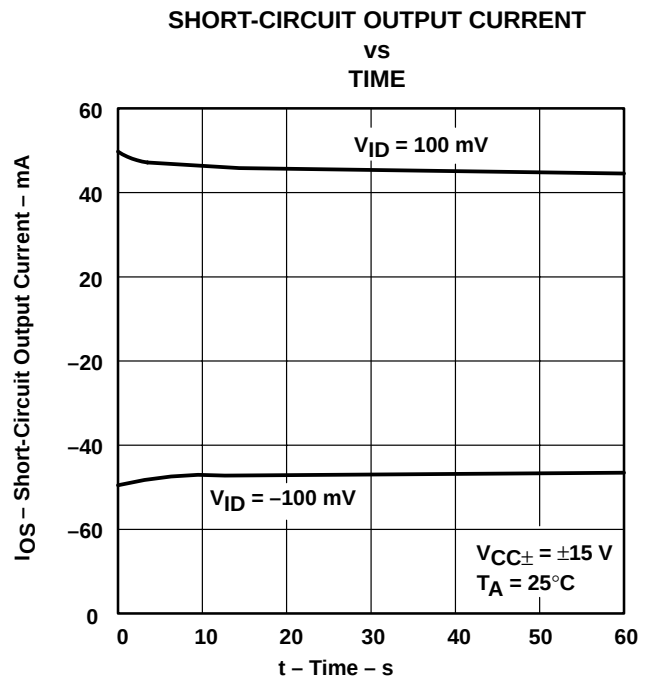


Figure 40

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS



Figure 41



Figure 42




Figure 43




Figure 44

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.


**TYPICAL CHARACTERISTICS**

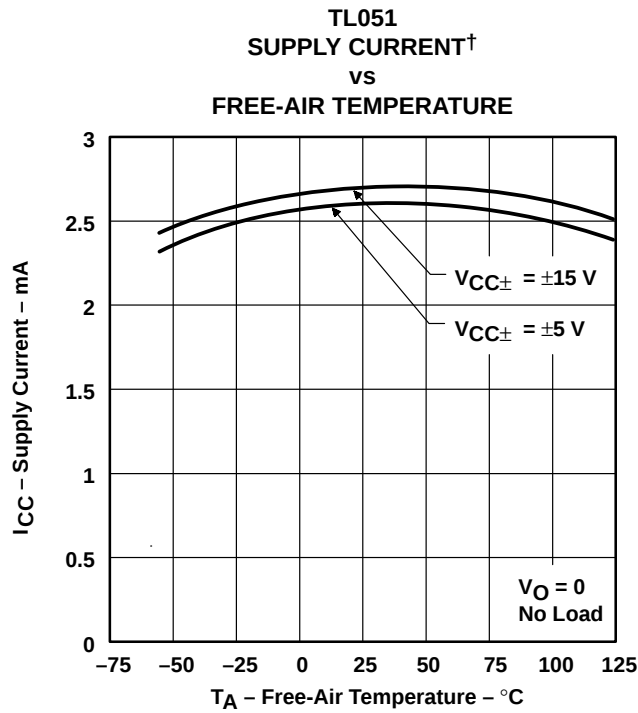


**Figure 45**

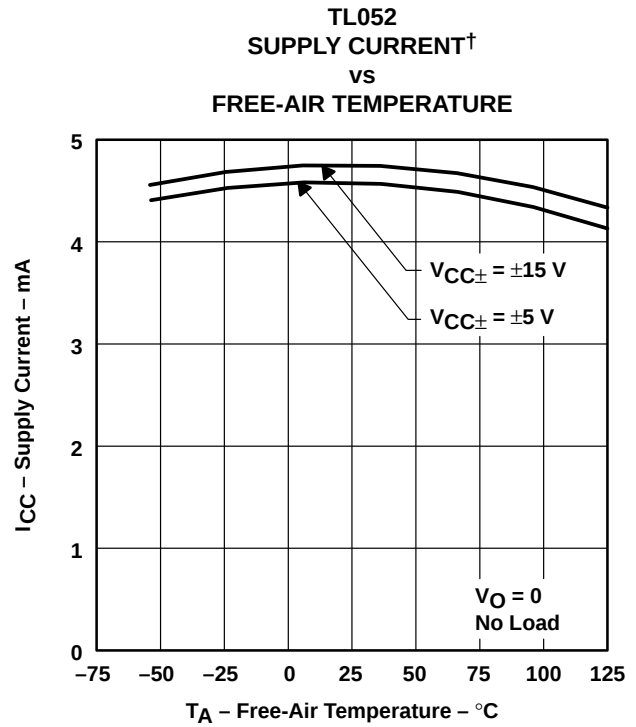

**Figure 46**

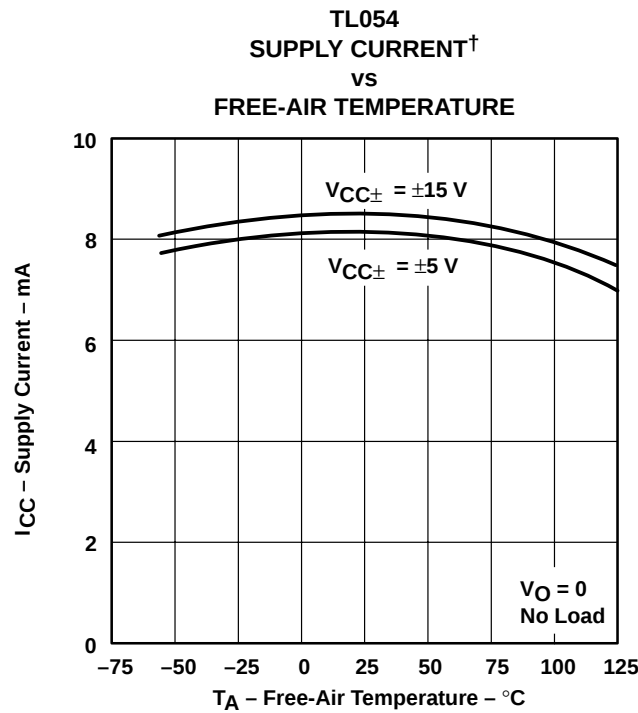

**Figure 47**

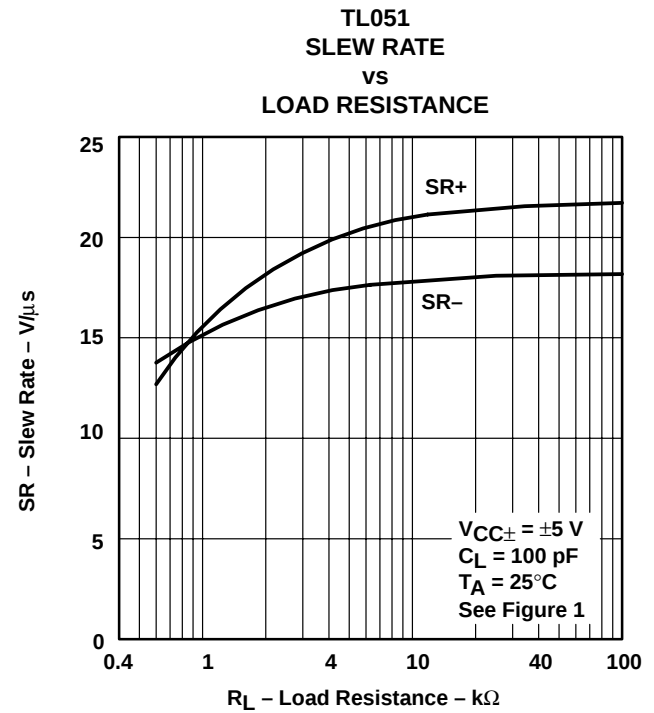

**Figure 48**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS

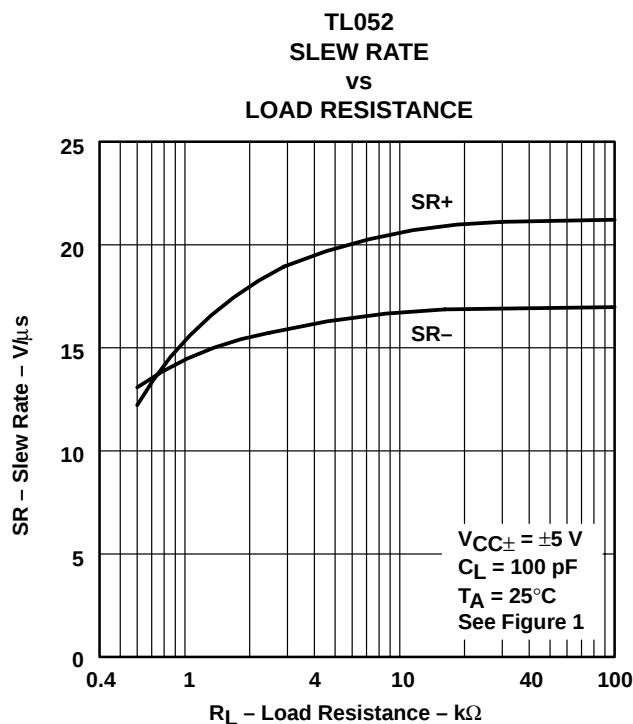


Figure 49

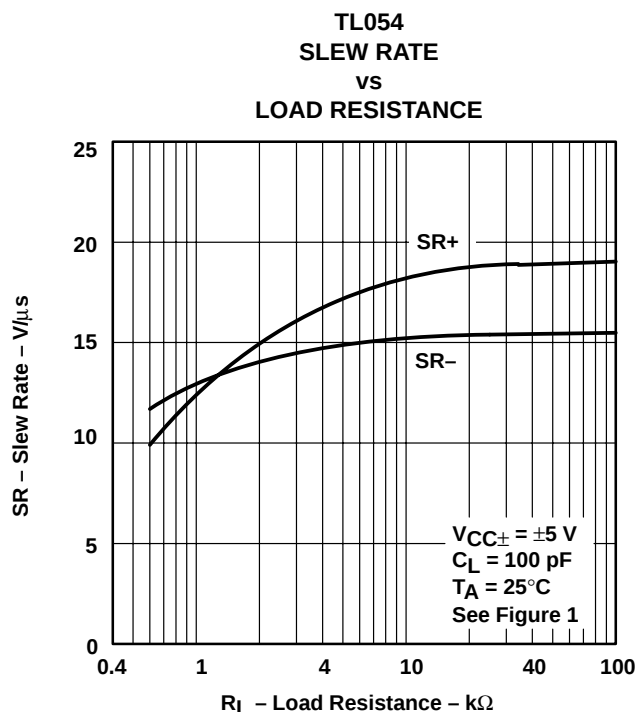


Figure 50

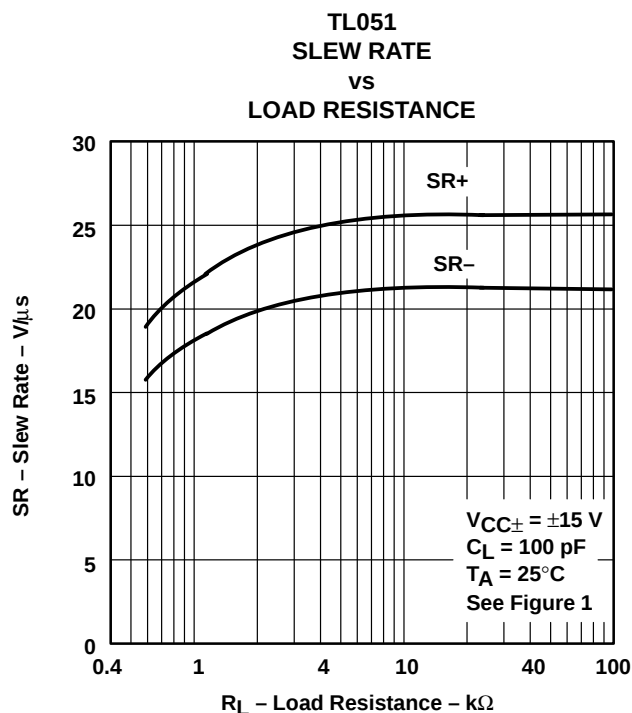


Figure 51



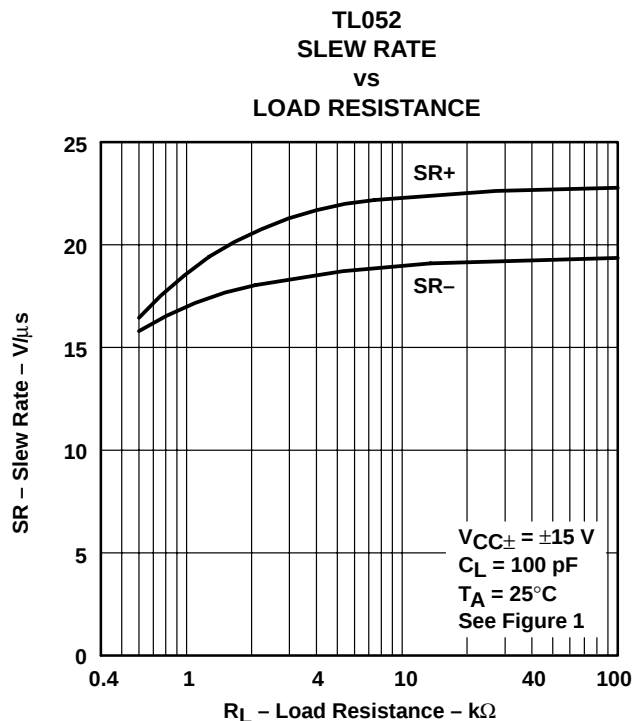


Figure 52


**TYPICAL CHARACTERISTICS**

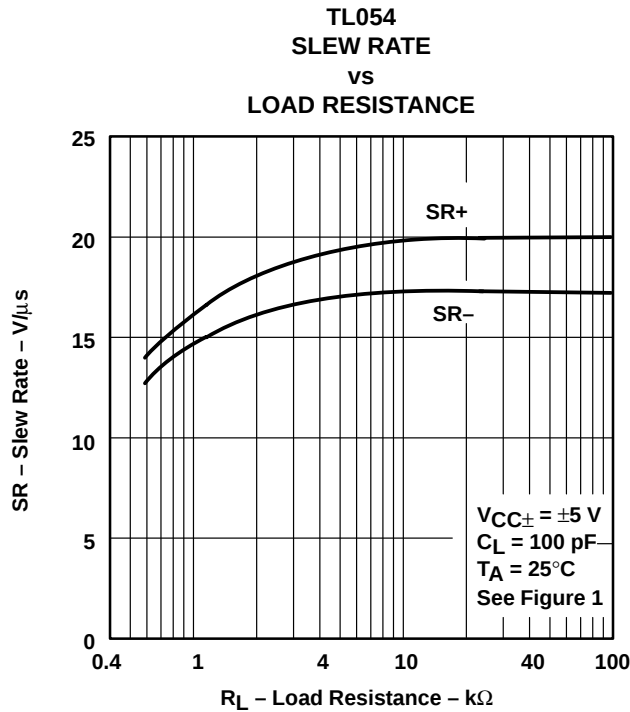


**Figure 53**

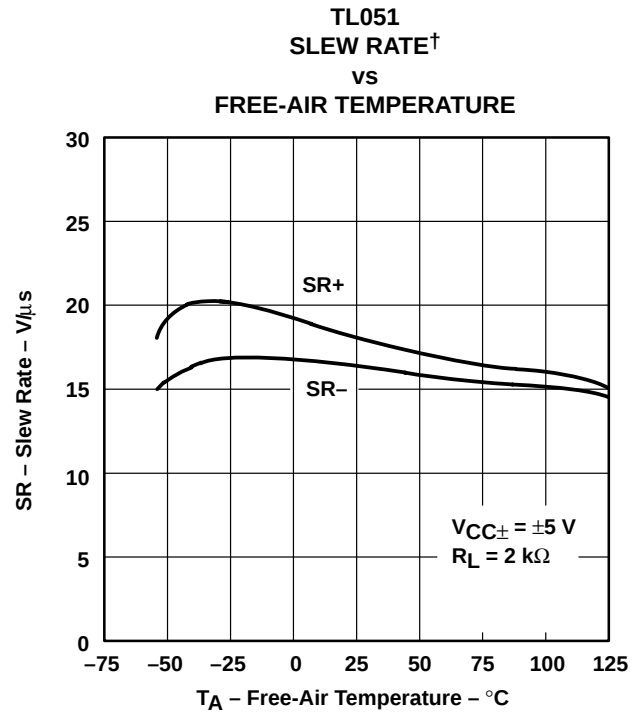

**Figure 54**

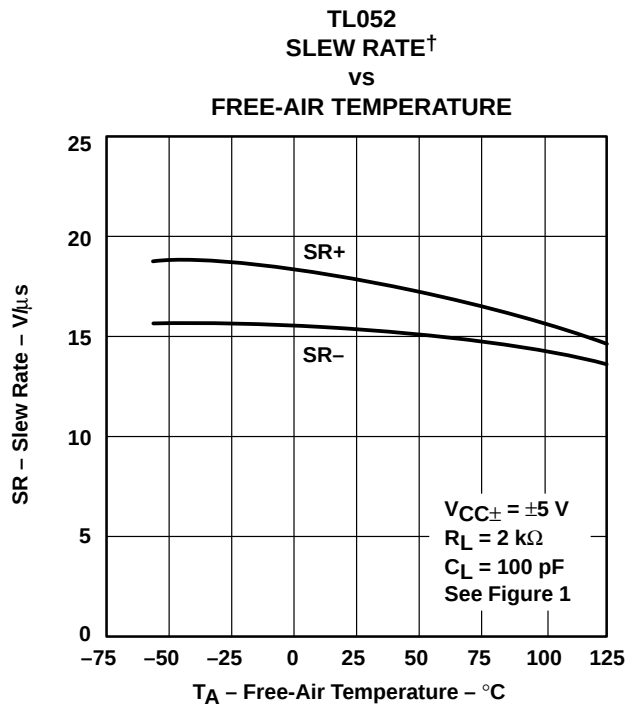

**Figure 55**

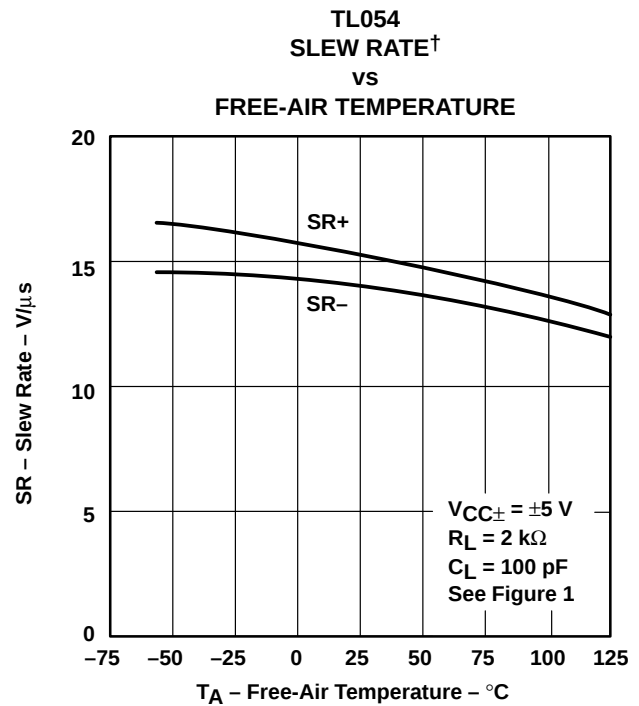

**Figure 56**

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS



<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS



Figure 61



Figure 62



Figure 63

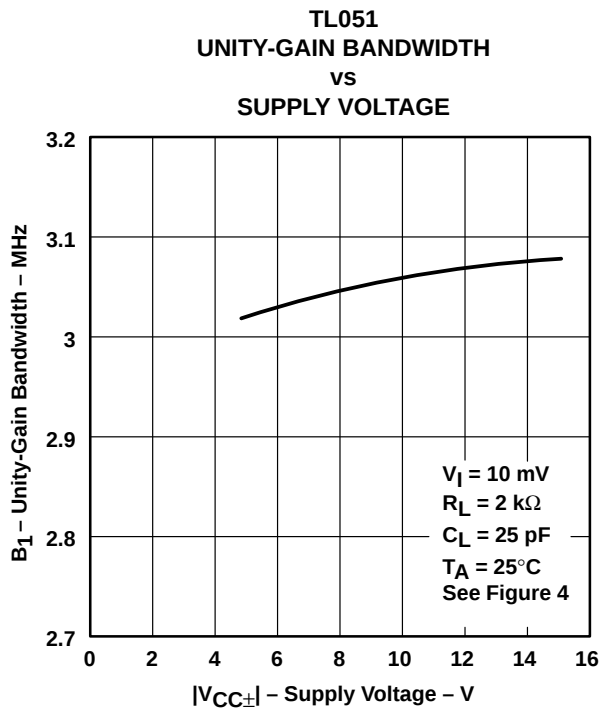


Figure 64

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS



Figure 65



Figure 66



Figure 67

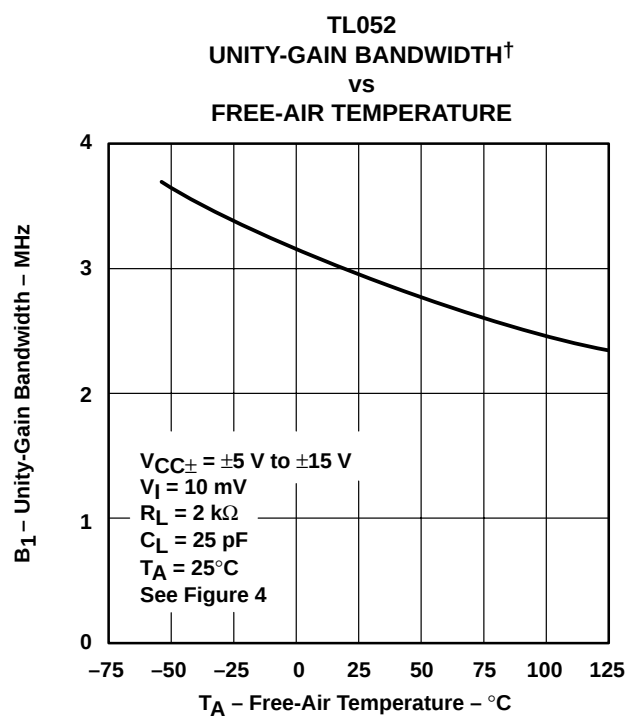


Figure 68

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TYPICAL CHARACTERISTICS

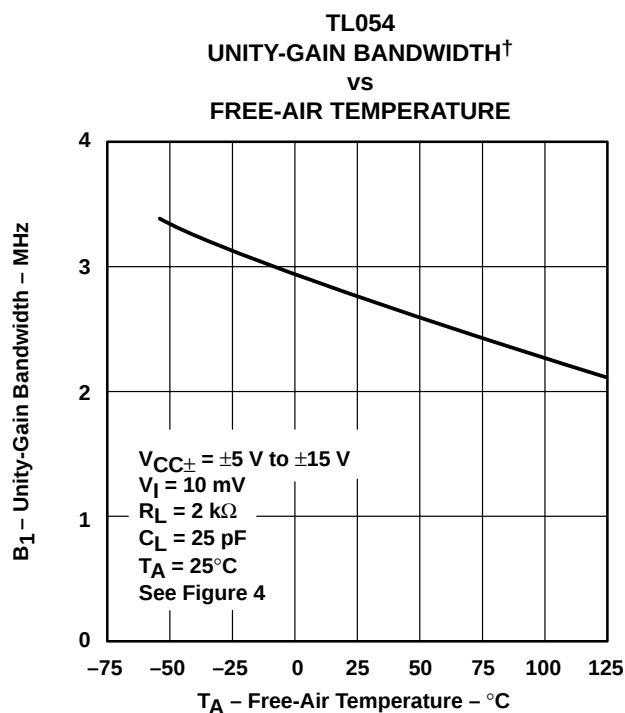


Figure 69

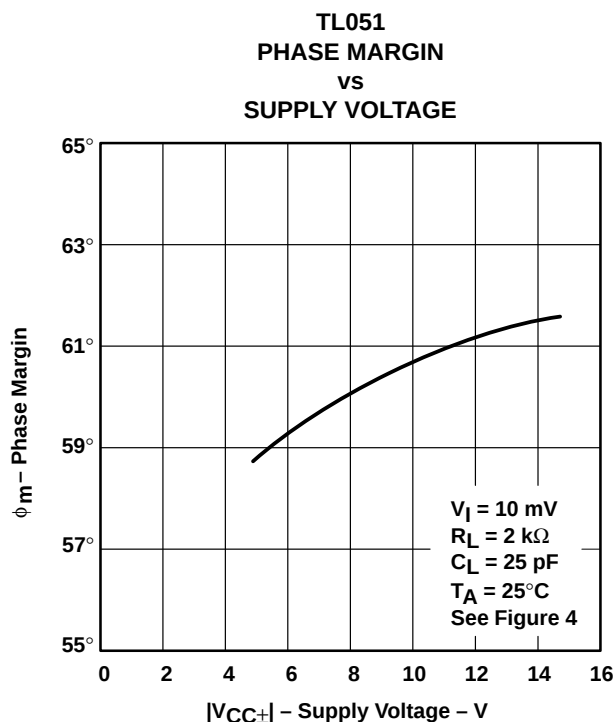


Figure 70

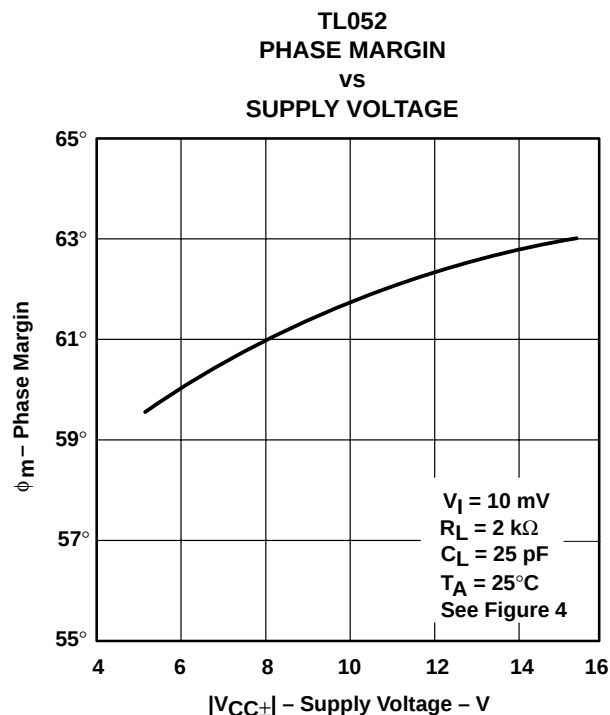


Figure 71

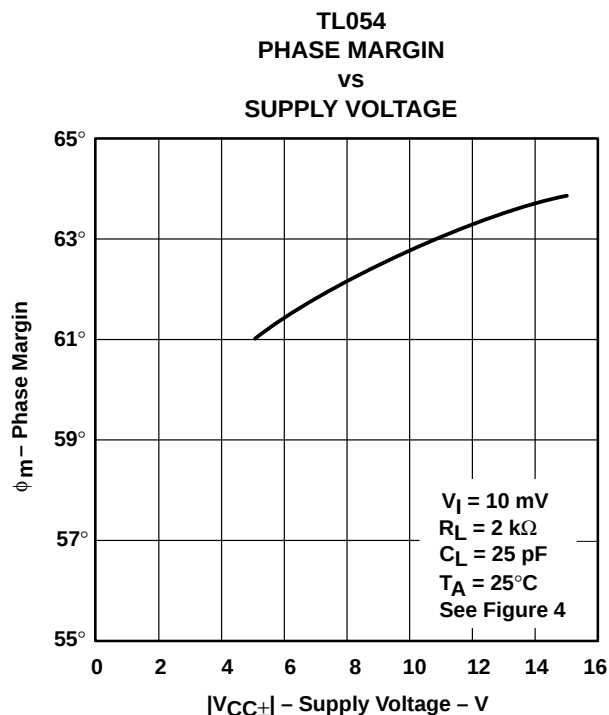


Figure 72

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS

**TL051  
PHASE MARGIN<sup>†</sup>  
vs  
LOAD CAPACITANCE**



Figure 73

**TL052  
PHASE MARGIN<sup>†</sup>  
vs  
LOAD CAPACITANCE**



Figure 74

**TL054  
PHASE MARGIN<sup>†</sup>  
vs  
LOAD CAPACITANCE**



Figure 75

<sup>†</sup> Values of phase margin below a load capacitance of 25 pF were estimated.

**TYPICAL CHARACTERISTICS**



**Figure 76**



**Figure 77**



**Figure 78**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## TYPICAL CHARACTERISTICS

VOLTAGE-FOLLOWER  
SMALL-SIGNAL  
PULSE RESPONSE



Figure 79

VOLTAGE-FOLLOWER  
LARGE-SIGNAL  
PULSE RESPONSE

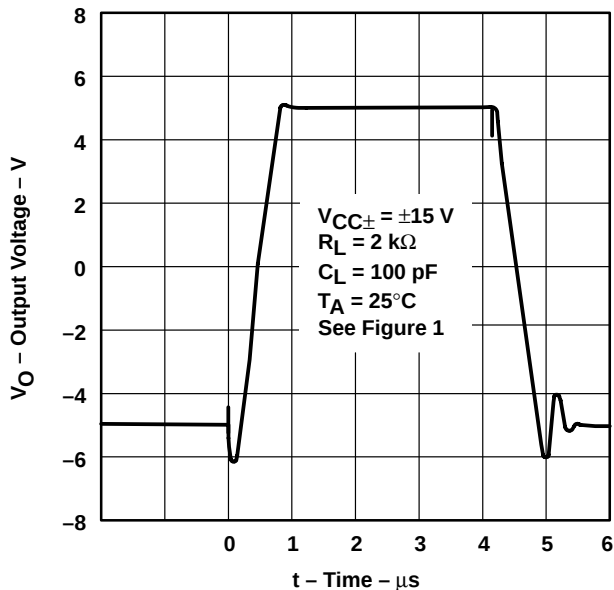


Figure 80

## APPLICATION INFORMATION

### output characteristics

All operating characteristics (except bandwidth and phase margin) are specified with 100-pF load capacitance. The TL05x and TL05xA drive higher capacitive loads; however, as the load capacitance increases, the resulting response pole occurs at lower frequencies, causing ringing, peaking, or even oscillation. The value of the load capacitance at which oscillation occurs varies with production lots. If an application appears to be sensitive to oscillation due to load capacitance, adding a small resistance in series with the load should alleviate the problem. Capacitive loads of 1000 pF, and larger, may be driven if enough resistance is added in series with the output (see Figure 81 and Figure 82).



Figure 81. Effect of Capacitive Loads



Figure 82. Test Circuit for Output Characteristics

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## APPLICATION INFORMATION

### input characteristics

The TL05x and TL05xA are specified with a minimum and a maximum input voltage that, if exceeded at either input, could cause the device to malfunction.

Because of the extremely high input impedance and resulting low-bias current requirements, the TL05x and TL05xA are well suited for low-level signal processing; however, leakage currents on printed-circuit boards and sockets easily can exceed bias current requirements and cause degradation in system performance. It is good practice to include guard rings around inputs (see Figure 83). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.

Unused amplifiers should be connected as grounded unity-gain followers to avoid possible oscillation.



Figure 83. Use of Guard Rings

### noise performance

The noise specifications in operational amplifier circuits are greatly dependent on the current in the first-stage differential amplifier. The low input-bias current requirements of the TL05x and TL05xA result in a very low current noise. This feature makes the devices especially favorable over bipolar devices when using values of circuit impedance greater than 50 k $\Omega$ .

## APPLICATION INFORMATION


### phase meter

The phase meter in Figure 84 produces an output voltage of 10 mV per degree of phase delay between the two input signals  $V_A$  and  $V_B$ . The reference signal  $V_A$  must be the same frequency as  $V_B$ . The TLC3702 comparators (U1) convert these two input sine waves into  $\pm 5$ -V square waves. Then, R1 and R4 provide level shifting prior to the SN74HC109 dual J-K flip flops.

Flip-flop U2B is connected as a toggle flip-flop and generates a square wave at one-half the frequency of  $V_B$ . Flip-flop U2A also produces a square wave at one-half the input frequency. The pulse duration of U2A varies from zero to one-half the period, where zero corresponds to zero phase delay between  $V_A$  and  $V_B$  and one-half the period corresponds to  $V_B$  lagging  $V_A$  by 360 degrees.

The output pulse from U2A causes the TLC4066 (U3) switch to charge the TL05x (U4) integrator capacitors C1 and C2. As the phase delay approaches 360 degrees, the output of U4A approximates a square wave, and U2A has an output of almost 2.5 V. U4B acts as a noninverting amplifier with a gain of 1.44 in order to scale the 0- to 2.5-V integrator output to a 0- to 3.6-V output range.

R8 and R10 provide output gain and zero-level calibration. This circuit operates over a 100-Hz to 10-kHz frequency range.

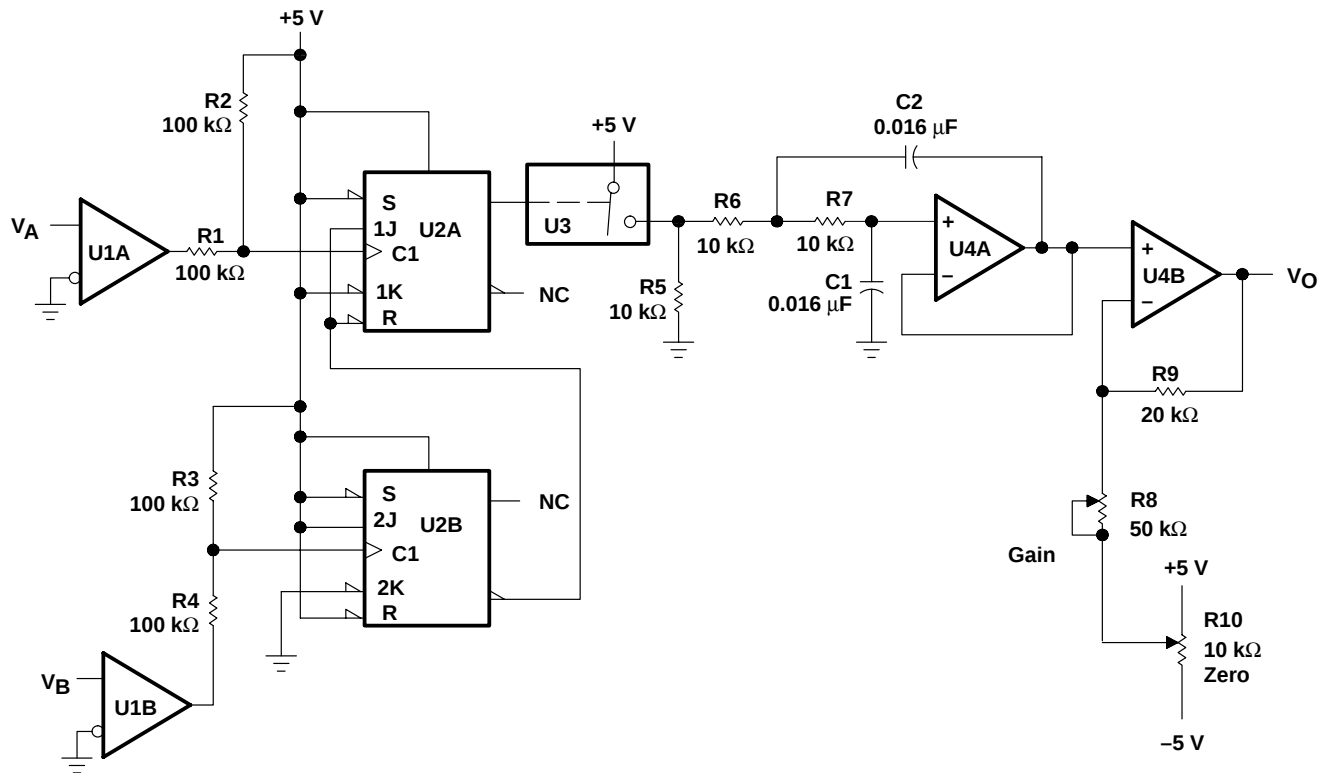

NOTE A: U1 = TLC3702;  $V_{CC\pm} = \pm 5$  V  
 U2 = SN74HC109  
 U3 = TLC4066  
 U4, U5 = TL05x;  $V_{CC\pm} = \pm 5$  V

Figure 84. Phase Meter

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS


SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## APPLICATION INFORMATION

### precision constant-current source over temperature

A precision current source (see Figure 85) benefits from the high input impedance and stability of Texas Instruments enhanced-JFET process. A low-current shunt regulator maintains 2.5 V between the inverting input and the output of the TL05x. The negative feedback then forces 2.5 V across the current-setting resistor R; therefore, the current to the load simply is 2.5 V divided by R.

Possible choices for the shunt regulator include the LT1004, LT1009, and LM385. If the regulator's cathode connects to the operational amplifier output, this circuit sources load current. Similarly, if the cathode connects to the inverting input, the circuit sinks current from the load. To minimize output current change with temperature, R should be a metal film resistor with a low temperature coefficient. Also, this circuit must be operated with split-voltage supplies.

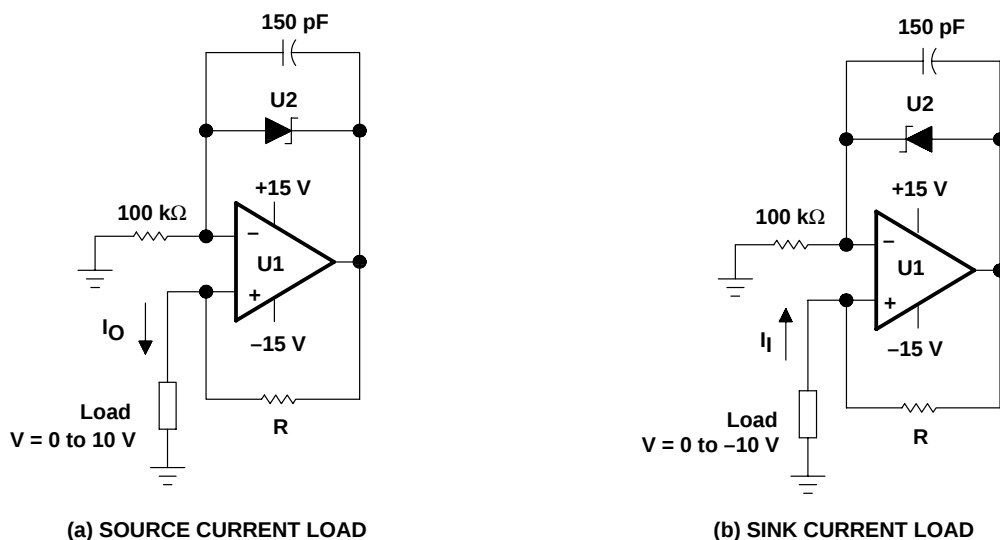

NOTE A: U1 = 1/2 TL05x  
 U2 = LM385, LT1004, or LT1009 voltage reference  
 $I = \frac{2.5 \text{ V}}{R}$ , R = Low-temperature-coefficient metal-film resistor

Figure 85. Precision Constant-Current Source

## APPLICATION INFORMATION

### instrumentation amplifier with adjustable gain/null

The instrumentation amplifier in Figure 86 benefits greatly from the high input impedance and stable input offset voltage of the TL05xA. Amplifiers U1A, U1B, and U2A form the actual instrumentation amplifier, while U2B provides offset null. Potentiometer R1 provides gain adjustment. With  $R1 = 2\text{ k}\Omega$ , the circuit gain equals 100, while with  $R1 = 200\text{ k}\Omega$ , the circuit gain equals two. The following equation shows the instrumentation amplifier gain as a function of  $R1$ :

$$A_V = 1 + \left( \frac{R2 + R3}{R1} \right)$$

Readjusting the offset null is necessary when the circuit gain is changed. If U2B is needed for another application,  $R7$  can be terminated at ground. The low input offset voltage of the TL05xA minimizes the dc error of the circuit. For best matching, all resistors should be one-percent tolerance. The matching between  $R4$ ,  $R5$ ,  $R6$ , and  $R7$  controls the CMRR of this application.

The following equation shows the output voltages when the input voltage equals zero. This dc error can be nulled by adjusting the offset null potentiometer; however, any change in offset voltage over time or temperature also creates an error. To calculate the error from changes in offset, consider the three offset components in the equation as delta offsets, rather than initial offsets. The improved stability of Texas Instruments enhanced JFETs minimizes the error resulting from change in input offset voltage with time. Assuming  $V_I$  equals zero,  $V_O$  can be shown as a function of the offset voltage:

$$V_O = V_{IO2} \left[ \left( 1 + \frac{R3}{R1} \right) \left( \frac{R7}{R5 + R7} \right) \left( 1 + \frac{R6}{R4} \right) + \frac{R2}{R1} \left( \frac{R6}{R4} \right) \right] \\ - V_{IO1} \left[ \frac{R3}{R1} \left( \frac{R7}{R5 + R7} \right) \left( 1 + \frac{R6}{R4} \right) + \frac{R6}{R4} \left( 1 + \frac{R2}{R1} \right) \right] + V_{IO3} \left( 1 + \frac{R6}{R4} \right)$$



Figure 86. Instrumentation Amplifier

## APPLICATION INFORMATION

### high input impedance log amplifier

The low input offset voltage and high input impedance of the TL05xA creates a precision log amplifier (see Figure 87). IC1 is a 2.5-V, low-current precision, shunt regulator. Transistors Q1 and Q2 must be a closely matched npn pair. For best performance over temperature, R4 should be a metal-film resistor with a low temperature coefficient.

In this circuit, U1A serves as a high-impedance unity-gain buffer. Amplifier U1B converts the input voltage to a current through R1 and Q1. Amplifier U1C, IC1, and R4 form a 1- $\mu$ A temperature-stable current source that sets the base-emitter voltage of Q2. U1D amplifies the difference between the base-emitter voltage of Q1 and Q2 (see Figure 88). The output voltage is given by the following equation:

$$V_O = -\left[1 + \frac{R_6}{R_5}\right] \frac{kT}{q} \left[ \ln \frac{V_I}{(R_1 \times 1 \times 10^{-6})} \right] \text{ where } k = 1.38 \times 10^{-23}, q = 1.602 \times 10^{-19}, \text{ and } T \text{ is Kelvin temperature}$$



NOTE A: U1A through U1D = TL05xA. IC1 = LM385, LT1004, or LT1009 voltage reference

**Figure 87. Log Amplifier**



**Figure 88. Output Voltage vs Input Voltage for Log Amplifier**


## APPLICATION INFORMATION

### analog thermometer

By combining a current source that does not vary over temperature with an instrumentation amplifier, a precise analog thermometer can be built (see Figure 89). Amplifier U1A and IC1 establish a constant current through the temperature-sensing diode D1. For this section of the circuit to operate correctly, the TL05x must use split supplies, and R3 must be a metal-film resistor with a low temperature coefficient.

The temperature-sensitive voltage from the diode is compared to a temperature-stable voltage reference set by IC2. R4 should be adjusted to provide the correct output voltage when the diode is at a known temperature. Although this potentiometer resistance varies with temperature, the divider ratio of the potentiometer remains constant.

Amplifiers U1B, U2A, and U2B form the instrumentation amplifier that converts the difference between the diode and reference voltage to a voltage proportional to the temperature. With switch S1 closed, the amplifier gain equals 5 and the output voltage is proportional to temperature in degrees Celsius. With S1 open, the amplifier gain is 9 and the output is proportional to temperature in degrees Fahrenheit. Every time S1 is changed, R4 must be recalibrated. By setting S1 correctly, the output voltage equals 10 mV per degree (C or F).

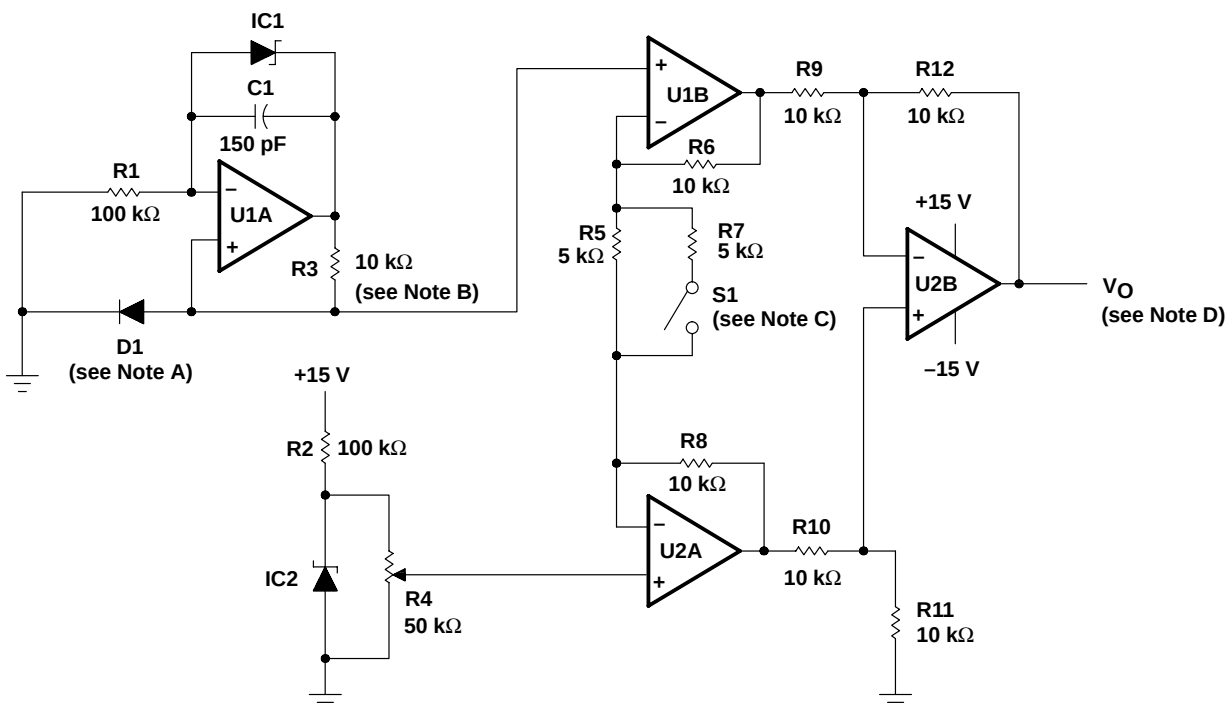

- NOTES: A. Temperature-sensing diode  $\approx (-2 \text{ mV}/^\circ\text{C})$   
 B. Metal-film resistor (low temperature coefficient)  
 C. Switch open for  $^\circ\text{F}$  and closed for  $^\circ\text{C}$   
 D.  $V_O \propto \text{temperature}$ ;  $10 \text{ mV}/^\circ\text{C}$  or  $10 \text{ mV}/^\circ\text{F}$   
 E. U1, U2 = TL05x. IC1, IC2 = LM385, LT1004, or LT1009 voltage reference

Figure 89. Analog Thermometer

## APPLICATION INFORMATION

### voltage-ratio-to-dB converter

The application in Figure 90 measures the amplitude ratio of two signals, then converts the ratio to decibels (see Figure 91). The output voltage provides a resolution of 100 mV/dB. The two inputs can be either dc or sinusoidal ac signals. When using ac signals, both signals should be the same frequency or output glitches will occur. For measuring two input signals of different frequencies, extra filtering should be added after the rectifiers.

The circuit contains three low-offset TL05xA devices. Two of these devices provide the rectification and logarithmic conversion of the inputs. The third TL05xA forms an instrumentation amplifier. The stage performing the logarithmic conversion also requires two well-matched npn transistors.

The input signal first passes through a high-impedance unity-gain buffer U1A (U2A). Then U1B (U2B) rectifies the input signal at a gain of 0.5, and U1C (U2C) provides a noninverting gain of 2, so that the system gain is still one. U1D (U2D), R6 (R13), and Q1 (Q2) perform the logarithmic conversion of the rectified input signal. The instrumentation amplifier formed by U3A, U3B, U3D scales the difference of the two logarithmic voltages by a gain of 33.6. As a result, the output voltage equals 100 mV/dB. The 1-kΩ potentiometer on the input of U3C calibrates the zero-dB reference level. The following equations are used to derive the relationship between the input voltage ratio, expressed in decibels, and the output voltage.

$$X \text{ dB} = 20 \log \left[ \frac{V_A}{V_B} \right] = 20 \left[ \frac{\ln(V_A) - \ln(V_B)}{\ln(10)} \right]$$

$$X \text{ dB} = 8.686 \left[ \ln(V_A) - \ln(V_B) \right]$$

$$V_{BE(Q1)} = \frac{kT}{q} \ln \left[ \frac{V_A}{R \times I_S} \right] \quad V_{BE(Q2)} = \frac{kT}{q} \ln \left[ \frac{V_B}{R \times I_S} \right]$$

$$\Delta V_{BE} = V_{BE(Q1)} - V_{BE(Q2)} = \frac{kT}{q} \left[ \ln(V_A) - \ln(V_B) \right]$$


$$X \text{ dB} = \frac{8.686}{kT/q} \left[ V_{BE(Q1)} - V_{BE(Q2)} \right] = 336 \left[ V_{BE(Q1)} - V_{BE(Q2)} \right] \text{ at } 25^\circ\text{C}$$

where

$$k = 1.38 \times 10^{-23}, \quad q = 1.602 \times 10^{-19}, \quad \text{and } T \text{ is Kelvin temperature}$$


This gives a resolution of 1 V/dB. Therefore, the gain of the instrumentation amplifier is set at 33.6 to obtain 100 mV/dB.

## APPLICATION INFORMATION

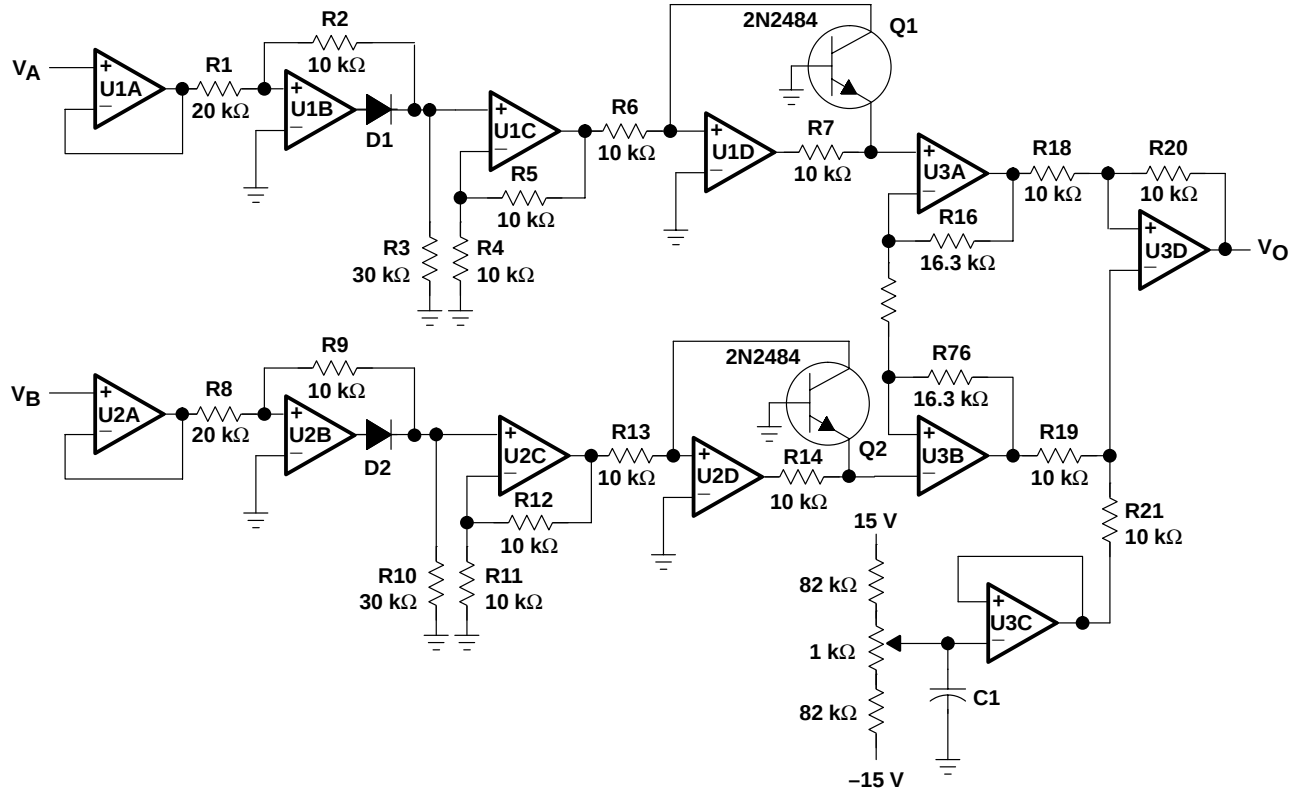

NOTE A: U1A through U3D = TL05xA,  $V_{CC\pm} = \pm 15$  V. D1 and D2 = 1N914.

**Figure 90. Voltage Ratio-to-dB Converter**

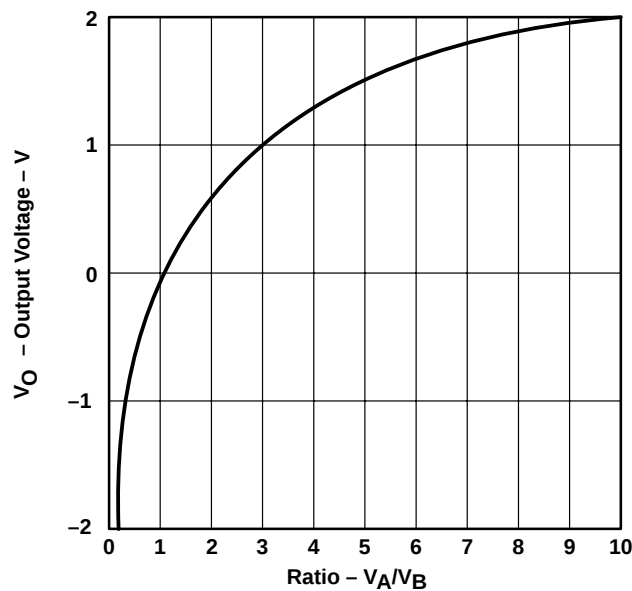

**Figure 91. Output Voltage vs the Ratio of the Input Voltages for Voltage-to-dB Converter**

# TL05x, TL05xA ENHANCED-JFET LOW-OFFSET OPERATIONAL AMPLIFIERS

SLOS178A – FEBRUARY 1997 - REVISED FEBRUARY 2003

## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using Microsim *Parts*™, the model-generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 6 and subcircuit Figure 92) are generated using the TL05x typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 6: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).



Figure 92. Boyle Macromodel and Subcircuit

*PSpice* and *Parts* are trademarks of MicroSim Corporation.

Macromodels, simulation models, or other models provided by TI, directly or indirectly, are not warranted by TI as fully representing all of the specification and operating characteristics of the semiconductor product to which the model relates.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TL051ACD         | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL051ACDE4       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL051ACP         | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL051ACPE4       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL051AID         | OBSOLETE              | SOIC         | D               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL051AIP         | OBSOLETE              | PDIP         | P               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL051CD          | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL051CDE4        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL051CDR         | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL051CDRE4       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL051CP          | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL051CPE4        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL051ID          | OBSOLETE              | SOIC         | D               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL051IDR         | OBSOLETE              | SOIC         | D               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL051IP          | OBSOLETE              | PDIP         | P               | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL052ACD         | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052ACDE4       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052ACDR        | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052ACDRE4      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052ACP         | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052ACPE4       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052AID         | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052AIDE4       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052AIDR        | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052AIDRE4      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052AIP         | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052AIPE4       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TL052AMFKB       | OBSOLETE              | LCCC         | FK              | 20   |             | TBD                     | Call TI          | Call TI                      |
| TL052AMJGB       | OBSOLETE              | CDIP         | JG              | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL052CD          | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052CDE4        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052CDR         | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052CDRE4       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052CP          | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052CPE4        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052CPSR        | ACTIVE                | SO           | PS              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052CPSRE4      | ACTIVE                | SO           | PS              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052ID          | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052IDE4        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052IDR         | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052IDRE4       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL052IP          | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052IPE4        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL052MFKB        | OBSOLETE              | LCCC         | FK              | 20   |             | TBD                     | Call TI          | Call TI                      |
| TL052MJG         | OBSOLETE              | CDIP         | JG              | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL052MJGB        | OBSOLETE              | CDIP         | JG              | 8    |             | TBD                     | Call TI          | Call TI                      |
| TL054ACD         | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054ACDE4       | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054ACDR        | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054ACDRE4      | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054ACN         | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054ACNE4       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054AID         | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054AIDE4       | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054AIDR        | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TL054AIDRE4      | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054AIN         | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054AINE4       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054AMFKB       | OBSOLETE              | LCCC         | FK              | 20   |             | TBD                     | Call TI          | Call TI                      |
| TL054AMJB        | OBSOLETE              | CDIP         | J               | 14   |             | TBD                     | Call TI          | Call TI                      |
| TL054CD          | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CDBR        | ACTIVE                | SSOP         | DB              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CDBRE4      | ACTIVE                | SSOP         | DB              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CDE4        | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CDR         | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CDRE4       | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CN          | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054CNE4        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054CNSR        | ACTIVE                | SO           | NS              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054CNSRE4      | ACTIVE                | SO           | NS              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054ID          | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054IDE4        | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054IDR         | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054IDRE4       | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TL054IN          | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054INE4        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC               |
| TL054MFKB        | OBSOLETE              | LCCC         | FK              | 20   |             | TBD                     | Call TI          | Call TI                      |
| TL054MJ          | OBSOLETE              | CDIP         | J               | 14   |             | TBD                     | Call TI          | Call TI                      |
| TL054MJB         | OBSOLETE              | CDIP         | J               | 14   |             | TBD                     | Call TI          | Call TI                      |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

---

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## JG (R-GDIP-T8)

## CERAMIC DUAL-IN-LINE

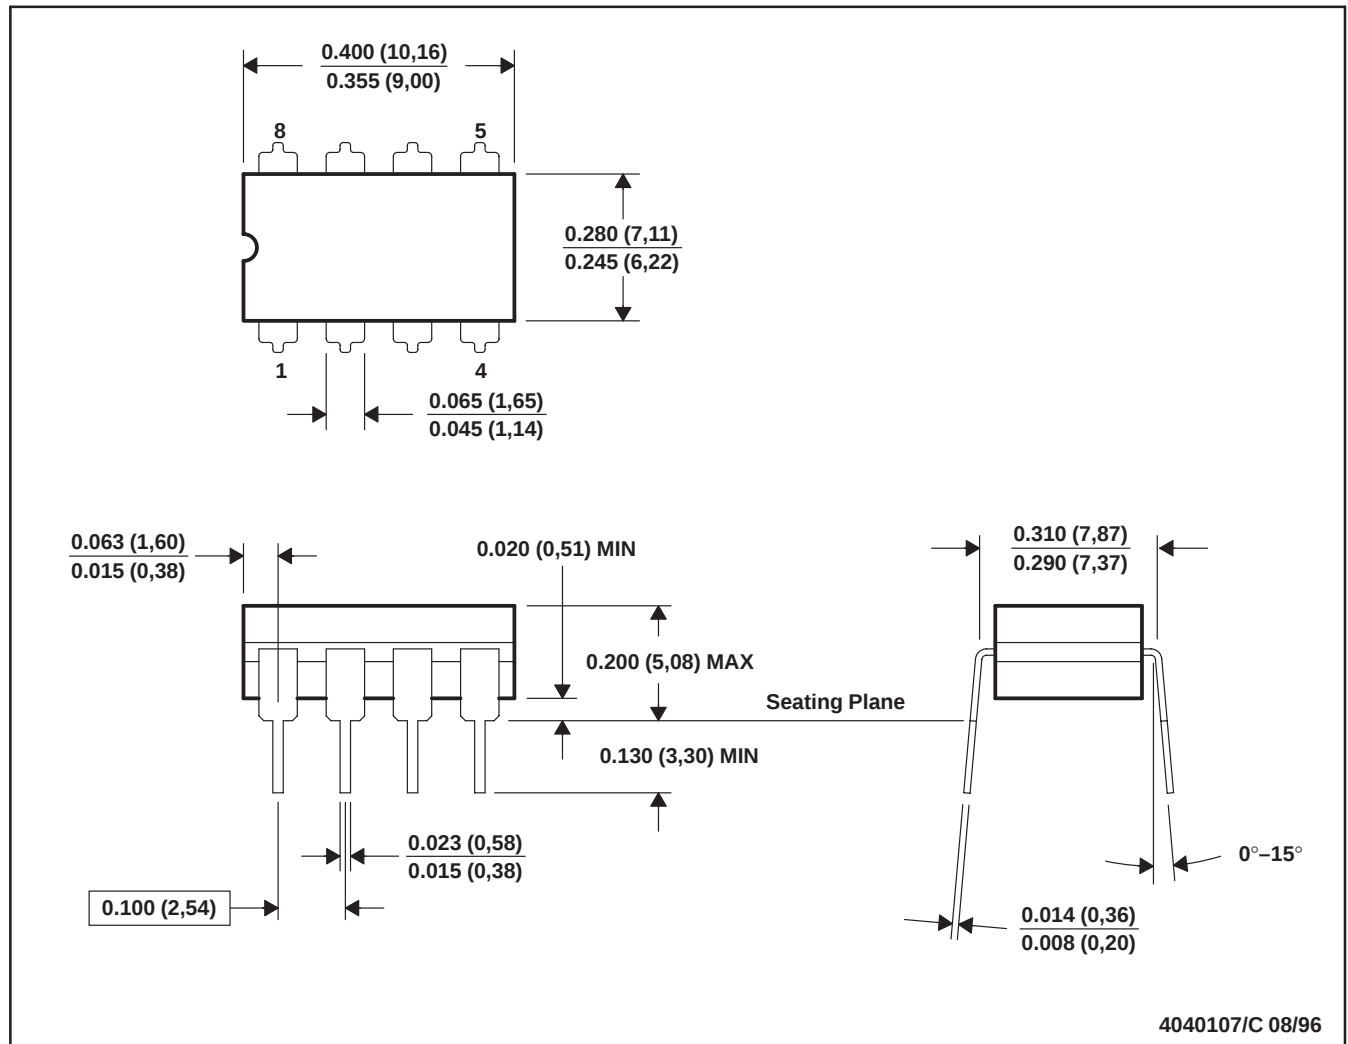


- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification.
  - Falls within MIL STD 1835 GDIP1-T8


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

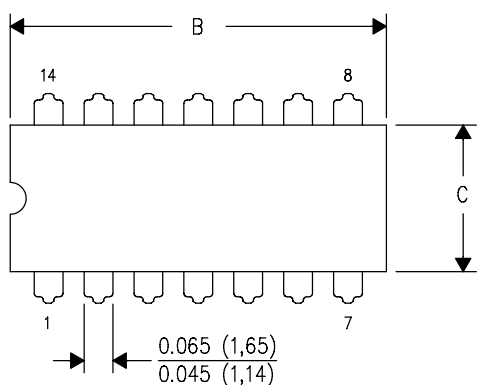

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

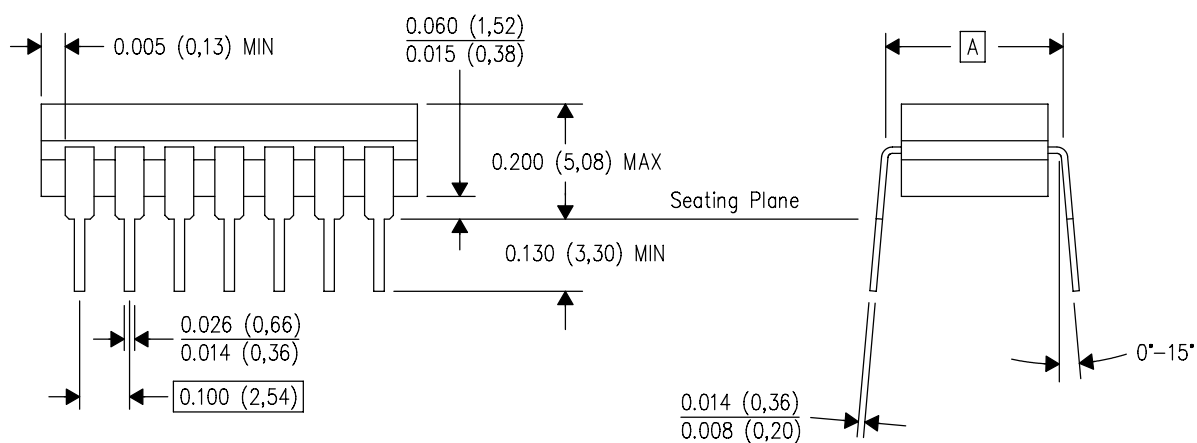


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER


28 TERMINAL SHOWN

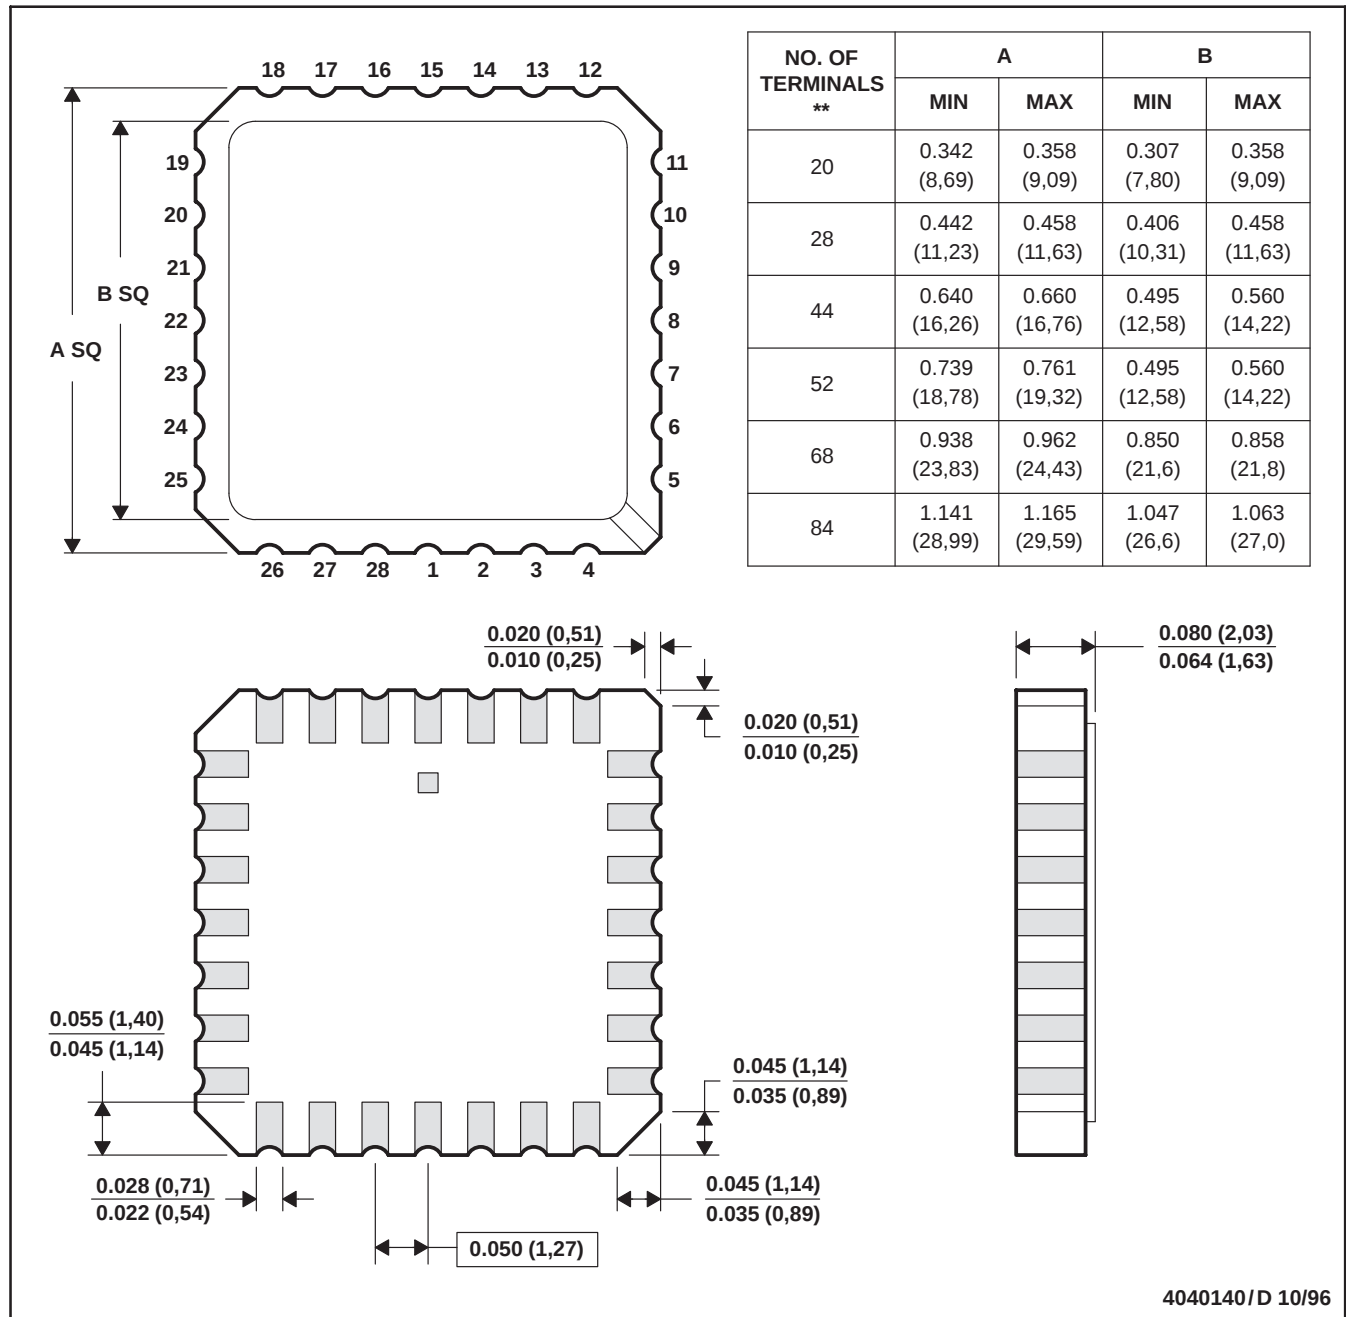

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - The terminals are gold plated.
  - Falls within JEDEC MS-004

## P (R-PDIP-T8)

## PLASTIC DUAL-IN-LINE

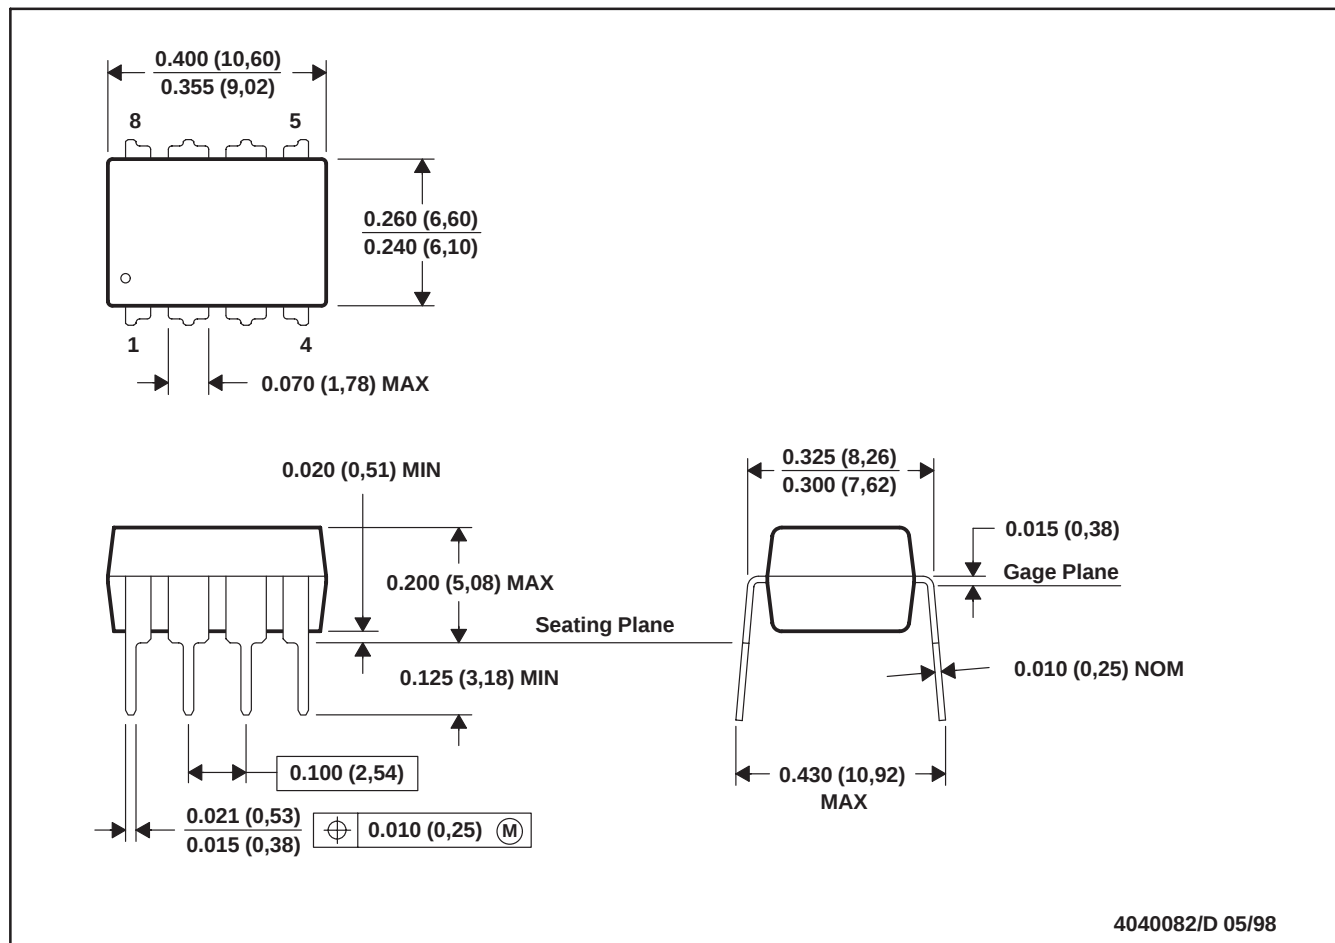

NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Falls within JEDEC MS-001

For the latest package information, go to [http://www.ti.com/sc/docs/package/pkg\\_info.htm](http://www.ti.com/sc/docs/package/pkg_info.htm)




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


N (R-PDIP-T\*\*)

16 PINS SHOWN

# PLASTIC DUAL-IN-LINE PACKAGE

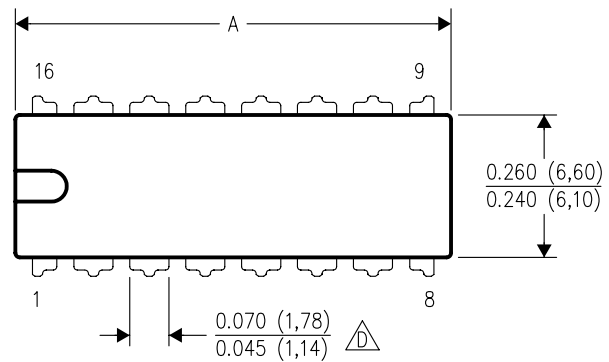

| DIM \ PINS **       | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

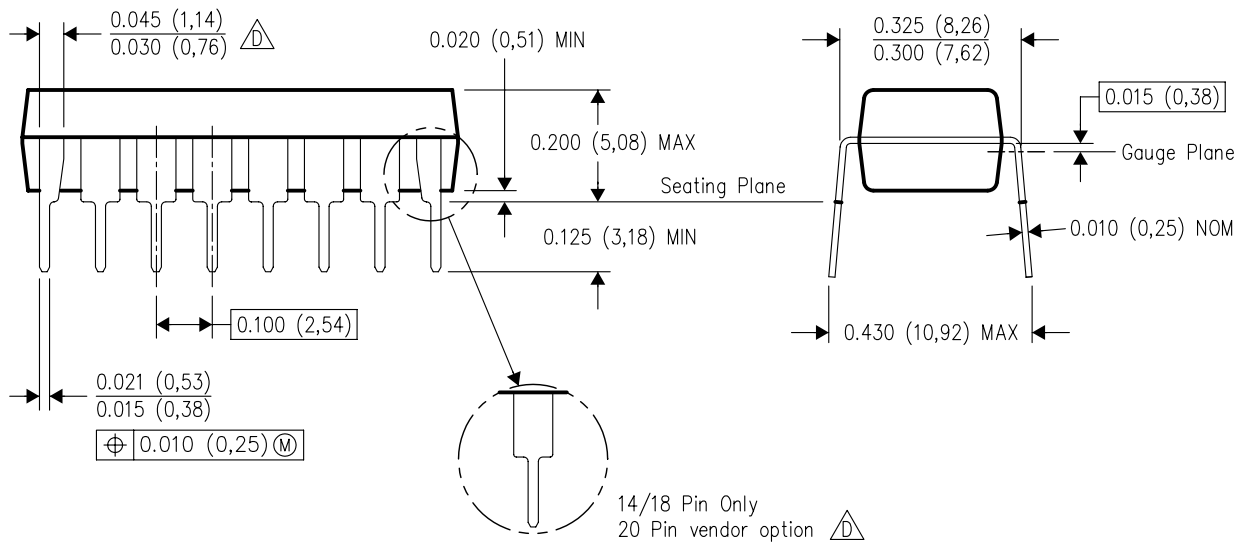


4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

## D (R-PDSO-G14)


## PLASTIC SMALL-OUTLINE PACKAGE

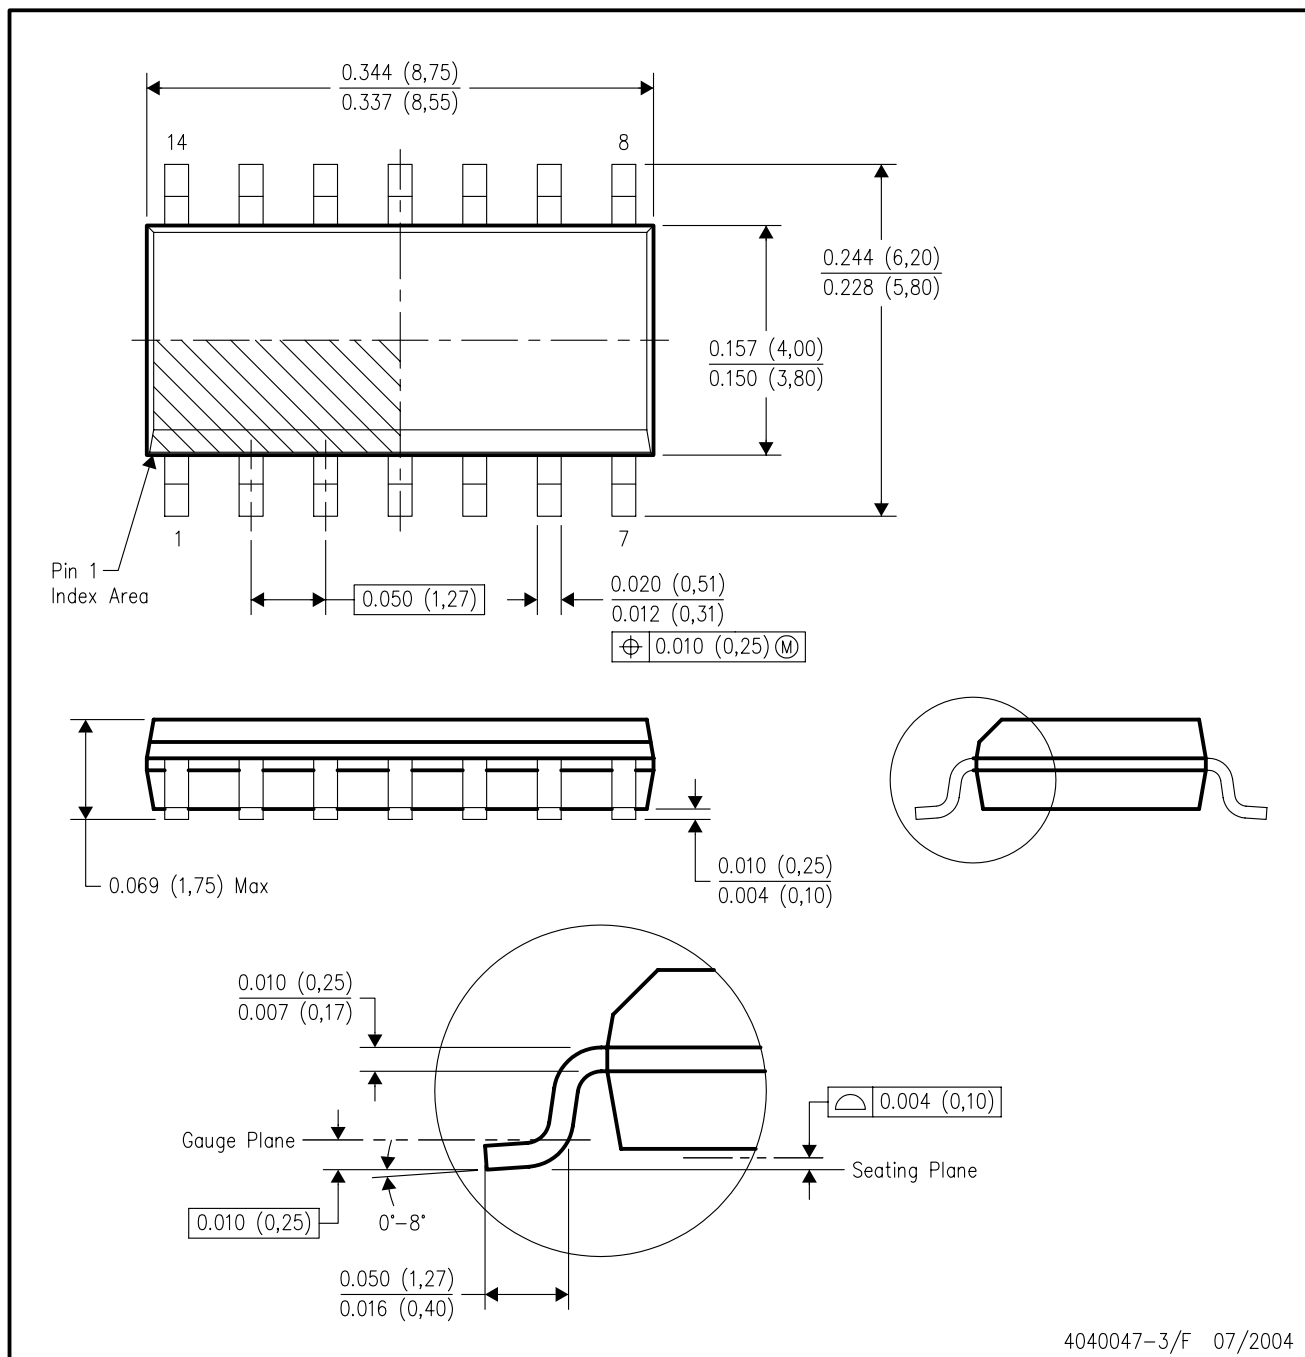

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - Falls within JEDEC MS-012 variation AB.

D (R-PDSO-G8)

# PLASTIC SMALL-OUTLINE PACKAGE

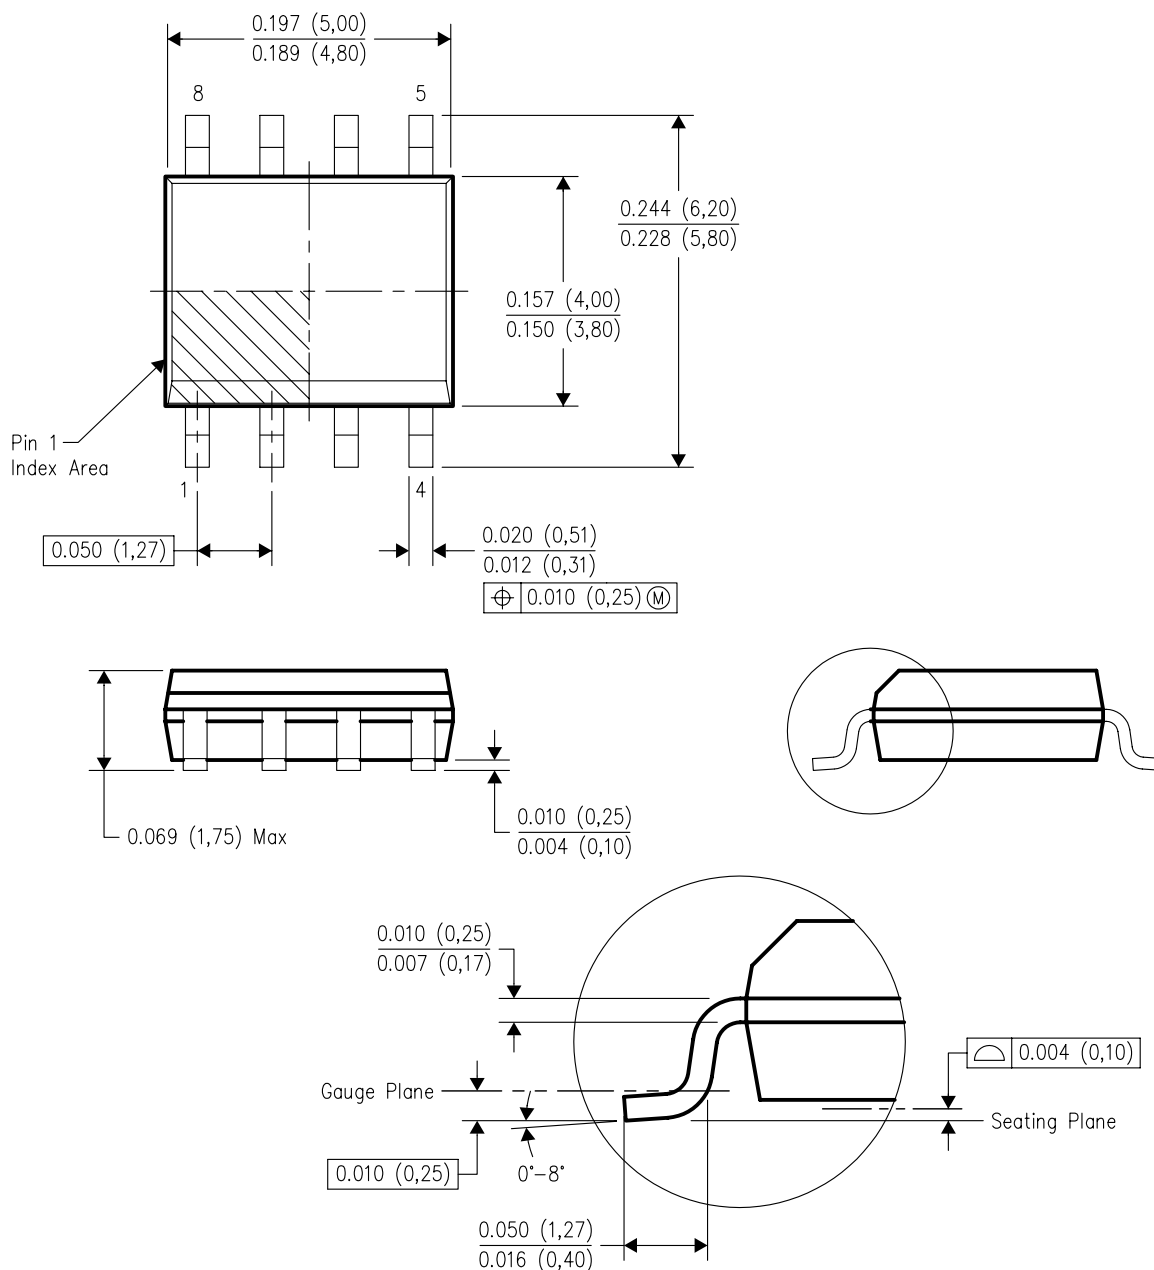


4040047-2/F 07/2004

- NOTES: A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.  
C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).  
D. Falls within JEDEC MS-012 variation AA.

# MECHANICAL DATA

PS (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

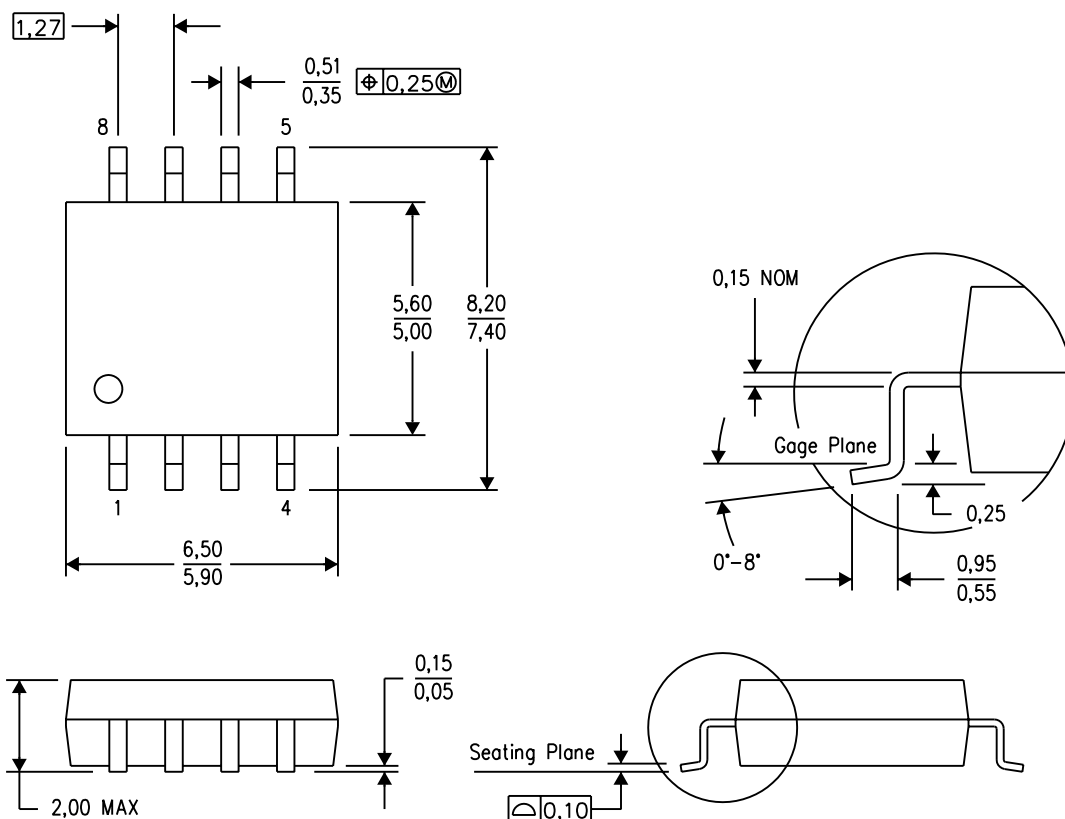

4040063/C 03/03


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN

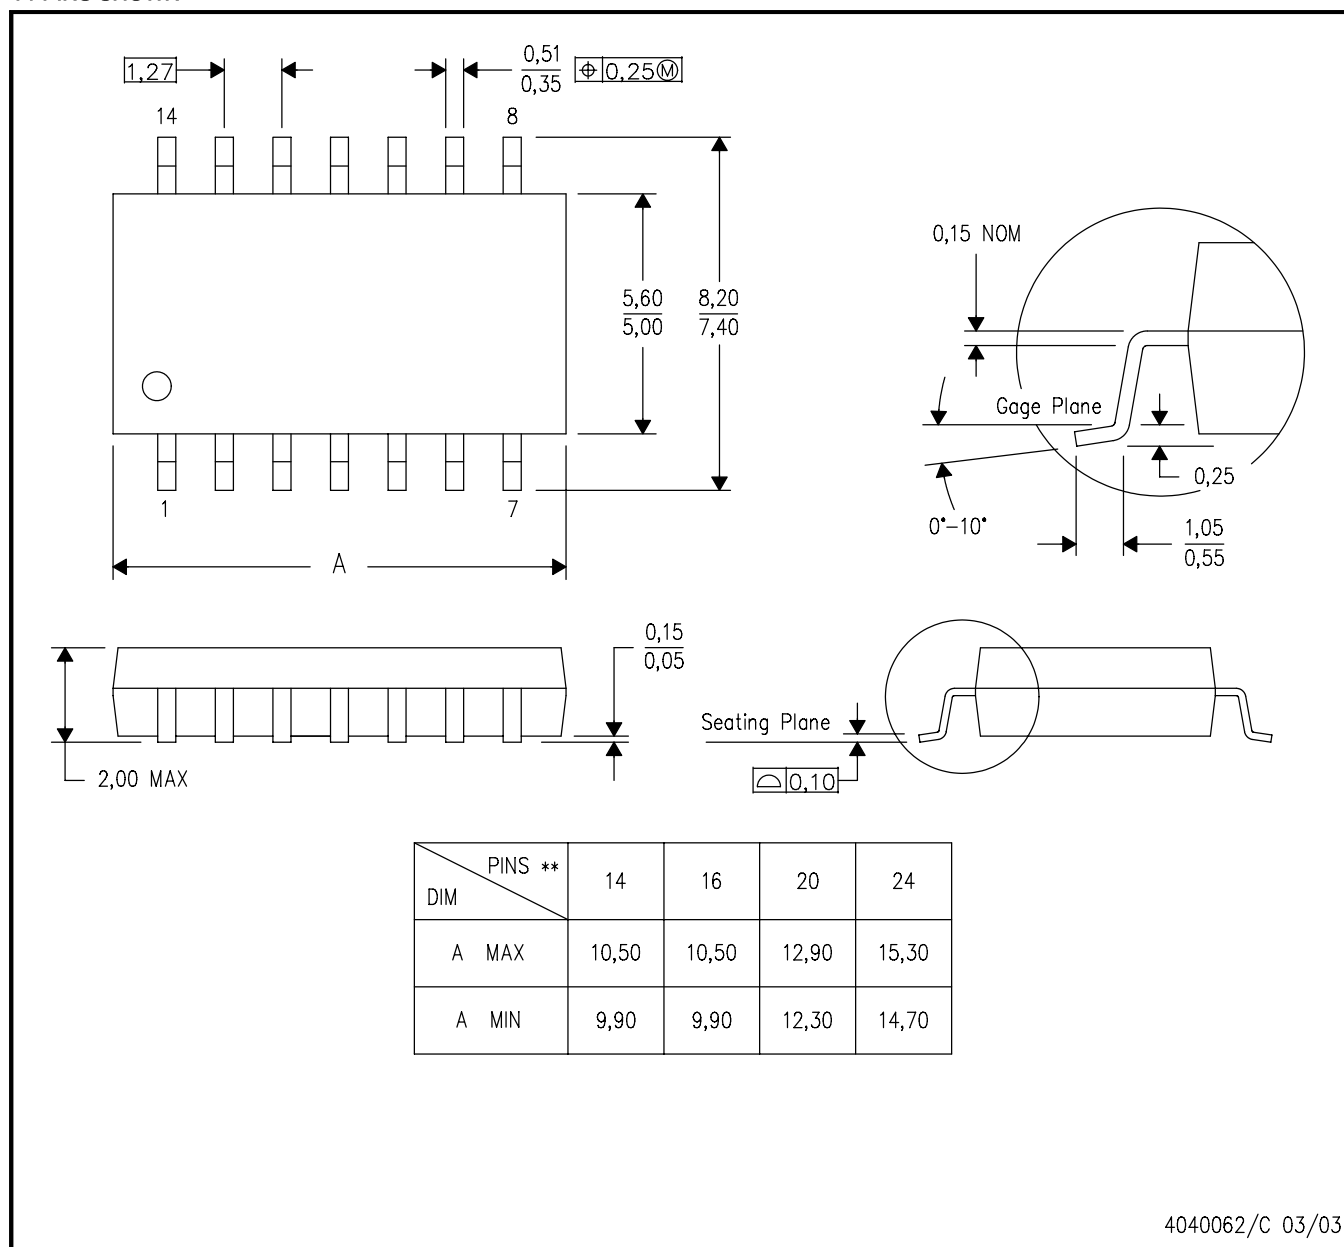


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

28 PINS SHOWN

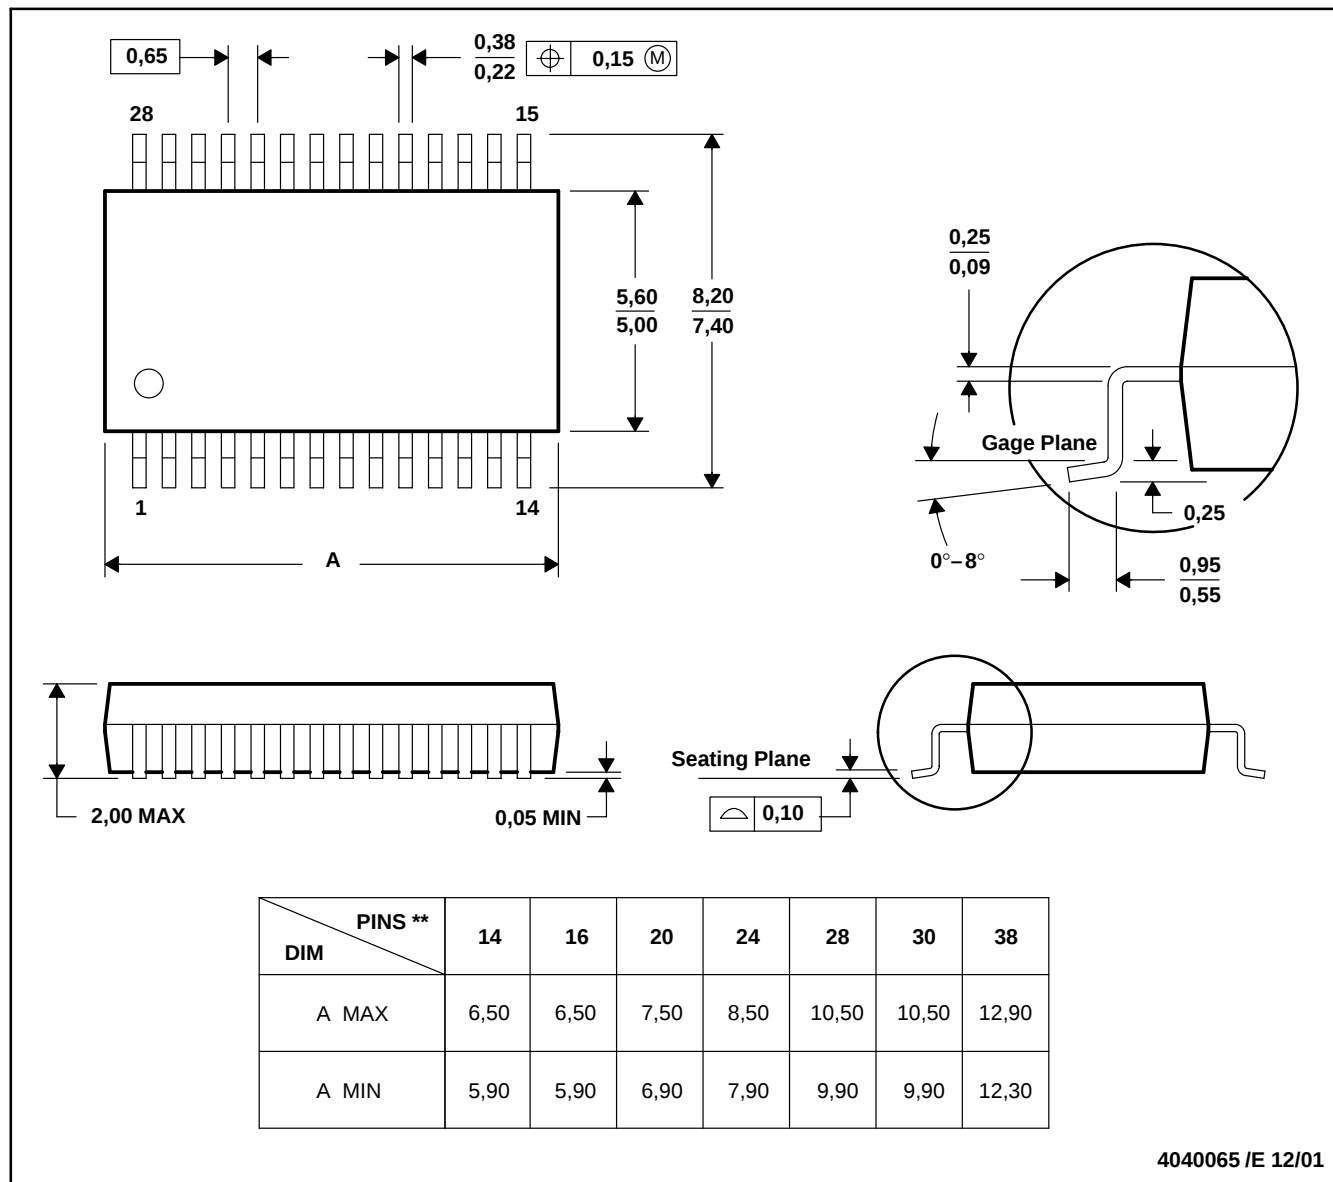

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-150

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |                                                                    | <b>Applications</b> |                                                                          |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |                                                                    | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated