



S1AB - S1MB

1.0 AMP. Surface Mount Rectifiers


SMB/DO-214AA

Features

- ✧ UL Recognized File # E-326243
- ✧ For surface mounted application
- ✧ Glass passivated junction chip.
- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ Easy pick and place
- ✧ High surge current capability
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-0
- ✧ High temperature soldering: 260°C / 10 seconds at terminals
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Case: Molded plastic
- ✧ Terminals: Pure tin plated, lead free.
- ✧ Polarity: Indicated by cathode band
- ✧ Packaging: 12mm tape per EIA STD RS-481
- ✧ Weight: 0.093 grams

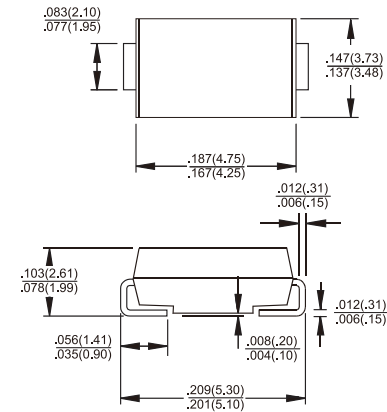

Dimensions in inches and (millimeters)

Marking Diagram



S1XB = Specific Device Code
 G = Green Compound
 Y = Year
 M = Work Month

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	S1 AB	S1 BB	S1 DB	S1 GB	S1 JB	S1 KB	S1 MB	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T _L = 110 °C	I _{F(AV)}	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	1.1							V
Maximum DC Reverse Current at @ T _A = 25 °C	I _R	5							uA
Rated DC Blocking Voltage (Note 1) @ T _A = 125 °C		50							uA
Typical Junction Capacitance (Note 3)	C _j	12							pF
Typical Thermal Resistance (Note 2)	R _{θJL}	30							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured on P.C. Board with 0.4" x 0.4" (10mm x 10mm) Copper Pad Areas.
 3. Measured at 1 MHz and Applied V_s = 4.0 Volts

RATINGS AND CHARACTERISTIC CURVES (S1AB THRU S1MB)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

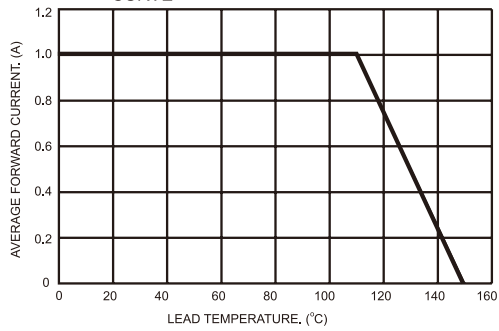


FIG.2- TYPICAL REVERSE CHARACTERISTICS

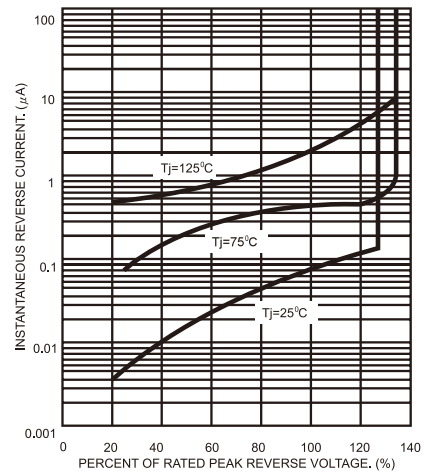


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

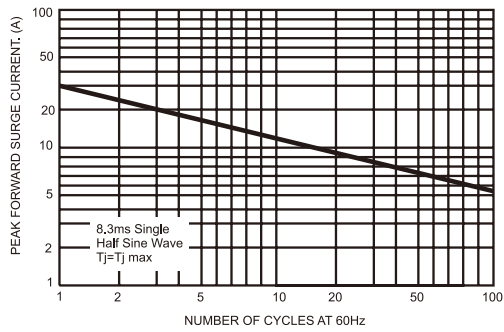


FIG.5- TYPICAL FORWARD CHARACTERISTICS

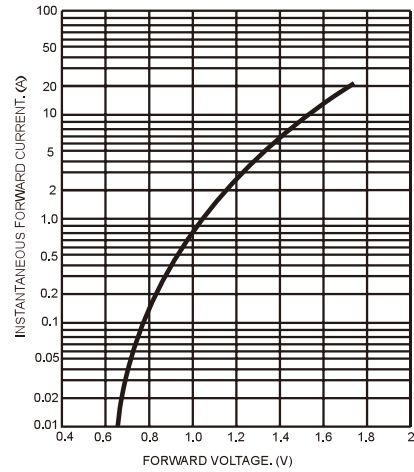


FIG.4- TYPICAL JUNCTION CAPACITANCE

