

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free




FEATURES

- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Super Low V_F & Low I_R

MECHANICAL DATA

- Case : Molded Plastic
- Epoxy : UL 94V-0 Rate Flame Retardant
- Metallurgically bonded construction
- Polarity : Color Band Denotes Cathode End
- Mounting Position: Any
- Weight : 1.10 grams

SMC



PACKAGE INFORMATION

Package	MPQ	Leader Size
SMC	3K	13 inch

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.75	3.15	E	-	0.203
B	6.60	7.11	F	7.75	8.13
C	5.59	6.22	G	0.76	1.27
D	2.00	2.62	H	0.15	0.31

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter		Symbol	Rating	Unit
Peak Repetitive Peak reverse voltage		V_{RRM}	40	V
Working Peak Reverse Voltage		V_{RWM}	40	V
Maximum DC Blocking Voltage		V_{DC}	40	V
Maximum Average Forward Current, See Fig. 1		I_F	3	A
Peak Forward Surge Current @ 8.3 ms Half Sine-Wave superimposed on rated load (JEDEC method)		I_{FSM}	90	
Maximum Instantaneous Forward Voltage @ $I_F = 3A$		V_F	0.42	V
Maximum DC Reverse Current At Rated DC Blocking Voltage ³	$T_A = 25^\circ C$	I_R	0.5	mA
	$T_A = 80^\circ C$		5	
Typical Thermal Resistance ²		$R_{\theta JC}$	12	$^\circ C / W$
Operating Temperature Range		T_J	-25~125	$^\circ C$
Storage temperature		T_{STG}	-55~150	$^\circ C$

Notes:


1. Thermal Resistance Junction to Case
2. Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2.0\%$.

CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

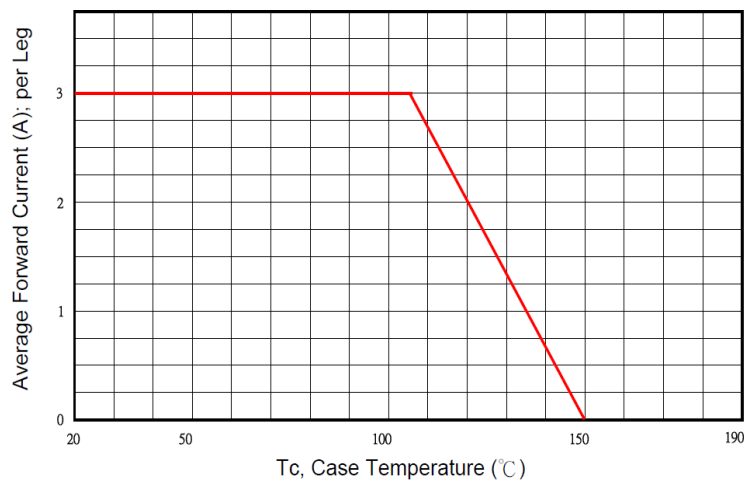


Typical Forward Characteristic

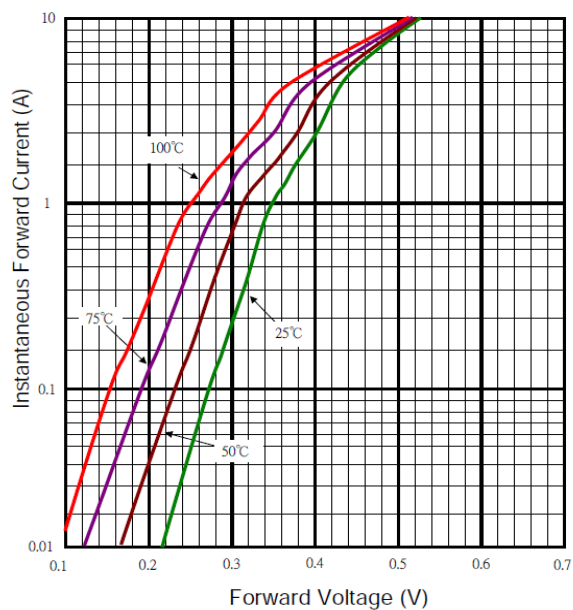

Typical Junction Capacitance

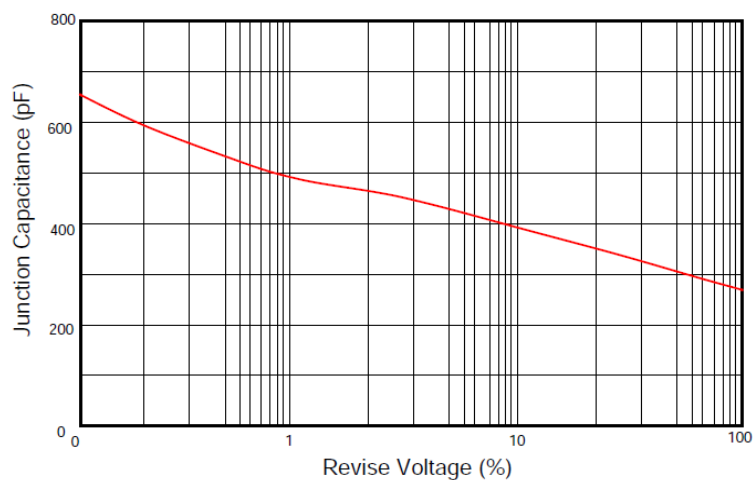

Typical Reverse Characteristic

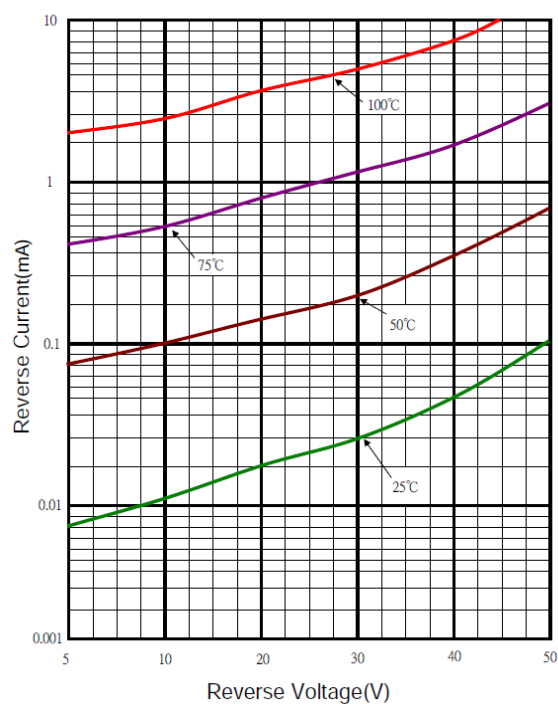

Maximum Non- Repetitive Forward Surge Current

