

LM1403/LM1403A Precision 2.50V Reference

General Description


The LM1403 is a precision, monolithic, temperature-compensated voltage reference. The LM1403 makes use of thin-film technology enhanced by the discrete laser trimming of resistors to achieve excellent Temperature coefficient (Tempco) of V_{OUT} (as low as 11 ppm/°C), along with tight initial tolerance, (as low as 0.02%). The trim scheme is such that individual resistors are cut open rather than being trimmed (partially cut), to avoid resistor drift caused by electromigration in the trimmed area. The LM1403 also provides excellent stability vs. changes in input voltage and output current. The output is current-limited and is short circuit proof.

Features

- Low cost
- Low 400 μ A operating current
- Low output impedance (0.15 Ω)
- Excellent line regulation (0.0001%/V typical)
- Single-supply operation
- Low temperature coefficient
- Excellent initial accuracy (0.05% typical)
- Excellent for low-voltage operation ($V_S = 5V$, $V_{REF} = 2.500V$)
- For tighter specs, refer to LM368-2.5

Connection Diagram

Dual-In-Line Package




TL/H/9757-1

Top View

Order Number LM1403N or LM1403AN
See NS Package Number N08E

Typical Applications

Low Voltage Reference



TL/H/9757-2

Absolute Maximum Ratings (Note 7)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Input Voltage	40V
Power Dissipation	600 mW
Output Short-Circuit Duration	Continuous

Storage Temperature Range	−60°C to +150°C
Operating Temperature Range	0°C to +70°C
Lead Temperature (Soldering, 10 sec.)	260°C
ESD rating to be determined.	

Electrical Characteristics (Note 1)

Parameter	Conditions	LM1403, LM1403A			
		Typical	Tested Limit (Note 2)	Design Limit (Note 3)	Units (Max. Unless Noted)
V _{OUT}		+2.500			V
V _{OUT} Error: LM1403 LM1403A		±0.05 ±0.04	±1.0 ±0.4		% %
Line Regulation	4.5V ≤ V _{IN} ≤ 40V	0.2	3		mV
Load Regulation (Note 8)	0 mA ≤ I _{SOURCE} ≤ 10 mA	1.5	10		mV
Thermal Regulation	T = 20 ms (Note 4)	±0.005	±0.02		%/100 mW
Quiescent Current	I _L = 0 mA	0.350	1.50		mA
Change of Quiescent Current vs. V _{IN}	5.0V ≤ V _{IN} ≤ 30V	3			μA/V
Temperature Coefficient of V _{OUT} (see graph): LM1403A (Note 5) LM1403	0°C ≤ T _A ≤ 70°C 0°C ≤ T _A ≤ 70°C	±11 ±15	±25	±40	ppm/°C ppm/°C
Short Circuit Current	V _{OUT} = 0	30	70	100	mA
Noise: 0.1 Hz–10 Hz 100 Hz–10 kHz		12 420			μVp-p nV/√Hz

Note 1: Unless otherwise noted, these specifications apply: T_A = 25°C, 4.9V ≤ V_{IN} ≤ 15.5V, 0 ≤ I_{LOAD} ≤ 0.5 mA, 0 ≤ C_L ≤ 200 pF.

Note 2: Tested Limits are guaranteed and 100% tested in production.

Note 3: Design Limits are guaranteed (but not 100% production tested) over the indicated temperature and supply voltage ranges. These limits are used to calculate outgoing quality levels.

Note 4: Thermal Regulation is defined as the change in the output Voltage at a time T after a step change in power dissipation of 100 mW.

Note 5: Temperature Coefficient of V_{OUT} is defined as the worst case delta-V_{OUT} measured at Specified Temperatures divided by the total span of the Specified Temperature Range (See graphs). There is no guarantee that the Specified Temperatures are exactly at the minimum or maximum deviation.


Note 6: Thermal Resistance is 160°C/W, junction to ambient, soldered into a PC board.

Note 7: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its Rated Operating Conditions (see Note 1 and Conditions).


Note 8: Load regulation is measured on the output pin at a point 1/4" below the base of the package. Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specification for thermal regulation.

Typical Performance Characteristics (Note 1)


Quiescent Current vs Input Voltage and Temperature




Dropout Voltage vs Output Current




Output Change vs Output Current



Output Impedance vs Frequency




Ripple Rejection vs Frequency




- (1) LM1403 as is.
(2) With 10Ω in series with 10 μF, V_{OUT} to GND.

Temperature Coefficient



Output Noise vs. Frequency




Typical Temperature Coefficient Calculations:
T.C. = 1.7 mV / (70° × 2.5V)
= 9.7 ppm/°C

TL/H/9757-3


Typical Applications

Improved Noise Performance



TL/H/9757-4


± 2.5V, ± 1.25V References

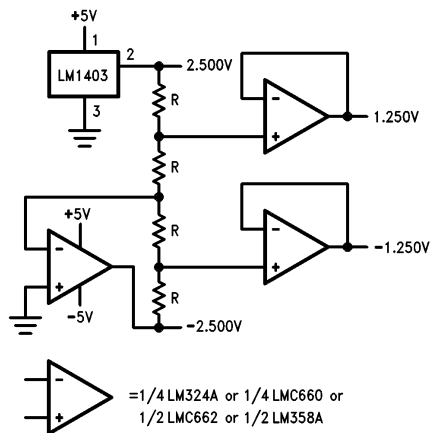

TL/H/9757-5


R = Thin Film Resistor Network,
± 0.05% Matching and 5 ppm Tracking
(Beckman 694-3-R-10K-A),
(Caddock T-914-10K-100-05)
or similar.

Multiple Output Voltages




TL/H/9757-6

R = Thin Film Resistor Network
0.05% Matching and 5 ppm Tracking
(Beckman 694-3-R-10K-A),
(Caddock T-914-10K-100-05)
or similar.

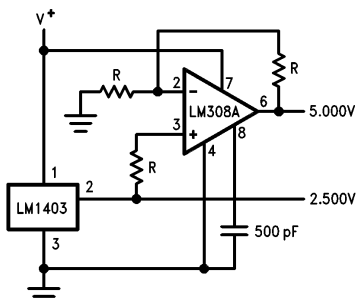


TL/H/9757-7

Reference with Booster

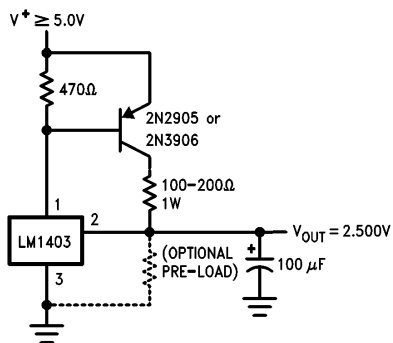

TL/H/9757-8


100 mA Boosted Reference

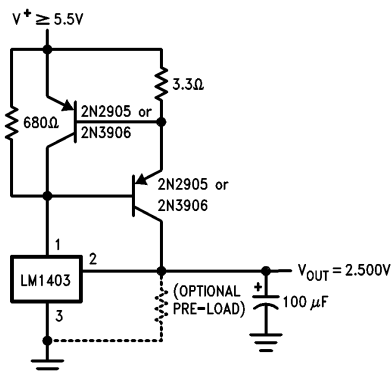

TL/H/9757-9


Typical Applications (Continued)

Buffered High-Current Reference with Filter

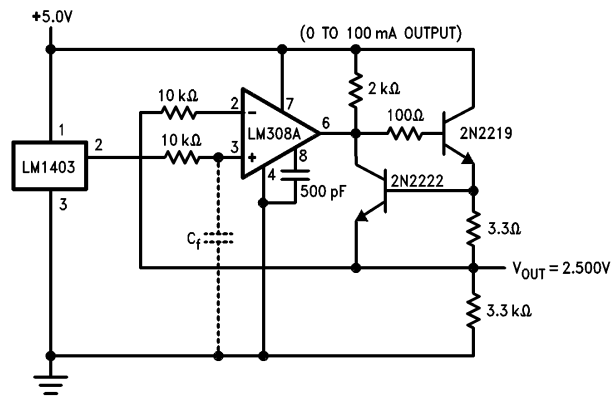

TL/H/9757-10

Simplified Schematic Diagram

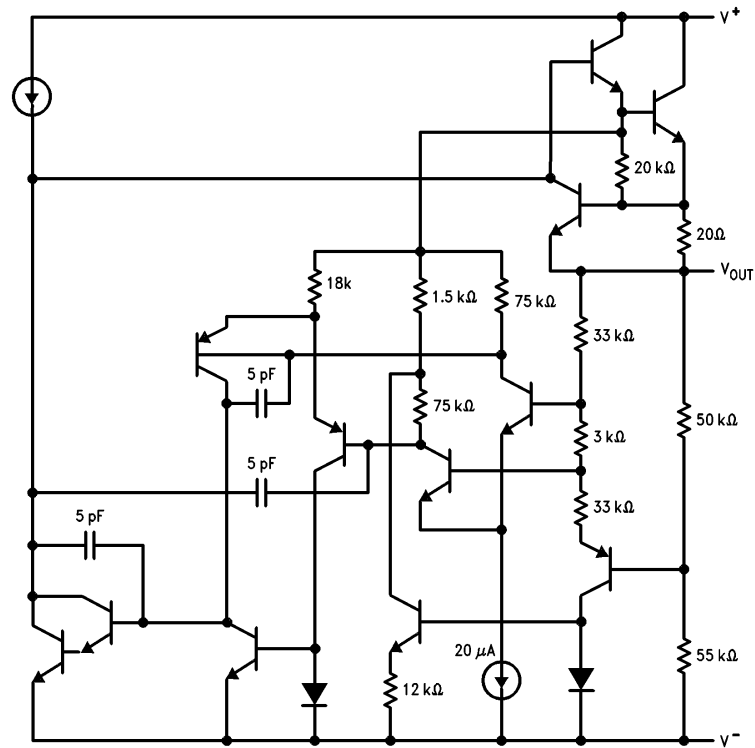


*Reg. U.S. Pat. Off.

TL/H/9757-11

Physical Dimensions inches (millimeters)

Lit. # 106560

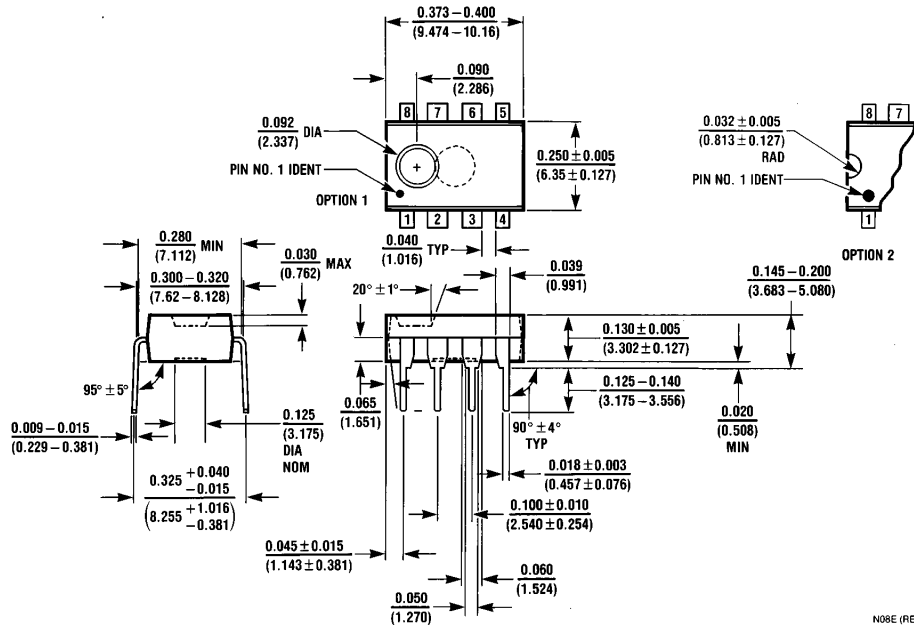

Plastic Dual-In-Line Package (N)
Order Number LM1403N or LM1403AN
NS Package Number N08E

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: cnjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 19th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.