


SMD Power Inductor CDRH15D78/A




RoHS



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 15.5 × 15.5 × 8.0 mm Max.
- Product weight :4.0g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Qualification to AEC-Q200.

Dimension - [mm]

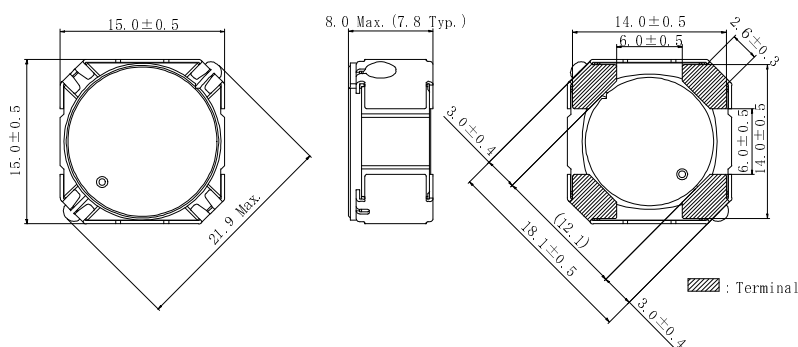

Environmental Data

- Operating temperature range: -40°C~+125°C
- Storage temperature range: -40°C~+85°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 14.5" diameter reel
- 500pcs per reel

Applications


- Automotive and other high temperature, high reliability application.

Land pattern and Schematics - [mm]

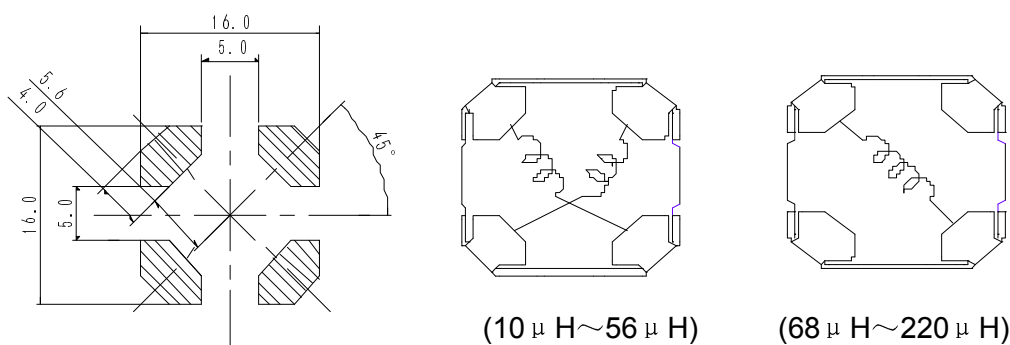

SMD Power Inductor

CDRH15D78/A



Electrical Characteristics

Part name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (m Ω) [Max.] (Typ.) (at 20°C)	Rated current (at 125°C) (A) ※2
CDRH15D78/ANP-100MC	100M	10 $\pm$ 20%	16.3(13)	5.38
CDRH15D78/ANP-120MC	120M	12 $\pm$ 20%	18.8(15)	4.42
CDRH15D78/ANP-150MC	150M	15 $\pm$ 20%	20.0(16)	4.14
CDRH15D78/ANP-180MC	180M	18 $\pm$ 20%	25.0(20)	3.90
CDRH15D78/ANP-220MC	220M	22 $\pm$ 20%	27.5(22)	3.55
CDRH15D78/ANP-270MC	270M	27 $\pm$ 20%	36.3(29)	3.20
CDRH15D78/ANP-330MC	330M	33 $\pm$ 20%	37.5(30)	2.75
CDRH15D78/ANP-390MC	390M	39 $\pm$ 20%	41.3(33)	2.68
CDRH15D78/ANP-470MC	470M	47 $\pm$ 20%	43.8(35)	2.52
CDRH15D78/ANP-560MC	560M	56 $\pm$ 20%	57.5(46)	2.26
CDRH15D78/ANP-680MC	680M	68 $\pm$ 20%	67.5(54)	2.05
CDRH15D78/ANP-820MC	820M	82 $\pm$ 20%	75.0(60)	1.87
CDRH15D78/ANP-101MC	101M	100 $\pm$ 20%	100.0(80)	1.70
CDRH15D78/ANP-121MC	121M	120 $\pm$ 20%	130.0(104)	1.55
CDRH15D78/ANP-151MC	151M	150 $\pm$ 20%	152.5(122)	1.38
CDRH15D78/ANP-181MC	181M	180 $\pm$ 20%	167.5(134)	1.28
CDRH15D78/ANP-221MC	221M	220 $\pm$ 20%	216.3(173)	1.17

※1. Measuring condition: at 100 kHz.













※2. Rated current: The DC current at which the inductance decreases to 65% of its nominal value or when $\Delta t=30^{\circ}\text{C}$, whichever is lower .

SMD Power Inductor CDRH15D78/A



Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) — ΔT

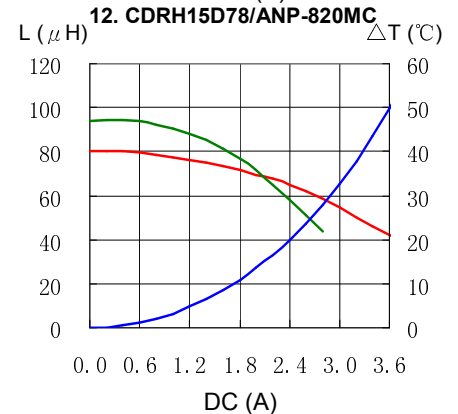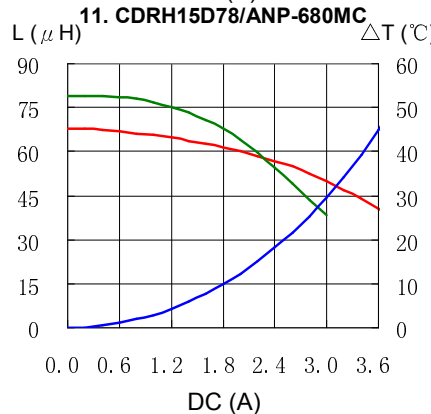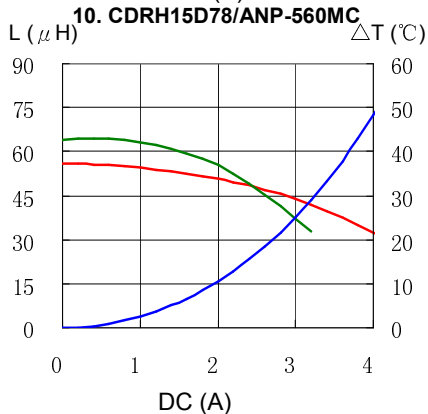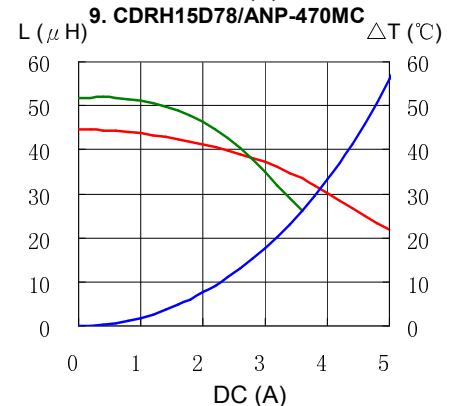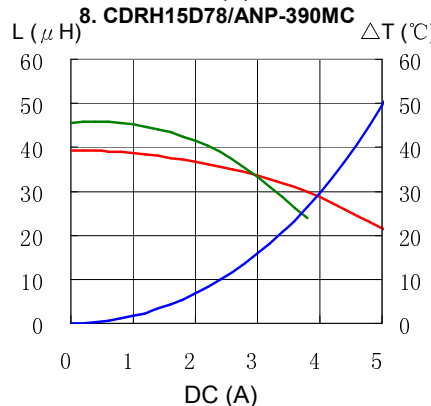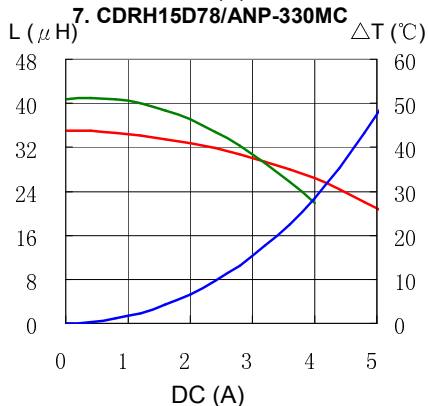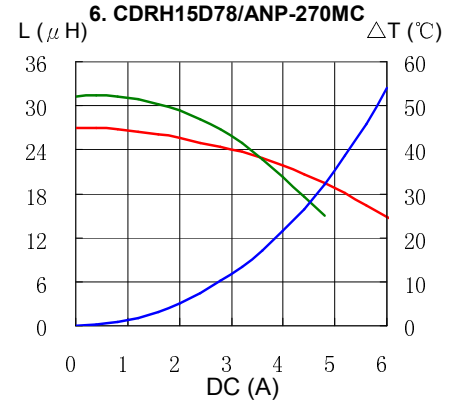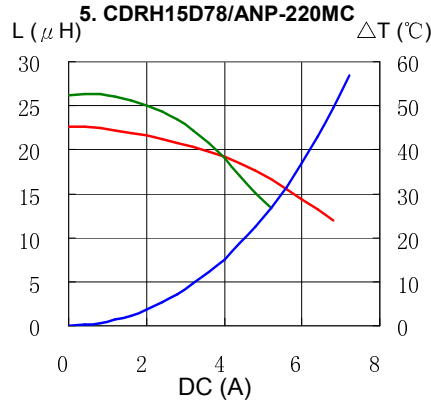
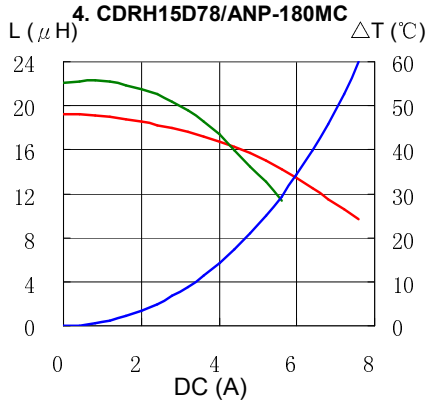
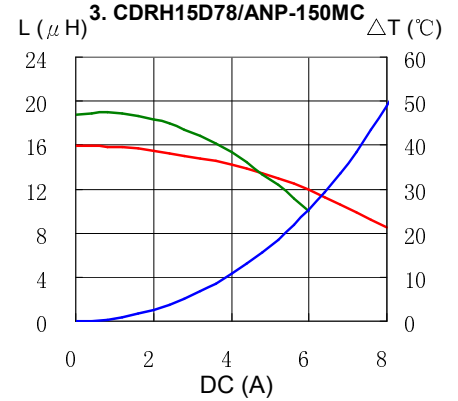
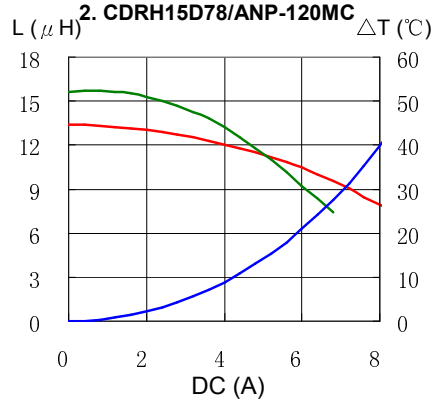
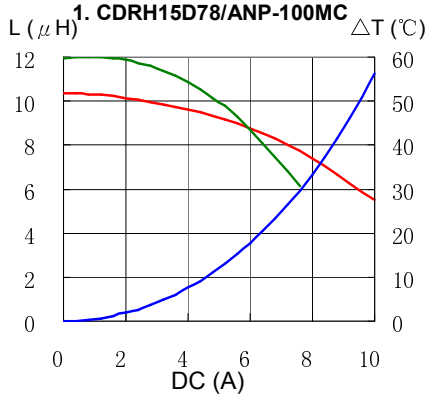


SMD Power Inductor CDRH15D78/A





Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) — ΔT

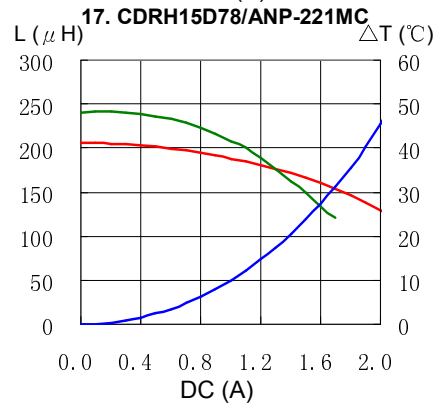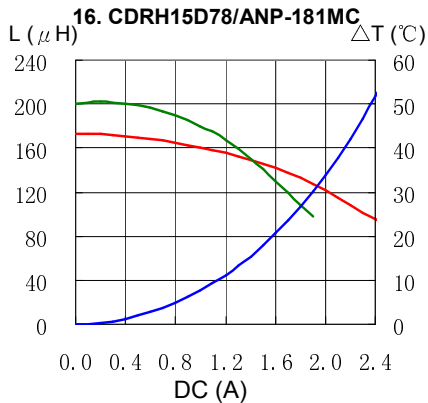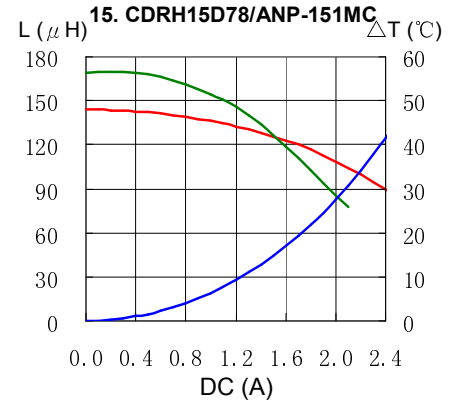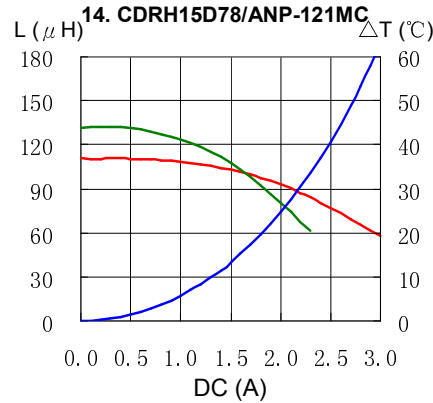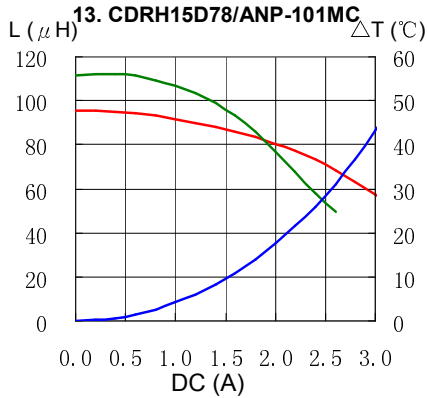

Solder Reflow Condition

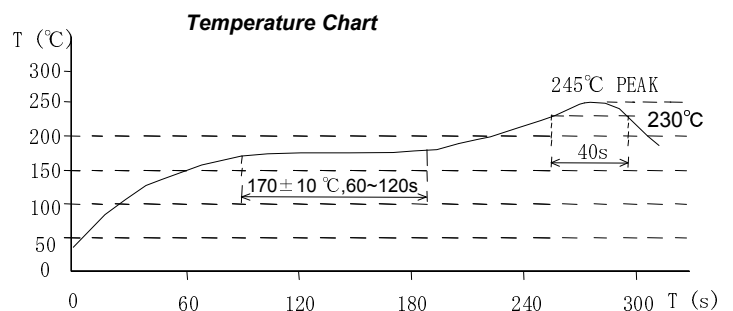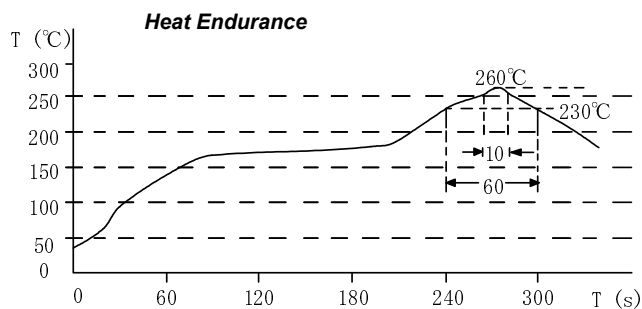

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
info@comp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-3219660
FAX. +1-408-321-9308
sales@us.sumida.com