

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- RoHS Compliant Product
- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- High surge current capability

MECHANICAL DATA

- Case: DO-214AC (SMA)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead Free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.062 grams (approximately)

SMA

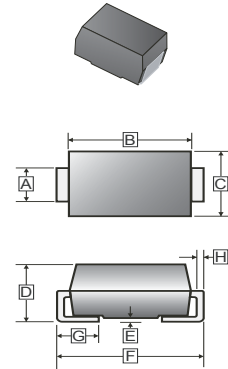

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.24	1.65	E	-	0.203
B	3.99	4.60	F	4.80	5.28
C	2.50	2.90	G	0.76	1.52
D	1.98	2.44	H	0.15	0.305

PACKAGE INFORMATION

Package	MPQ	Leader Size
SMA	5	7 inch

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%)

Parameter		Symbol	Part Number							Unit
			SM 4001A	SM 4002A	SM 4003A	SM 4004A	SM 4005A	SM 4006A	SM 4007A	
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage		V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage		V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current		I_F	1							A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load		I_{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A		V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_J=25^{\circ}C$	I_R	5							μA
	$T_J=100^{\circ}C$		50							
Typical Junction Capacitance ¹		C_J	15							pF
Typical Thermal Resistance		$R_{\theta JA}$	50							$^{\circ}C/W$
Operating & Storage Temperature		T_J, T_{STG}	-55~125, -55~150							$^{\circ}C$

Note:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
2. Thermal Resistance from Junction to Ambient.

RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CHARACTERISTICS

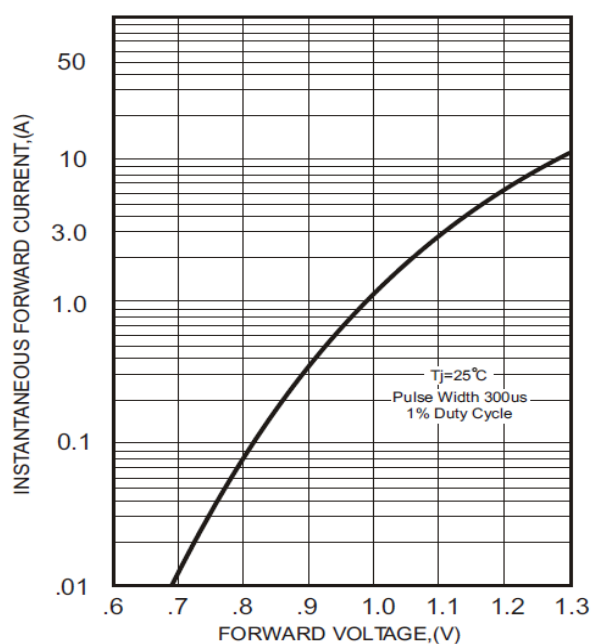


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

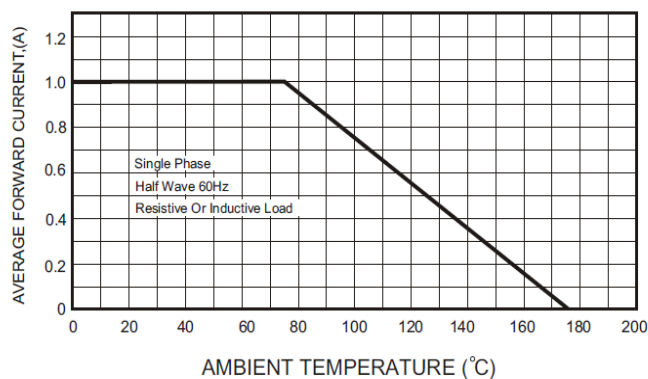


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

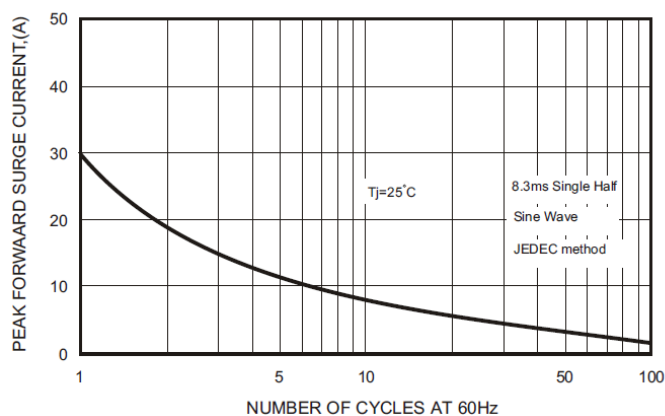


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

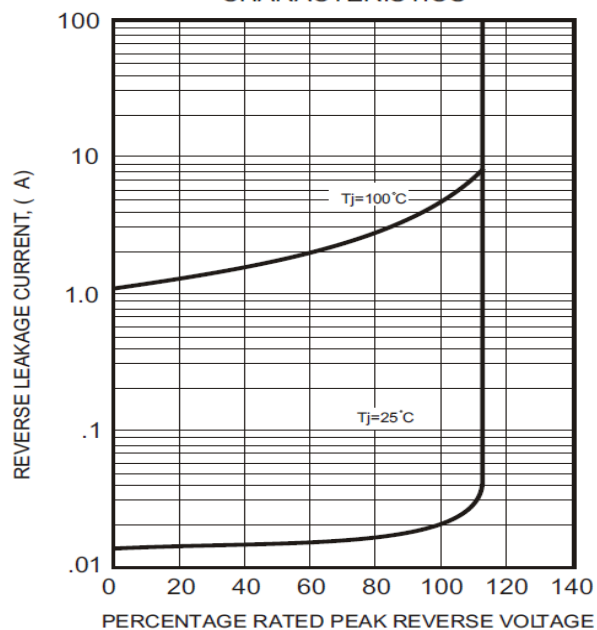


FIG.5-TYPICAL JUNCTION CAPACITANCE

