

## DS3686 Dual Positive Voltage Relay Driver

### General Description

The DS3686 is a high voltage/current positive voltage relay driver having many features not available in present relay drivers.

PNP inputs provide both TTL/LS compatibility and high input impedance for low input loading.

Output leakage is specified over temperature at an output voltage of 54V. Minimum output breakdown (ac/latch breakdown) is specified over temperature at 5 mA. This clearly defines the actual breakdown of the device since the circuit has incorporated in it an internal reference which does not allow output breakdown latching found in existing relay drivers. Additionally, this internal reference circuit feature will eliminate the need in most cases of an external clamping (inductive transient voltage protection) diode. When the output is turned "OFF" by input logic conditions the resulting inductive voltage transient seen at the output is detected by an internal zener reference. The reference then momentarily activates the output transistor long enough so that the relay energy is discharged. This feature eliminates the need of external circuit protection components and insures output transistor protection.

The outputs are Darlington connected transistors, which allow high current operation at low internal  $V_{CC}$  current

levels—base drive for the output transistor is obtained from the load in proportion to the required loading conditions. Typical  $V_{CC}$  power with both outputs "ON" is 90 mW.


The circuit also features output transistor protection if the  $V_{CC}$  supply is lost by forcing the output into the high impedance "OFF" state with the same breakdown levels as when  $V_{CC}$  was applied.

### Features

- TTL/LS/CMOS compatible inputs
- High impedance inputs (PNP's)
- High output voltage breakdown (65V typ)
- High output current capability (300 mA max)
- Internal protection circuit eliminates need for output protection diode
- Output breakdown protection if  $V_{CC}$  supply is lost
- Low  $V_{CC}$  power dissipation (90 mW (typ) both outputs "ON")
- Voltage and current levels compatible for use in telephone relay applications

DS3686 Dual Positive Voltage Relay Driver

### Connection Diagrams




Top View

TL/F/5822-1

Pin 4 is in electrical contact with the case

Order Number DS3686H  
See NS Package Number H08C

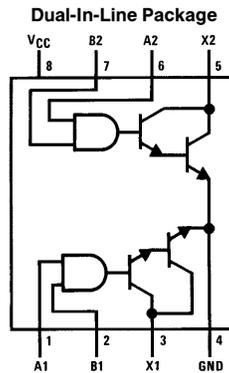

Top View

TL/F/5822-2

Order Number DS3686J-8 or DS3686N  
See NS Package Number J08A or N08E

### Truth Table

Positive logic:  $\overline{AB} = X$

A	B	Output X
0	0	1
1	0	1
0	1	1
1	1	0

Logic "0" output "ON"  
Logic "1" output "OFF"

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input Voltage	15V
Output Voltage	56V
Storage Temperature Range	-65°C to +150°C

Maximum Power Dissipation\* at 25°C

Cavity Package	1133 mW
Molded Package	1022 mW
TO-5 Package	787 mW

Lead Temperature (Soldering, 4 seconds) 260°C

\*Derate cavity package 7.6 mW/°C above 25°C; derate molded package 8.2 mW/°C above 25°C; derate TO-5 package 5.2 mW/°C above 25°C.

## Operating Conditions

	Min	Max	Units
Supply Voltage, $V_{CC}$	4.75	5.25	V
Temperature, $T_A$	0	±70	°C

## Electrical Characteristics (Notes 2 and 3)


Symbol	Parameter	Conditions	Min	Typ	Max	Units	
$V_{IH}$	Logical "1" Input Voltage	$R_L = 180\Omega$ , $V_L = 54V$ , $V_O \leq 2.5V$	2.0			V	
$I_{IH}$	Logical "1" Input Current	$V_{CC} = \text{Max}$ , $V_{IN} = 5.5V$		0.01	40	$\mu A$	
$V_{IL}$	Logical "0" Input Voltage	$R_L = 180\Omega$ , $V_L = 54V$ , $V_O \leq 53.8V$			0.8	V	
$I_{IL}$	Logical "0" Input Current	$V_{CC} = \text{Max}$ , $V_{IN} = 0.4V$		-150	-250	$\mu A$	
$V_{CD}$	Input Clamp Voltage	$V_{CC} = 5V$ , $I_{CLAMP} = -12 \text{ mA}$ , $T_A = 25^\circ C$		-1.0	-1.5	V	
$V_{OH}$	Output Breakdown	$V_{CC} = \text{Max}$ , $V_{IN} = 0V$ , $I_{OUT} = 5 \text{ mA}$	56	65		V	
$I_{OH}$	Output Leakage	$V_{CC} = \text{Max}$ , $V_{IN} = 0.4V$ , $V_{OUT} = 54V$		0.5	250	$\mu A$	
$V_{OL}$	Output ON Voltage	$V_{CC} = \text{Min}$ , $V_{IN} = 2.4V$	DS3686	$I_{OL} = 100 \text{ mA}$	0.85	1.0	V
				$I_{OL} = 300 \text{ mA}$	1.0	1.2	V
$I_{CC(1)}$	Supply Current (Both Drivers)	$V_{CC} = \text{Max}$ , $V_{IN} = 0V$ , Outputs Open		2	4	mA	
$I_{CC(0)}$	Supply Current (Both Drivers)	$V_{CC} = \text{Max}$ , $V_{IN} = 3V$ , Outputs Open		18	28	mA	
$t_{PD0}$	Propagation Delay to a Logical "0" (Output Turn ON)	$C_L = 15 \text{ pF}$ , $V_L = 10V$ , $R_L = 50\Omega$ $T_A = 25^\circ C$ , $V_{CC} = 5V$		50		ns	
$t_{PD1}$	Propagation Delay to a Logical "1" (Output Turn OFF)	$C_L = 15 \text{ pF}$ , $V_L = 10V$ , $R_L = 50\Omega$ $T_A = 25^\circ C$ , $V_{CC} = 5V$		1		$\mu s$	

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** Unless otherwise specified min/max limits apply across the 0°C to +70°C range for the DS3686. All typicals are given for  $V_{CC} = 5V$  and  $T_A = 25^\circ C$ .


**Note 3:** All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

## Schematic Diagram

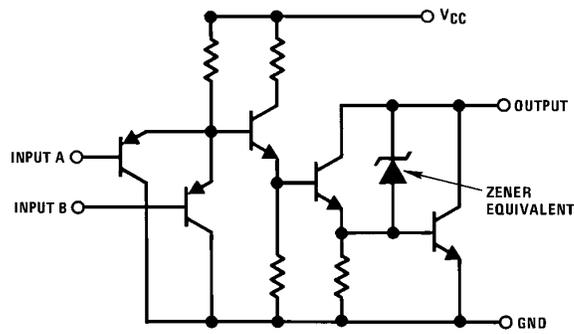

TL/F/5822-3


## AC Test Circuit and Switching Time Waveforms

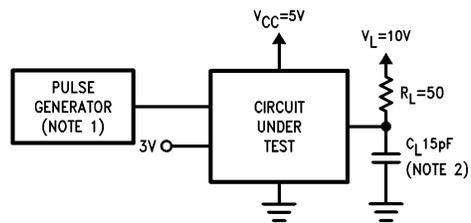

TL/F/5822-4

**Note 1:** The pulse generator has the following characteristics: PRR = 100 kHz, 50% duty cycle, Z<sub>OUT</sub> = 50 Ω, t<sub>r</sub> = t<sub>f</sub> ≤ 10 ns.


**Note 2:** C<sub>L</sub> includes probe and jig capacitance.

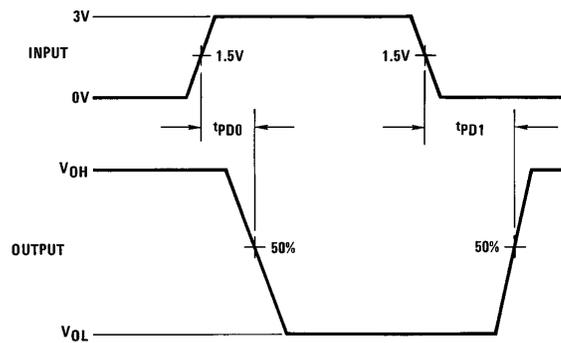

TL/F/5822-5




**Physical Dimensions** inches (millimeters) (Continued)

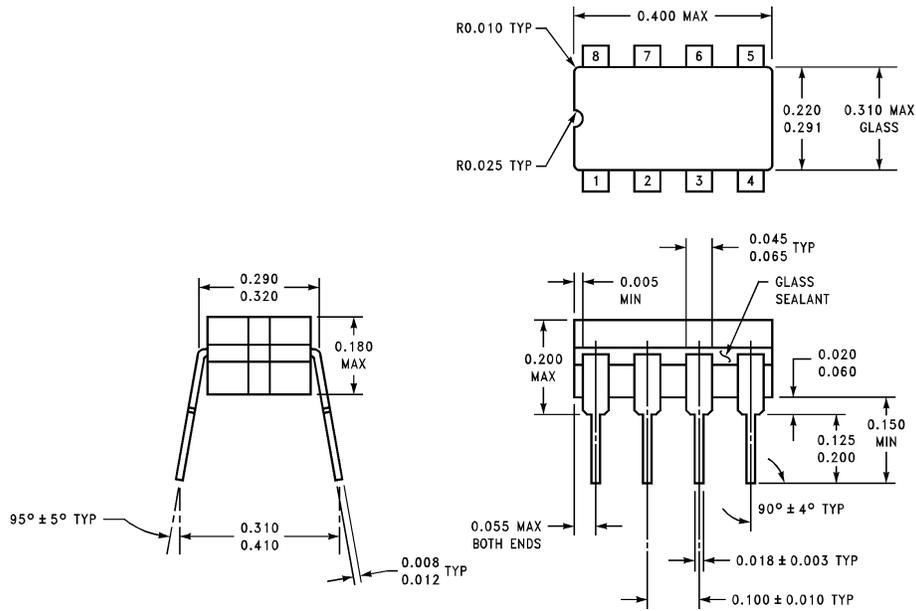

**Ceramic Dual-In-Line Package (J)**  
**Order Number DS3686J-8**  
**NS Package Number J08A**

J08A (REV K)

**Physical Dimensions** inches (millimeters) (Continued)

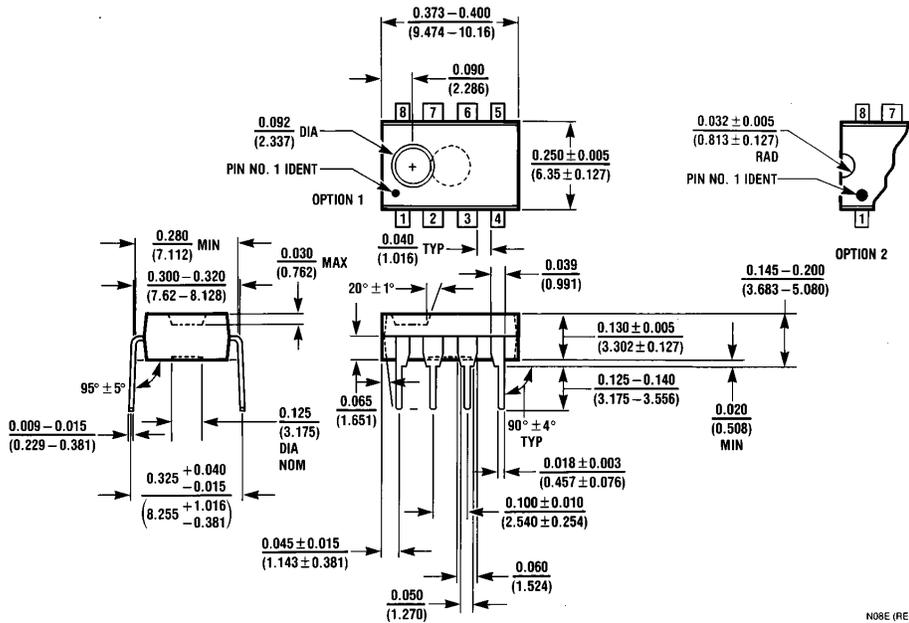

**Molded Dual-In-Line Package (N)**  
**Order Number DS3686N**  
**NS Package Number N08E**

N08E (REV F)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.