


25, 35A GLASS PASSIVATED THREE-PHASE BRIDGE RECTIFIER

Features

- Glass Passivated Die Construction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards
-  Recognized File # E157705

Mechanical Data

- Case: Epoxy Case with Heat Sink Internally Mounted in the Bridge Encapsulation
- Terminals: Plated Faston Lugs Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 21 grams (approx.)
- Mounting Position: Bolt Down on Heatsink With Silicone Thermal Compound Between Bridge and Mounting Surface for Maximum Heat Transfer Efficiency
- Mounting Torque: 23 cm·kg (20 in·lbs) Max.
- Marking: Type Number
- **Lead Free: For RoHS / Lead Free Version, Add "-LF" Suffix to Part Number, See Page 7**

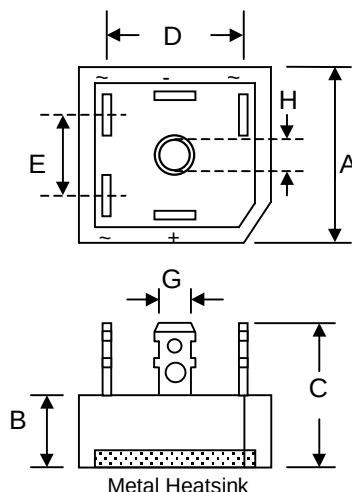

MT		
Dim	Min	Max
A	28.40	28.70
B	—	10.00
C	22.86	23.86
D	—	25.30
E	16.00 Typical	
G	6.35 x 0.80	
H	5.10 Ø	5.30 Ø
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Voltage Ratings

Characteristics	Symbol	MT25, 35										Unit
		00	01	02	04	06	08	10	12	14	16	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	50	100	200	400	600	800	1000	1200	1400	1600	V
Peak Non-Repetitive Reverse Voltage	V _{RSM}	75	150	275	500	725	900	1100	1300	1500	1700	V
RMS Reverse Voltage	V _{R(RMS)}	35	70	140	280	420	560	700	840	980	1120	V

Forward Conduction

Characteristic	Symbol	MT25	MT35	Unit
Average Rectified Output Current MT25 @ $T_c = 70^\circ\text{C}$, MT35 @ $T_c = 60^\circ\text{C}$	I_o	25	35	A
Non-Repetitive Peak Forward Surge Current (No Voltage Reapplied $t = 8.3\text{ms}$ at 60Hz) (No Voltage Reapplied $t = 10\text{ms}$ at 50Hz) (100% V_{RRM} Reapplied $t = 8.3\text{ms}$ at 60Hz) (100% V_{RRM} Reapplied $t = 8.3\text{ms}$ at 50Hz)	I_{FSM}	375 360 314 300	500 475 420 400	A
I^2t Rating for Fusing (No-Voltage Reapplied $t = 8.3\text{ms}$ at 60Hz) (No-Voltage Reapplied $t = 10\text{ms}$ at 50Hz) (100% V_{RRM} Reapplied $t = 8.3\text{ms}$ at 60Hz) (100% V_{RRM} Reapplied $t = 10\text{ms}$ at 50Hz)	I^2t	580 635 410 450	1030 1130 730 800	A^2s
Maximum Forward Voltage Drop @ $T_j = 25^\circ\text{C}$, @ $I_{FM} = 40\text{A}_{pk}$ per single junction	V_F	1.26	1.19	V
Peak Reverse Current (per leg) @ $T_j = 25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_j = 125^\circ\text{C}$	I_R	10 5.0		μA mA
RMS Isolation Voltage from Case to Lead	V_{iso}	2500		V

Thermal Characteristics

Thermal Resistance Junction to Case at DC Operation per Bridge	$R_{\theta JC}$	1.42	1.16	K/W
Thermal Resistance Case to Heatsink Mounting Surface, Smooth, Flat and Greased	$R_{\theta CS}$	0.2		K/W
Operating Temperature Range	T_j	-40 to +150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-40 to +150		$^\circ\text{C}$

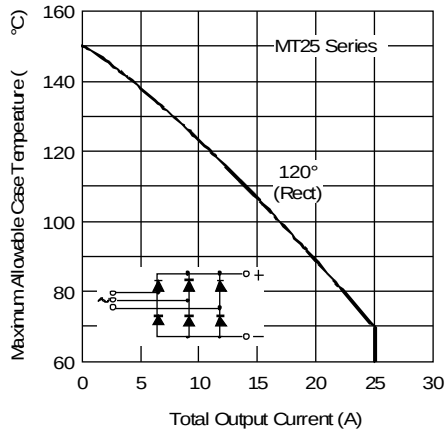


Fig. 1 - Current Ratings Characteristics

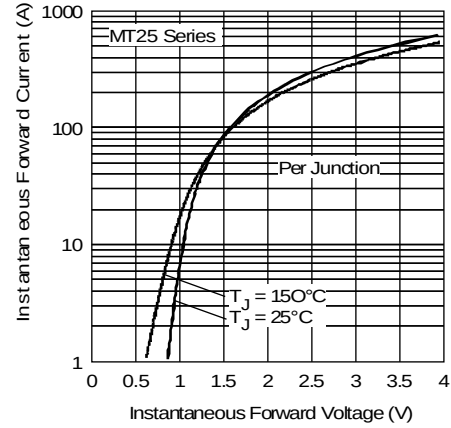


Fig. 2 - Forward Voltage Drop Characteristics

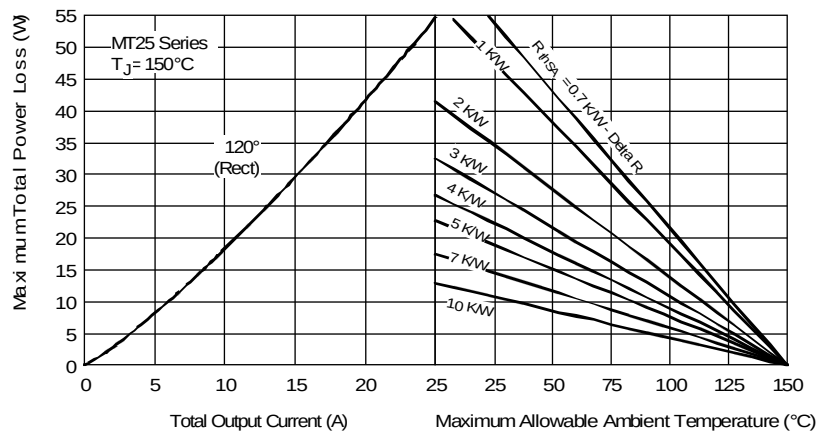


Fig. 3 - Total Power Loss Characteristics

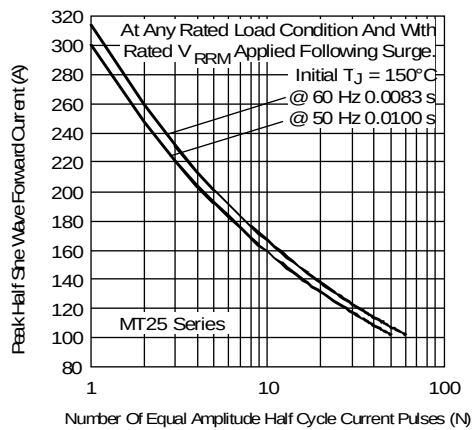


Fig. 4 - Maximum Non-Repetitive Surge Current

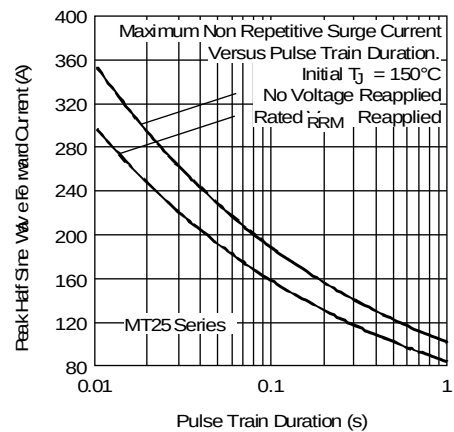


Fig. 5 - Maximum Non-Repetitive Surge Current

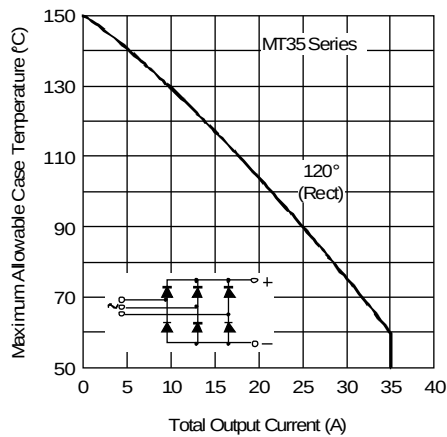


Fig. 6 - Current Ratings Characteristics

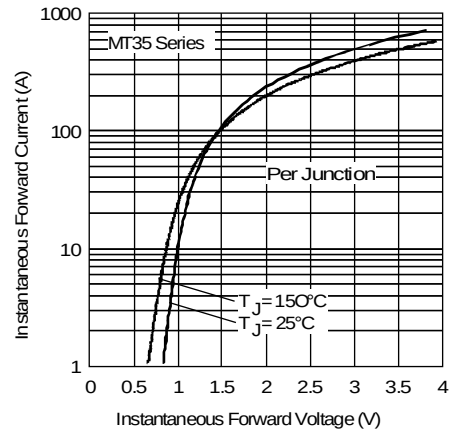


Fig. 7 - Forward Voltage Drop Characteristics

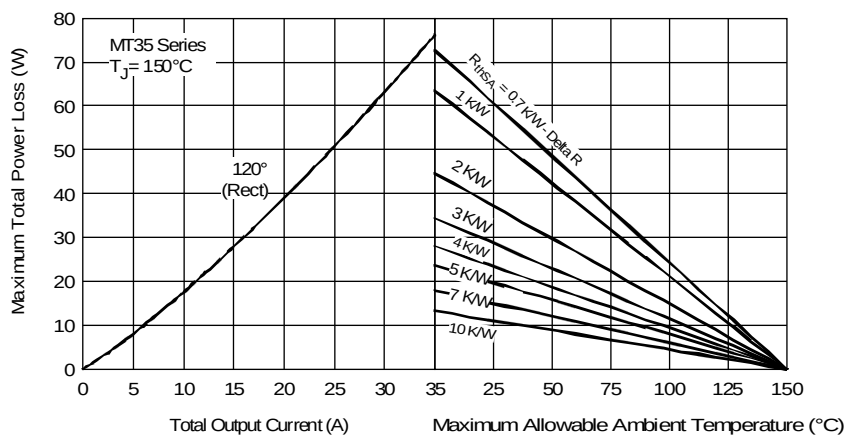


Fig. 8 - Total Power Loss Characteristics

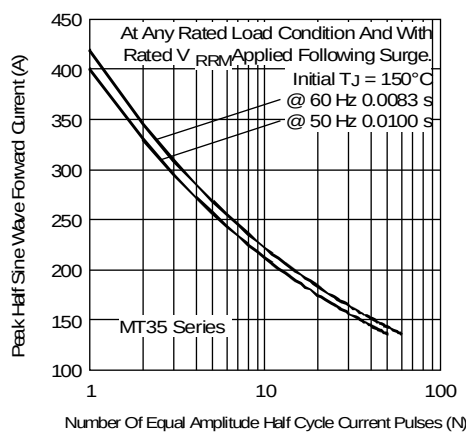


Fig. 9 - Maximum Non-Repetitive Surge Current

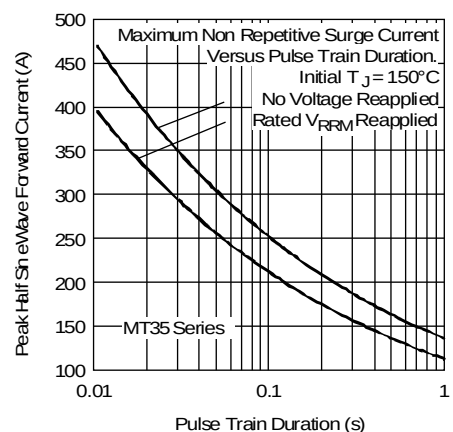


Fig. 10 - Maximum Non-Repetitive Surge Current

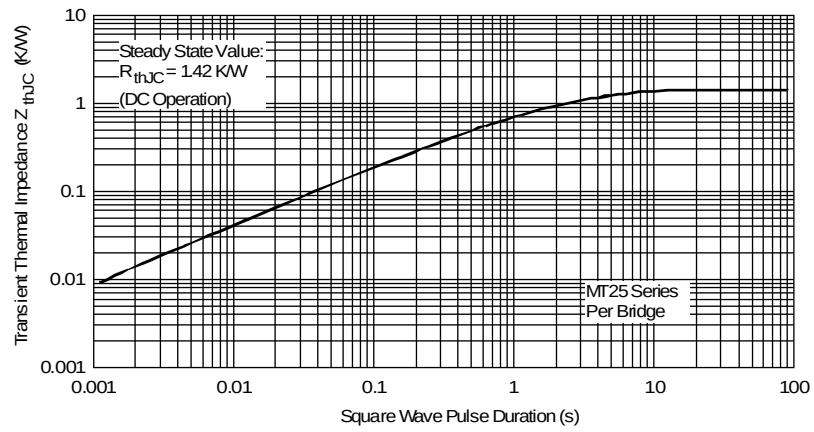


Fig. 11 - Thermal Impedance Z_{thJC} Characteristics



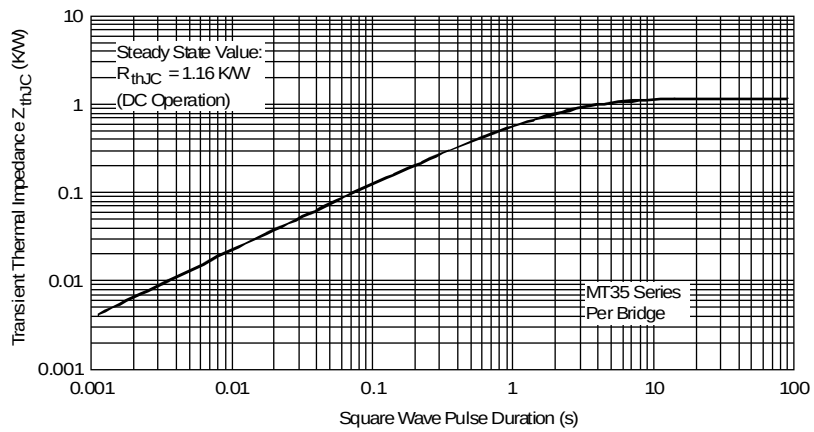


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics

MARKING INFORMATION



WTE = Manufacturer's Logo
MTxxyy = Device Number
xx = 25 or 35
yy = 00, 01, 02, 04, 06, 08, 10, 12, 14 or 16
Polarity = As Marked on Body

PACKAGING INFORMATION

BULK

Inner Box Size L x W x H (mm)	Quantity (PCS)	Carton Size L x W x H (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
195 x 195 x 40	50	405 x 205 x 240	500	12.0

Note: 1. Paper box, white or brown color.

ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity
MTxx00	Square Bridge	50 Units/Box
MTxx01	Square Bridge	50 Units/Box
MTxx02	Square Bridge	50 Units/Box
MTxx04	Square Bridge	50 Units/Box
MTxx06	Square Bridge	50 Units/Box
MTxx08	Square Bridge	50 Units/Box
MTxx10	Square Bridge	50 Units/Box
MTxx12	Square Bridge	50 Units/Box
MTxx14	Square Bridge	50 Units/Box
MTxx16	Square Bridge	50 Units/Box

1. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
2. **To order Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, MT2500-LF.**

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd.

No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan

Phone: 886-7-822-5408 or 886-7-822-5410

Fax: 886-7-822-5417

Email: sales@wontop.com

Internet: <http://www.wontop.com>

We power your everyday.