

MICRO

ELECTRONICS

SMC-E22E/
E30S-GNE

10mm,4 DIGIT
INDICATOR
DISPLAY

FEATURE

High Performance Green GaP Dice
10mm Character Height
High Contrast
Wide Viewing Angle
Common Anode

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

Power Dissipation /Segment	Pd	100mW
Peak Forward Current / Segment	I _F /Pulse*	200mA
Continuous Forward Current / Segment	I _F /DC	30mA
Reverse Voltage /Segment	V _R	5V
Operating Temperature Range	Topr	-20 to +80°C
Storage Temperature Range	Tstg	-25 to +85°C

*Note : Pulse Width=1mS , Duty Ratio=1/10 .

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	V _F		2.2	3.0	V	I _F =20mA
Luminous Intensity	I _V	1.0	1.3		mcd	I _F =10mA
Segment to Segment Luminous Intensity Ratio				2:1		I _F =20mA
Peak Wavelength	λ _p		565		nm	I _F =20mA
Spectral Line Half Width	Δλ		30		nm	I _F =20mA



MICRO ELECTRONICS LTD.


美科有限公司

7/F, Enterprise Square Three, 39 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong.
TEL: (852) 23430181 FAX: (852) 23410321
HOMEPAGE: <http://www.microelectr.com.hk>

REV : A
22/4/2005

SMC-E22E/E30S-GNE

MECHANICAL DIMENSIONS:

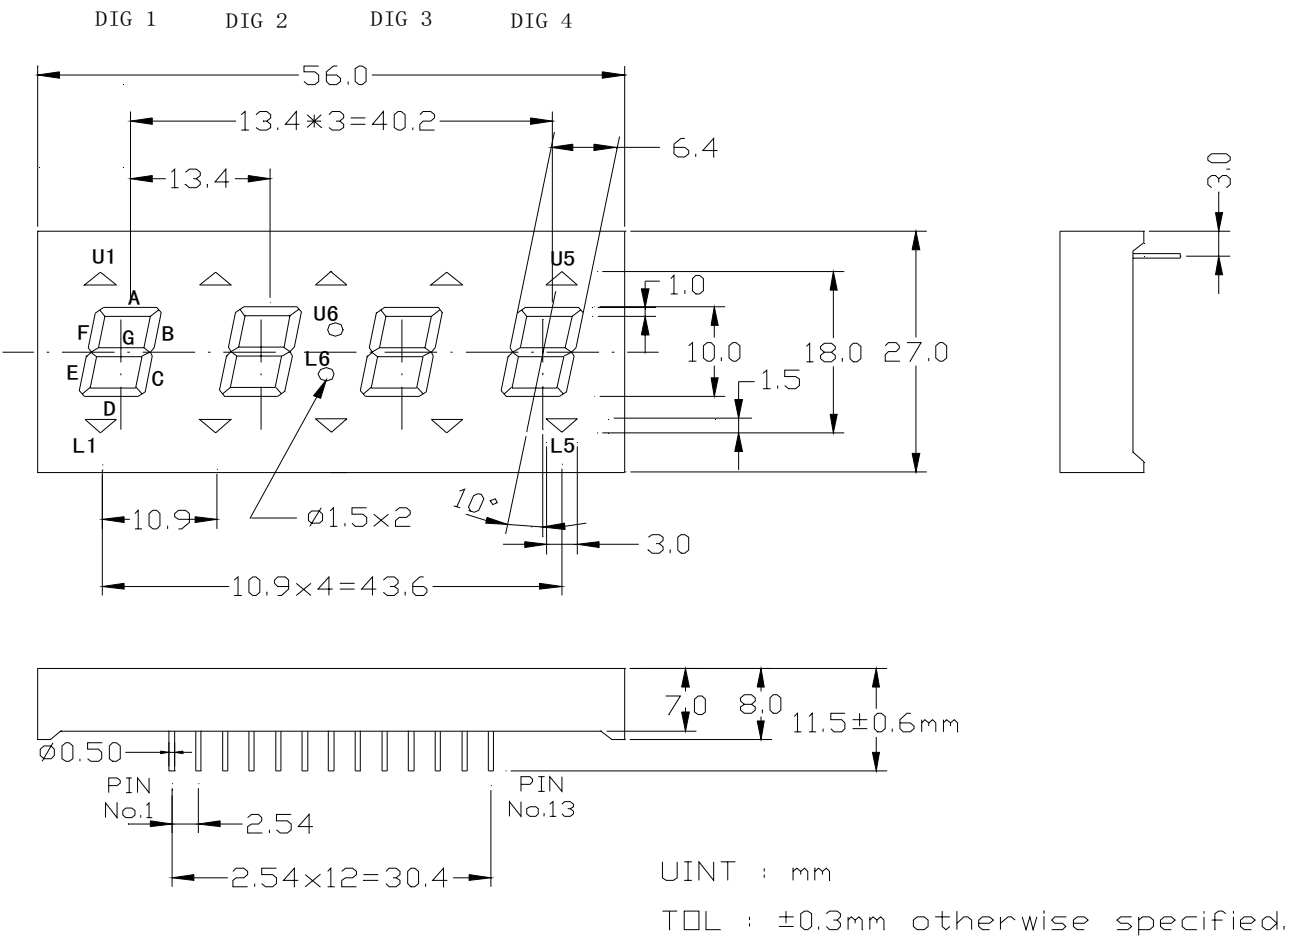

CIRCUIT DIAGRAM:

