


DB ELECTRO^{CO., LTD.}

Présente / Presents:

NINGBO HUAGUAN ELECTRONICS CO.,LTD.

NHG[®]





28.5×12.5×10.1



40019280



E160644



06001015741

NT74

Features

- Small size, lightweight.
- Low coil consumption.
- PC board mounting.
- Suitable for household electrical appliances, automation system, electrical equipment, instrument, meter telecommunication facilities and remote control facilities.

Ordering Information

NT74 1C S 10 DC12V N G
1 2 3 4 5 6 7

- 1 Part number:NT74
2 Contact arrangement:1A:1A;1C:1C;C2:1C2;
2A:2A;2B:2B;2C:2C
3 Enclosure:S: Sealed type; Z: Dust cover
4 Contact rating:1A,1C:8A,10A/250VAC 30VDC;
2A,2B,2C:5A/250VAC 30VDC
5 Coil rated voltage(V):DC:5,6,9,12,18,24,48,60
6 Contact material: N: AgNi; S:AgSnO₂
7 Contact plating: Nil:Standard; G:Gold plated

Contact Data

Contact Arrangement	1A (SPSTNO) 1C (SPDT(B-M)) 1C2 (SPDT(B-M)) 2A (DPSTNO) 2B(DPSTNC) 2C (DPDT(B-M))		
Contact Material	AgNi AgSnO ₂		
Contact Rating (resistive)	1A,1C,1C2:8A,10A/250VAC,30VDC 2A,2B,2C:5A/250VAC,30VDC		
Max. Switching Power	1A,1C,1C2:300W 2500VA 2A,2B,2C:150W 1250VA		
Max. Switching Voltage	440VAC 125VDC	Max. Switching Current:10A	
Contact Resistance or Voltage drop	<100mΩ		Item 3.12 of IEC255-7
Operational life	Electrical	10 ⁵	Item 3.30 of IEC255-7
	Mechanical	10 ⁷	Item 3.31 of IEC255-7

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ± 10%	Pickup voltage VDC(max) (70%of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
005-220	5	6.5	113	3.5	0.5	0.22	≤10	<5
006-220	6	7.8	164	4.2	0.6			
009-230	9	11.7	360	6.3	0.9	0.23	≤10	<5
012-230	12	15.6	620	8.4	1.2			
018-250	18	23.4	1295	12.7	1.8	0.25	≤10	<5
024-250	24	31.2	2350	16.8	2.4			
048-290	48	62.4	8000	33.6	4.8	0.29	≤10	<5
060-290	60	78	12500	42	6.0			

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition

Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC255-5
Dielectric Strength		
Between contacts	50Hz 1000V 1min	Item 6 of IEC255-5
Between contact and coil	50Hz 5000V 1min	Item 6 of IEC255-5
Between contact sets	50Hz 2500V 1min	Item 6 of IEC255-5
Shock resistance	functional: 980m/s ² survival: NO:98m/s ² NC:49m/s ²	IEC68-2-27 Test Ea
Vibration resistance	10~55Hz double amplitude NO: 1.65mm (no coil voltage) NC: 0.8mm	IEC68-2-6 Test Fc
Terminals strength	10N	IEC68-2-21 Test Ua1
Solderability	235℃ ± 2℃ 3 ± 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-40℃~85℃	
Relative Humidity	35%~85% (at 40℃)	IEC68-2-3 Test Ca
Mass	8g	

Qualification inspection:


Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

Safety approvals

Safety approval	UL&CUR	VDE
Load	1A,1C,1C2:8A,10A/250VAC,30VDC 2A,2C:5A/250VAC,30VDC	8A/250VAC

Dimensions

mm /inch

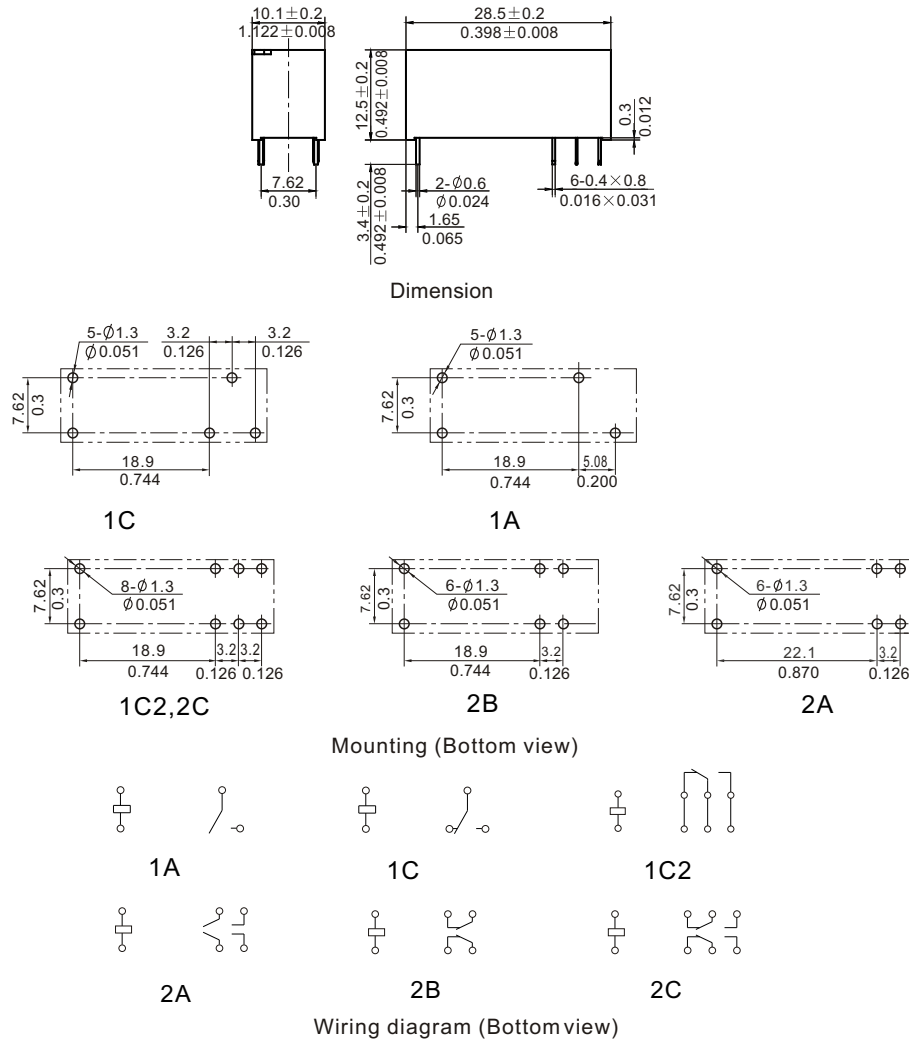

NOTES 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.