

SMD Schottky Barrier Rectifiers




CDBB120-G Thru CDBB1100-G

Reverse Voltage: 20 - 100 Volts

Forward Current: 1.0 Amp

RoHS Device



Features


- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- Low forward voltage drop

Mechanical Data

Case: JEDEC DO-214AA molded plastic
Terminals: solderable per MIL-STD-750, method 2026

Polarity: Color band denotes cathode end

Approx. Weight: 0.093 gram

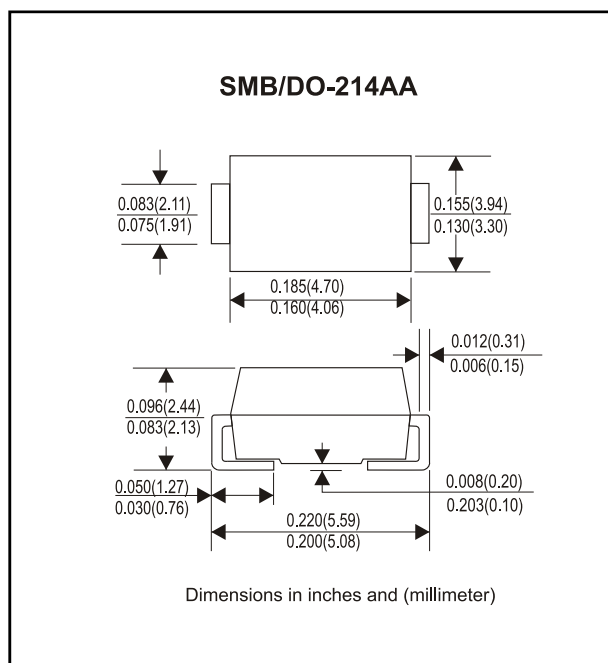

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBB120-G	CDBB140-G	CDBB160-G	CDBB180-G	CDBB1100-G	Unit
Max. Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	V
Max. DC Blocking Voltage	V _{DC}	20	40	60	80	100	V
Max. RMS Voltage	V _{RMS}	14	28	42	56	70	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I _{FSM}	30					A
Max. Average Forward Current	I _o	1.0					A
Max. Instantaneous Forward Current at 1.0 A	V _F	0.50		0.70	0.85		V
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C Ta=100°C	I _R	0.5					mA
		10					
Max. Thermal Resistance (Note 1)	R _{θJA}	75					°C/W
	R _{θJL}	17					
Max. Operating Junction Temperature	T _j	125					°C
Storage Temperature	T _{STG}	- 65 to + 150					°C

Note 1: Thermal resistance from junction to ambient and junction to to lead P.C.B. Mounted on 0.2 x 0.2 inch² copper pad areas

Rev. A

Rating and Characteristic Curves (CDBB120-G Thru CDBB1100-G)

Fig. 1 - Reverse Characteristics

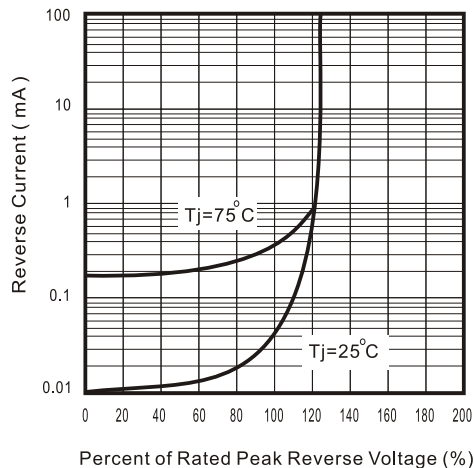


Fig.2 - Forward Characteristics

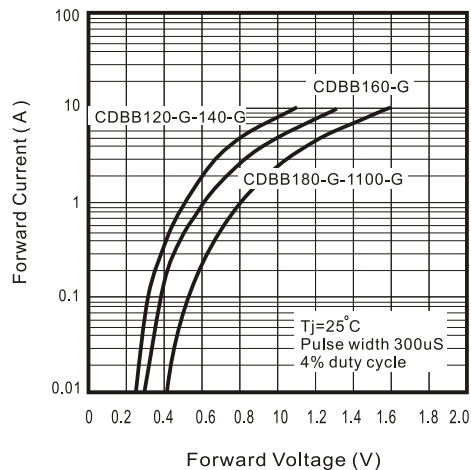


Fig. 3 - Junction Capacitance

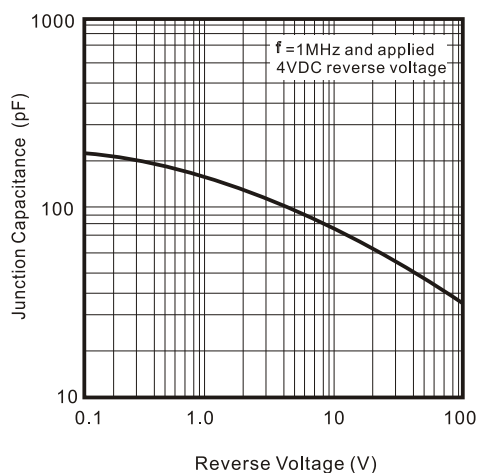


Fig. 4 - Current Derating Curve

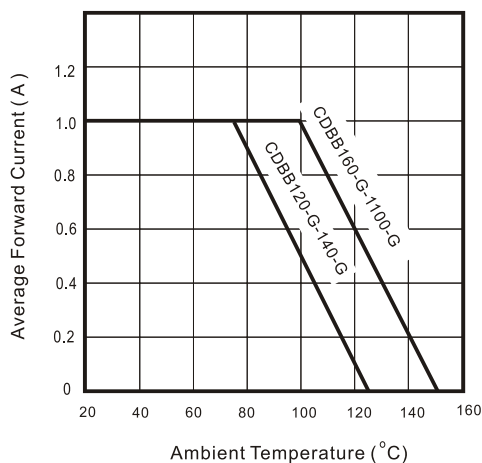


Fig. 5 - Non repetitive forward surge current

