

20 Amp Subminiature PCB Power Relay

PC420



FEATURES

- 20 A at 125 VAC and 10 amp at 250 VAC contact rating
- 1 1/2 HP at 125 VAC and 250 VAC
- TV8 rated at 125 VAC
- Class "B" insulation standard
- Class "F" insulation available
- Very economically priced
- Sealed, immersion cleanable



E93379

UL/CUR RATINGS

Contact	Normally Open Contact	Normally Closed Contact
Inductive Load	1 HP at 125 & 250 VAC	1/2 HP at 125 & 250 VAC
Resistive Load	20A @ 125VAC 100K Cycles	20A @ 125VAC 30K Cycles
Tungsten Load	TV-8	NA
General Purpose	20 A/125 VAC, 10 A/250 VAC, 6 A/277 VAC All Contacts	

CONTACT DATA

Material	AgCdO (Silver Cadmium Oxide)	
Initial Contact Resistance	100 milliohms max @ 0.1A, 6VDC	
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	1 X 10 ⁵ Operations

CHARACTERISTICS

Operate Time	15 ms. Max.
Release Time	5 ms. Max.
Insulation Resistance	1,000 megohms min, at 500VDC, 50%RH
Dielectric Strength	4000 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
Shock Resistance	10 g, 11ms, functional; 100 g, destructive
Vibration Resistance	DA 1.5 mm, 10 - 55 Hz
Power Consumption	.36 W
Ambient Temperature Range	-40 to 85 C operating for class B, -40 to 130 C storage
Weight	13 grams approx.

ORDERING INFORMATION




Example:	PC420	-1A	-12	S	F	G
Model						
Contact Form						
1A, 1B, 1C						
Coil Voltage						
Enclosure						
S: Sealed; C: Dust Cover						
Insulation System						
Nil: Class B, F: Class F						
Contact Material						
Nil: AgCdO, T: AgSnO, G: AgCdO + Gold Plate						

COIL DATA

Coil Voltage	Resistance ohms $\pm 10\%$	Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)	Continuous Voltage Max. (VDC)
3	25	2.1	0.3	3.9
5	70	3.5	0.5	6.5
6	100	4.2	0.6	7.8
9	225	6.3	0.9	11.7
12	400	8.4	1.2	15.6
24	1600	16.8	2.4	31.2
48	6400	33.6	4.8	62.4

Note: Custom coil voltages within the ranges shown are available on special order.

Dimensions in Inches (millimeters)

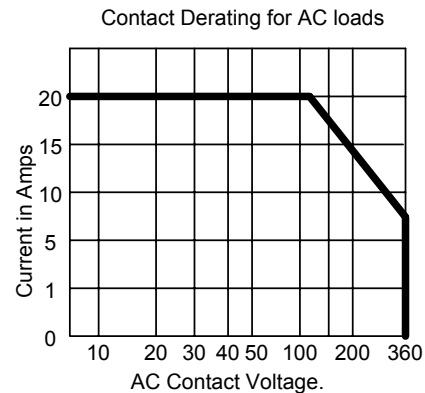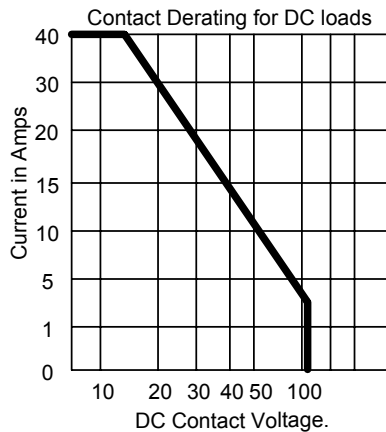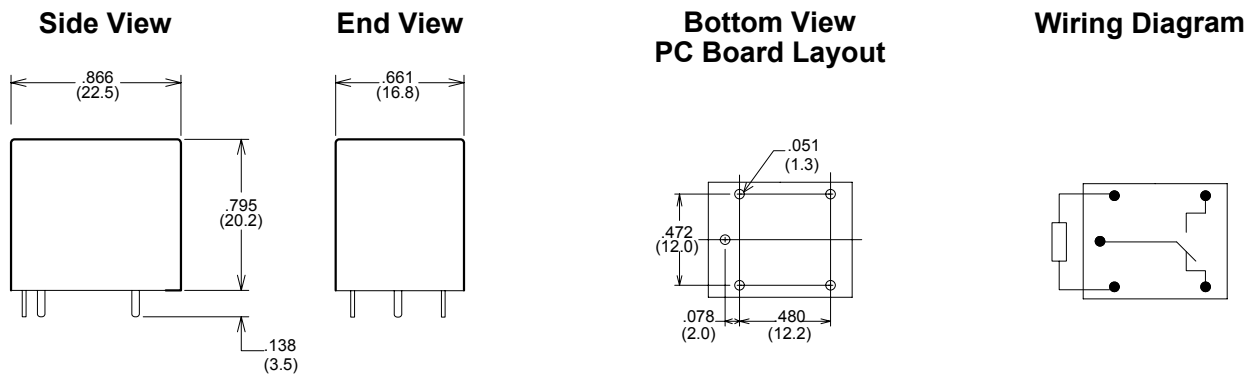

Notes:
 Contact Form C shown
 On Contact Forms A & B Unused Pins are Omitted
 Tolerances $\pm .010$ unless otherwise noted

PICKER
 COMPONENTS

3220 Commander Drive, Suite 102, Carrollton, Texas 75006

Sales: Call Toll Free (888) 997-3933 Fax (818) 342-5296 email: pickerwest@sbcglobal.net URL: pickercomponents.com