


FEATURES

- 2 Year Warranty
- Class I Insulation
- Internal EMI Filter
- 2-pin Input Connector
- Power Factor Correction
- Synchronous Rectification
- Power Fail Detect (Optional)
- Over Voltage Protection (Crowbar Design)
- Input Surge Current and Over Load Protection
- Output Voltage Available from 9VDC thru 48VDC
- 3-pin Input Connector Available (See PSSBU150 Series)



SPECIFICATIONS: PSSBU151 Series

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Nom	Max	Unit
INPUT (V _{in})					
Operating Voltage Range		90		264	VAC
Input Frequency		47		63	Hz
Input Current (Low Line)	I _o = Full Load, V _{in} = 115VAC			2.0	A
Input Current (High Line)	I _o = Full Load, V _{in} = 230VAC			0.8	A
Inrush Current (Low Line)	I _o = Full Load, 25°C, Cool Start, V _{in} = 115VAC		12	15	A
Inrush Current (High Line)	I _o = Full Load, 25°C, Cool Start, V _{in} = 230VAC		26	30	A
Safety Ground Leakage Current	I _o = Full Load, V _{in} = 240VAC		0.4	0.75	mA
Start-Up Time	I _o = Full Load, V _{in} = 100VAC	0.3	1	2	s
OUTPUT (V _o)					
Output Voltage Range		See Rating Chart			
Load Regulation	V _{in} = 230VAC		3	5	%
Line Regulation	I _o = Full Load		0.5	1	%
Output Power	V _{in} = 90 to 264VAC			150	W
Output Current Range		See Rating Chart			
Ripple & Noise (peak to peak)	Full Load, V _{in} = 90VAC		0.5	1	%
Transient Response	I _o = Full Load to Half Load, V _{in} = 100VAC			4	ms
Hold-Up Time	I _o = Full Load, V _{in} = 110VAC	16			ms
PROTECTION					
Over Voltage Protection		112		132	%
Over Current Protection		110		150	%
GENERAL					
Efficiency	I _o = Full Load, V _{in} = 230VAC	85	88	90	%
Dielectric Withstanding Voltage For Primary to Secondary	Primary to Secondary	4242			VDC
Dielectric Withstanding Voltage For Primary to Ground	Primary to Ground	2121			VDC
Isolation Resistance	Test Voltage = 500VDC	50			MΩ
Power Factor Correction	I _o = Full Load, V _{in} = 90~260VAC	0.95	0.97	1.0	
ENVIRONMENTAL					
Operating Temperature	Derate linearly from 100% Load at 50°C to 50% load at 70°C	0		+70	°C
Storage Temperature		-40		+85	°C
Relative Humidity		5		95	%
Temperature Coefficient	All Outputs	-0.04		+0.04	%/°C
PHYSICAL					
Weight		Approximately 390 grams			
Dimensions		127(L) x 76.2(W) x 35.56(H) mm			
Warranty		2 years			
SAFETY					
EMI Requirements for CISPR-22	V _{in} = 220VAC	B			Class
EMI Requirements for FCC PART-15	V _{in} = 110VAC	B			Class



Wall Industries, Inc.

PSSBU151 Series
2-pin Input Connector
150 Watt Single Output
AC/DC Open Frame Power Supply for I.T.E.


OUTPUT VOLTAGE / CURRENT RATING CHART

Model Number	Preset Voltage	Output Current	Total Regulation	Maximum Output Power
PSSBU151-104	9 VDC	16.0 A	5%	144 W
PSSBU151-105	12 VDC	12.5 A	5%	150 W
PSSBU151-106	15 VDC	10.0 A	5%	150 W
PSSBU151-107	18 VDC	8.33 A	4%	150 W
PSSBU151-108	24 VDC	6.25 A	3%	150 W
PSSBU151-109	30 VDC	5.00 A	2%	150 W
PSSBU151-110	36 VDC	4.17 A	2%	150 W
PSSBU151-111	48 VDC	3.13 A	2%	150 W

NOTES

1. Mechanical Drawing: Dimensions are shown in inches or mm.
2. Weight of the unit is approximately 390 grams.
3. Input connector mates with Molex housing 09-50-3031 and Molex 2478 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3131 and Molex 2478 series crimp terminal.
5. 3 pin input connector available: See PSSBU150 Series.

MECHANICAL DRAWING

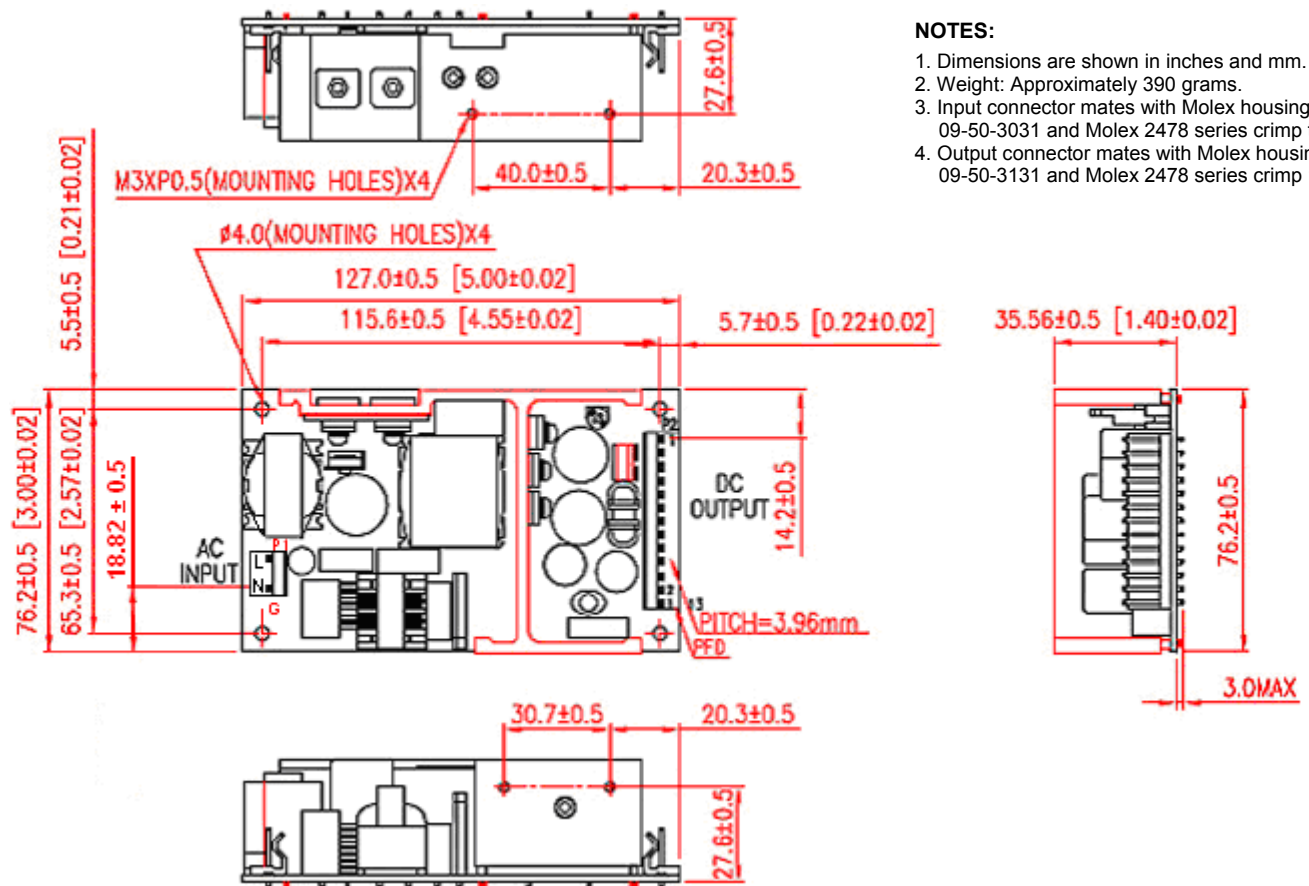

NOTES:

1. Dimensions are shown in inches and mm.
2. Weight: Approximately 390 grams.
3. Input connector mates with Molex housing 09-50-3031 and Molex 2478 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3131 and Molex 2478 series crimp terminal.

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13 (Optional)
PSSBU151-1XX	OUT	OUT	OUT	OUT	OUT	OUT	RTN	RTN	RTN	RTN	RTN	RTN	RTN