

F





E

D

C

B

A

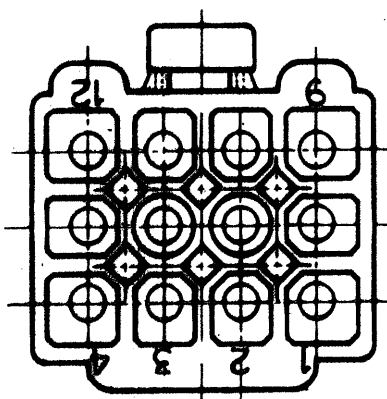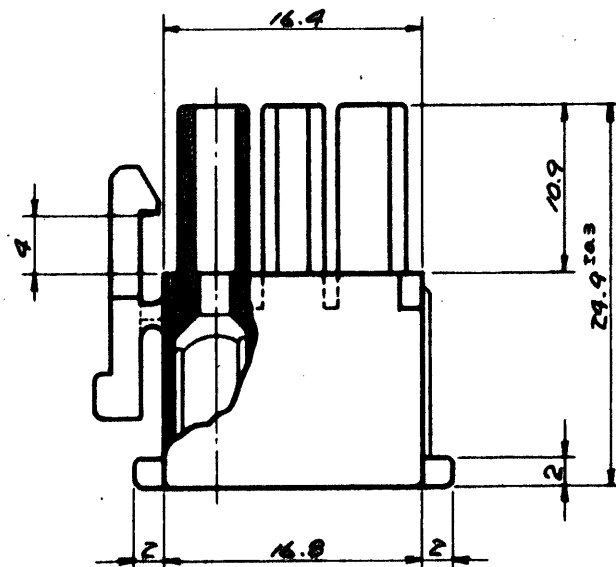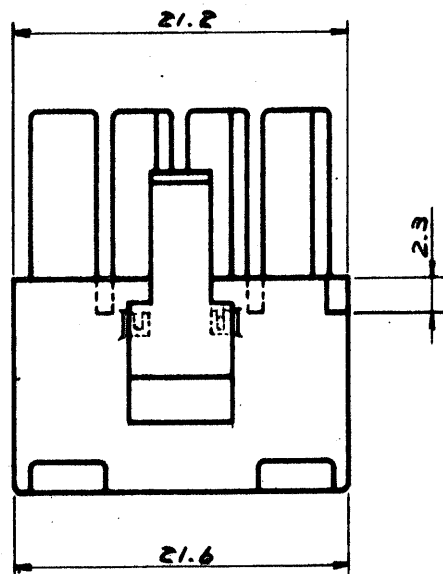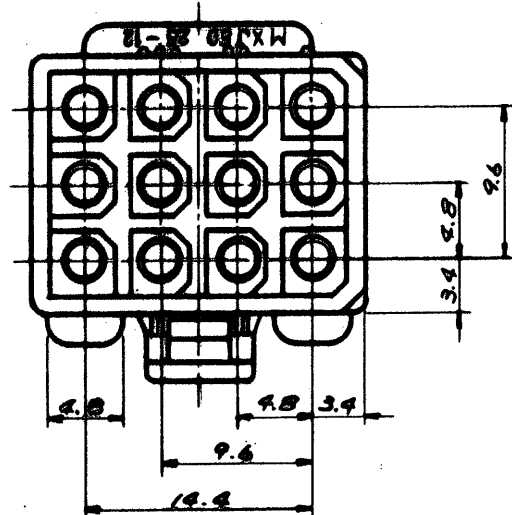

GENERAL TOLERANCES	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±5°

				公差 (Tolerances)		所要数		DRWG. <i>G. Amano</i> '9/17	
				.000 → ±0.005 .00 → ±0.05		(Req)		DSN'D <i>MEMO</i> '9/17	
				.0 → ±0.1 . → ±0.3		★		CHK'D <i>MEMO</i> '9/17	
				材料 (MAT'L)				APP'D	
D				NYLON 66, 94V-2		MOLEX-JAPAN CO., LTD.			
C				熱処理 (H.T.)		日本モレックス株式会社			
B ₁				HRc					
B				仕上げ (Finish)		No.		REV	
A						SD-5025-12R1		D	
O				Scale		名称 (Name)		MINI. FIT CONN.	
記号 (LTR)				変更内容 (Rev.)		Date		12POS. RECEPTACLE HSG.	

5

4

3

2

1

F





E

D

C

B

A

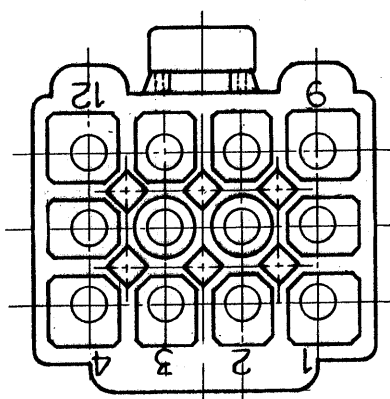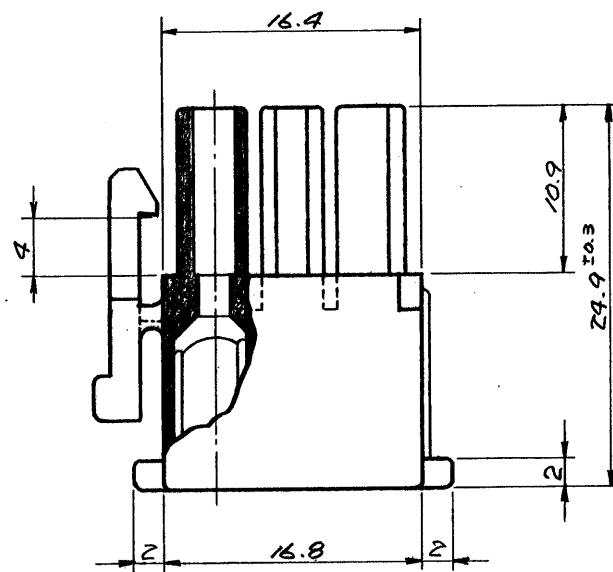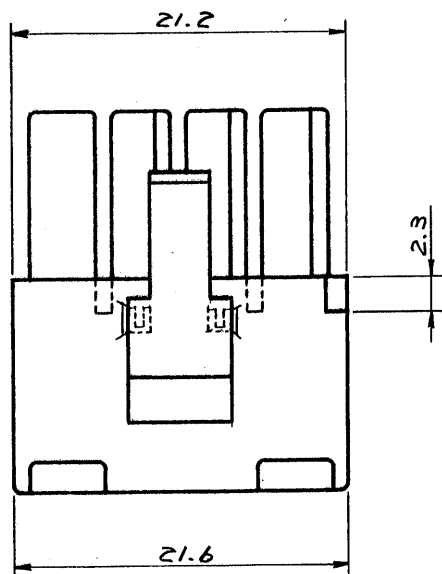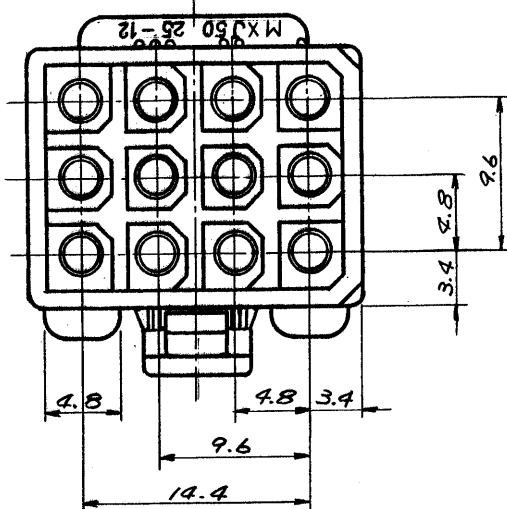

一般公差

10未満	±0.2
10以上30未満	±0.25
30以上	±0.3
角度	±3°

		公差 (Tolerances)		所要数 (Req)		DRWG. <i>G. Amano</i> 10/18/77	
		.000 → ±0.005 .00 → ±0.05				DSN'D <i>M. ENOMOTO</i> 10/19/77	
		.0 → ±0.1 . → ±0.3				CHK'D <i>K. S. Gino</i>	
		材料 (MAT'L)				APP'D <i>[Signature]</i>	
D ロックレグ支柱 ECN NO. 1486 11/21/74 K.H.		NYLON 66, 94V-2		molex MOLEX-JAPAN CO., LTD. 日本モレックス株式会社		No. SD-5025-12R1	
C REMOVED "X" ECN NO. 748 3/18/78 F. 128		熱処理 (H.T.)					
B ₁ ロッキングレグ 2/13/78 M.R.		HRc ———					
B リブ, パネルスロット, サークット NO. 12/1/77 M.R.		仕上げ (Finish)					
A REVISED 11/15/77 M.R.							
O PROPOSED 10/18/77 M.R.							
記号 (LTR) 変更内容 (Rev.)		Date Name		Scale 2/1		名称 (Name) MINI. FIT CONN. 12POS. RECEPTACLE HSG.	
						REV. D	