


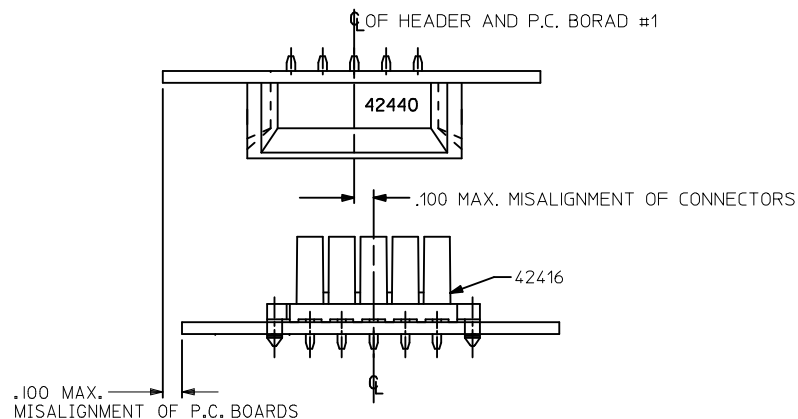


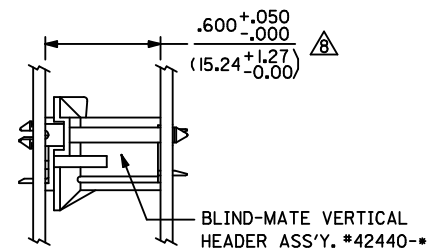


ALIGNMENT TOLERANCE FOR .100 MAX. BOARD-TO-BOARD MISALIGNMENT
(NO CONNECTOR FLOAT)

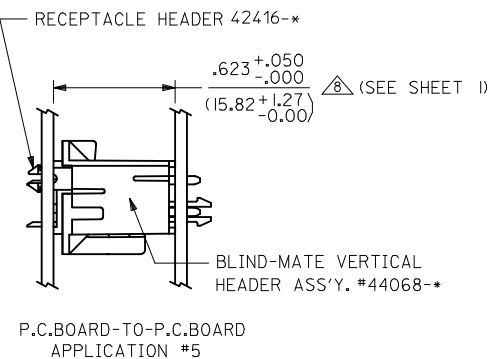


PANEL-TO-P.C. BOARD
APPLICATION #1

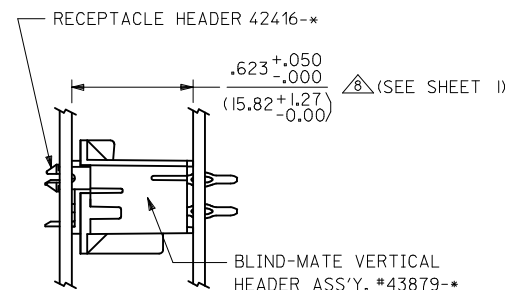

P.C. BOARD-TO-P.C. BOARD
APPLICATION #4

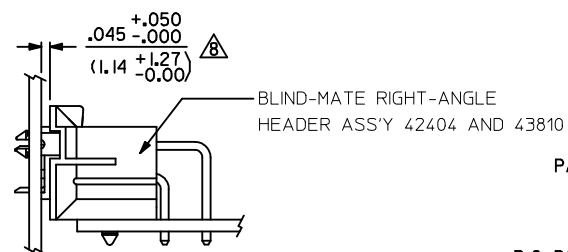

PANEL-TO-P.C. BOARD
APPLICATION #2

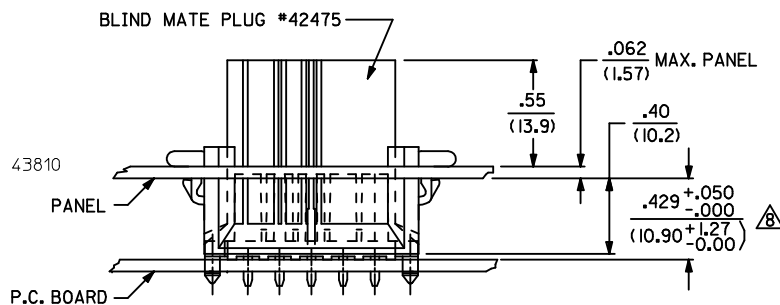

PANEL-TO-P.C. BOARD
APPLICATION #3

SEE SHEET 1 EC NO: UCP2012-3041 2012/06/28 DRAWN: NGUYEN 2012/06/28 CHKD: J.BELL 2012/07/03 APPR: F.S.MITH P2	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
					mm	INCH	DRAWN BY R.J.F.	DATE 01-25-89	TITLE SELECTIVELY LOADED RECEPTACLE HEADER ASSY (MINI-FIT JR. SERIES)				
				4 PLACES	± ---	± ---	CHECKED BY	DATE					
				3 PLACES	± ---	± .010	BAP	01-25-89					
				2 PLACES	± 0.25	± .015	APPROVED BY	DATE					
				1 PLACE	± 0.38	± ---	RAS	01-25-89					
				ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-42416-*		2 OF 3			
				SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

13		12		11		10		9		8		7		6		5		4		3		2		1					
PART NO.		ENG. NO.		CKT. SIZE	HSG. MAT'L.	TERMINAL PLATING REQUIRED AT EACH CIRCUIT LOCATION: - = VOIDED CIRCUIT																							
						1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
I5-24-8141		A-42416-14BA		14	94V-0	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A
I5-24-8145		A-42416-14BB		14	94V-0	A	-	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A
I5-24-8151		A-42416-14BC		14	94V-0	A	-	-	A	-	A	A	-	A	-	A	A	-	A	-	A	-	A	-	A	-	A	-	A
I5-24-8152		A-42416-14BD		14	94V-0	A	A	-	A	-	A	A	A	A	-	A	-	A	A	-	A	-	A	-	A	-	A	-	A
42416-0001		-----		06	94V-2	A	-	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
42416-0002		-----		10	94V-2	-	A	-	A	-	A	-	A	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
42416-0003		-----		06	94V-0	A	-	A	A	-	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
42416-0004		-----		24	94V-2	-	-	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
42416-0005		-----		14	94V-0	A	V	A	V	A	V	A	A	V	A	V	A	V	A	-	-	-	-	-	-	-	-	-	
42416-0006		-----		18	94V-0	A	V	V	A	V	V	A	A	A	V	V	A	V	V	A	A	A	-	-	-	-	-	-	