



SAW Components

Data Sheet B7833

Data Sheet

A large, stylized graphic of a globe is shown, with the word "EPCOS" overlaid in large, glowing, white letters. The globe is rendered with a grid of latitude and longitude lines, and the letters are positioned diagonally across the lower half of the image, creating a dynamic and modern visual effect.



SAW Components

B7833

Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet




Features

- Low-loss RF filter for mobile telephone EGSM system, receive path
- Usable passband 35 MHz
- Unbalanced operation
- Impedance 50 Ω input and output
- Ceramic Package for **Surface Mounted Technology (SMT)**


Chip sized SAW package QCS5C

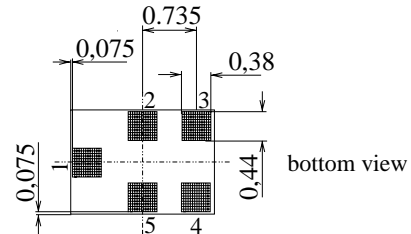

bottom view



side view



top view


Dimensions in mm, approx. weight 0,007 g

Terminals

- Ni, gold-plated

Pin configuration

- | | |
|---------|--------------------|
| 1 | Input, unbalanced |
| 4 | Output, unbalanced |
| 2, 3, 5 | Case ground |
| 2, 3, 5 | to be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B7833	B39941-B7833-C710	C61157-A7-A111	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 25 / + 85	°C	machine model, 10 pulses peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}^*	100*	V	
Input power at	P_{IN}	15	dBm	
GSM850, GSM900 GSM1800 and GSM1900 Tx bands				

* acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7833

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50 \text{ } \Omega$

Terminating load impedance: $Z_L = 50 \text{ } \Omega$

				min.	typ.	max.	
Center frequency	f_C			—	942,5	—	MHz
Maximum insertion attenuation	α_{\max}						
	925,0 ... 960,0	MHz		—	1,7	2,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
	925,0 ... 960,0	MHz		—	0,7	1,2	dB
Input VSWR							
	925,0 ... 960,0	MHz		—	1,8	2,1	
Output VSWR							
	925,0 ... 960,0	MHz		—	1,8	2,1	
Attenuation	α						
	0,0 ... 890,0	MHz		33	36	—	dB
	890,0 ... 905,0	MHz		22	28	—	dB
	905,0 ... 915,0	MHz		19	22	—	dB
	980,0 ... 1015,0	MHz		22	24	—	dB
	1015,0 ... 6000,0	MHz		25	33	—	dB



SAW Components

B7833

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature: $T = -25 \dots +85 \text{ }^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50 \text{ } \Omega$

Terminating load impedance: $Z_L = 50 \text{ } \Omega$

				min.	typ.	max.	
Center frequency	f_C			—	942,5	—	MHz
Maximum insertion attenuation	α_{\max}						
	925,0 ... 960,0	MHz		—	1,8	2,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$						
	925,0 ... 960,0	MHz		—	0,9	1,5	dB
Input VSWR							
	925,0 ... 960,0	MHz		—	1,8	2,1	
Output VSWR							
	925,0 ... 960,0	MHz		—	1,8	2,1	
Attenuation	α						
	0,0 ... 890,0	MHz		33	36	—	dB
	890,0 ... 905,0	MHz		22	25	—	dB
	905,0 ... 915,0	MHz		19	22	—	dB
	980,0 ... 1015,0	MHz		22	24	—	dB
	1015,0 ... 6000,0	MHz		25	32	—	dB



SAW Components

B7833


Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Transfer function (measurement at 25 °C)

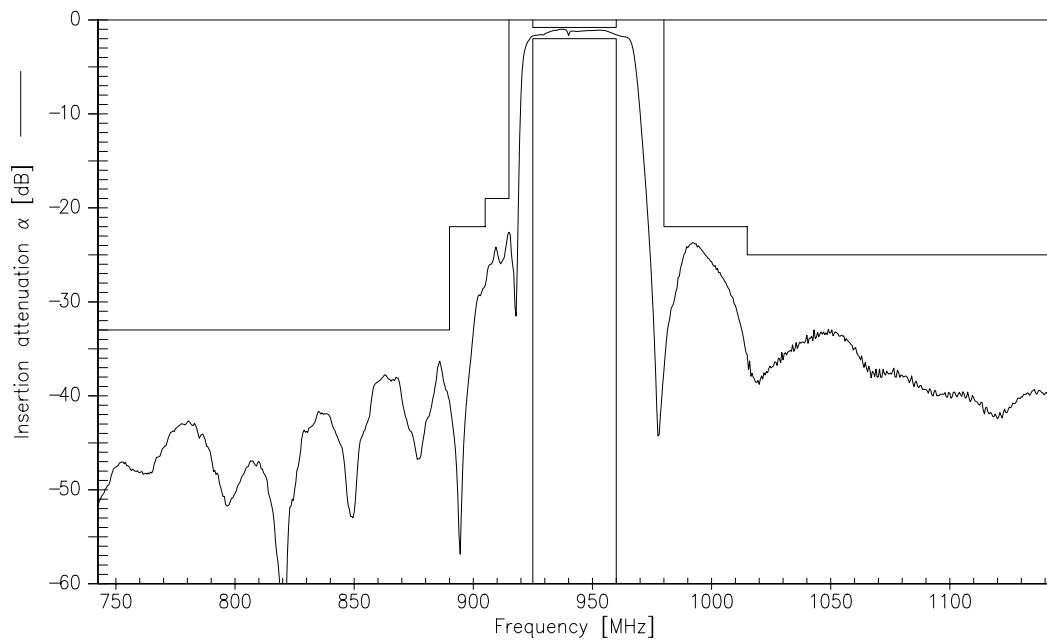

Transfer function (wideband measurement)

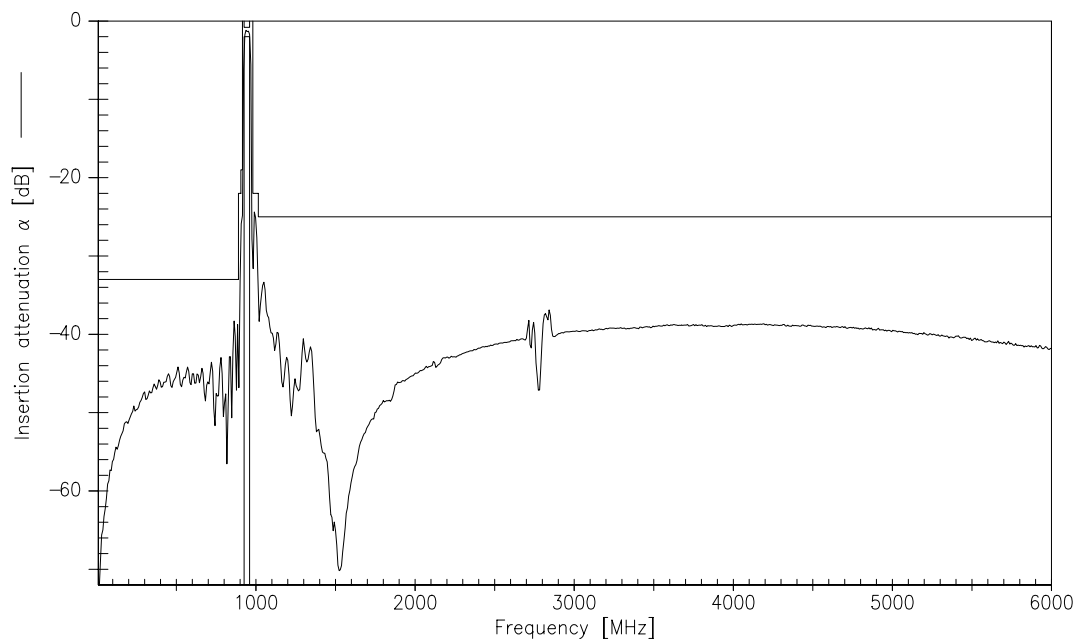



SAW Components	B7833
Low-Loss Filter for Mobile Communication	942,5 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.