

# 4 Channel DC/DC Converters IC with High-Efficiency Step-Up and Step-Down

## General Description

The RT9902 is a complete power supply solution for digital still cameras and other hand-held devices. It integrates a high-efficiency main step-up DC-DC converter, two high-efficiency step-down converters, a charge pump, and a linear controller that drives an external P-MOSFET for linear regulator. The RT9902 is targeted for applications that use either two or three AA cells or a single lithiumion battery.

The main step-up DC-DC converter accepts inputs from 1.5V to 5.5V and build in 2.6A Internal switch. The two step-down DC-DC converters (CH2, CH3) accept inputs from 1.5V to 5.5V and regulate a resistor adjustable output from 0.8V to 5.5V. Each DC-DC converter has independent shutdown input.

The feature of the charge pump is to deliver few current to micro-controller when the system operates in the standby mode. RT9902 includes a linear controller with 0.8V reference voltage. An adjustable operating frequency (up to 1.4MHz) is utilized to get optimum size, cost, and efficiency.

RT9902 is available in VQFN-32L 5x5 package.

## Ordering Information

|        |                                                   |
|--------|---------------------------------------------------|
| RT9902 | □ □                                               |
|        | Package Type                                      |
|        | QV : VQFN-32L 5x5 (V-Type)                        |
|        | Operating Temperature Range                       |
|        | P : Pb Free with Commercial Standard              |
|        | G : Green (Halogen Free with Commercial Standard) |

Note :

Richtek Pb-free and Green products are :

- ▶RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶Suitable for use in SnPb or Pb-free soldering processes.
- ▶100% matte tin (Sn) plating.


## Features

- 1.5V to 5.5V Battery Input Voltage Range
- Main step-up DC-DC Converter
  - ▶1.5V to 5.5V Adjustable Output Voltage
  - ▶Up to 90% Efficiency
  - ▶2.6A, 0.3Ω Internal Power Switch
- Two Step-Down DC-DC Converters
  - ▶0.8V to 5.5V Adjustable Output Voltage
  - ▶94% Efficiency
  - ▶100% Duty Cycle
- Step-up Charge Pump for Micro-Controller
- Linear Controller for Linear Regulator
- Up to 1.4MHz Switching Frequency
- 1μA Supply Current in Shutdown Mode
- Programmable Soft Start Function
- Independent Enable Pin (CH1, CH2, CH3)
- External Compensation Network (CH1, CH2, CH3)
- Short Circuit Protection (CH1, CH2, CH3)
- Over Voltage Protection (CH2)
- 32-Lead VQFN Package
- RoHS Compliant and 100% Lead (Pb)-Free

## Applications

- Digital Still Cameras
- PDAs
- Portable Devices

## Pin Configurations

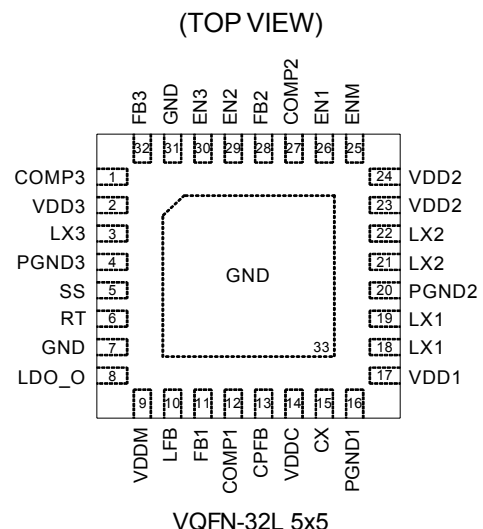

## Typical Application Circuit

1-cell Li+ Battery 3V to 4.2V

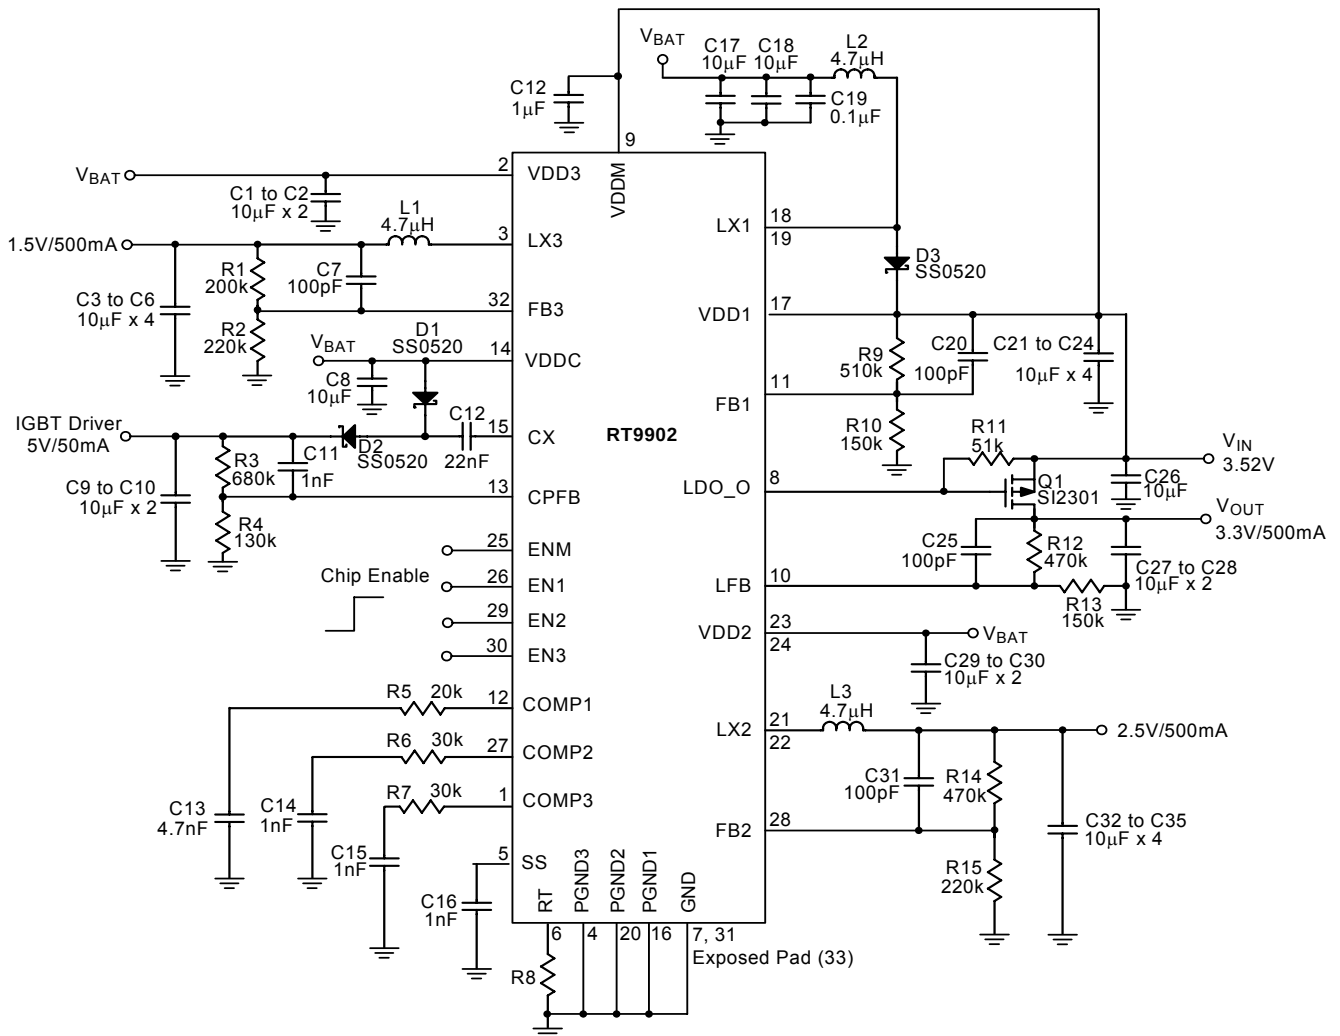


Figure 1. Typical Application Circuit from 1-cell Li+ Battery

1-cell Li+ Battery 3.4V to 4.2V

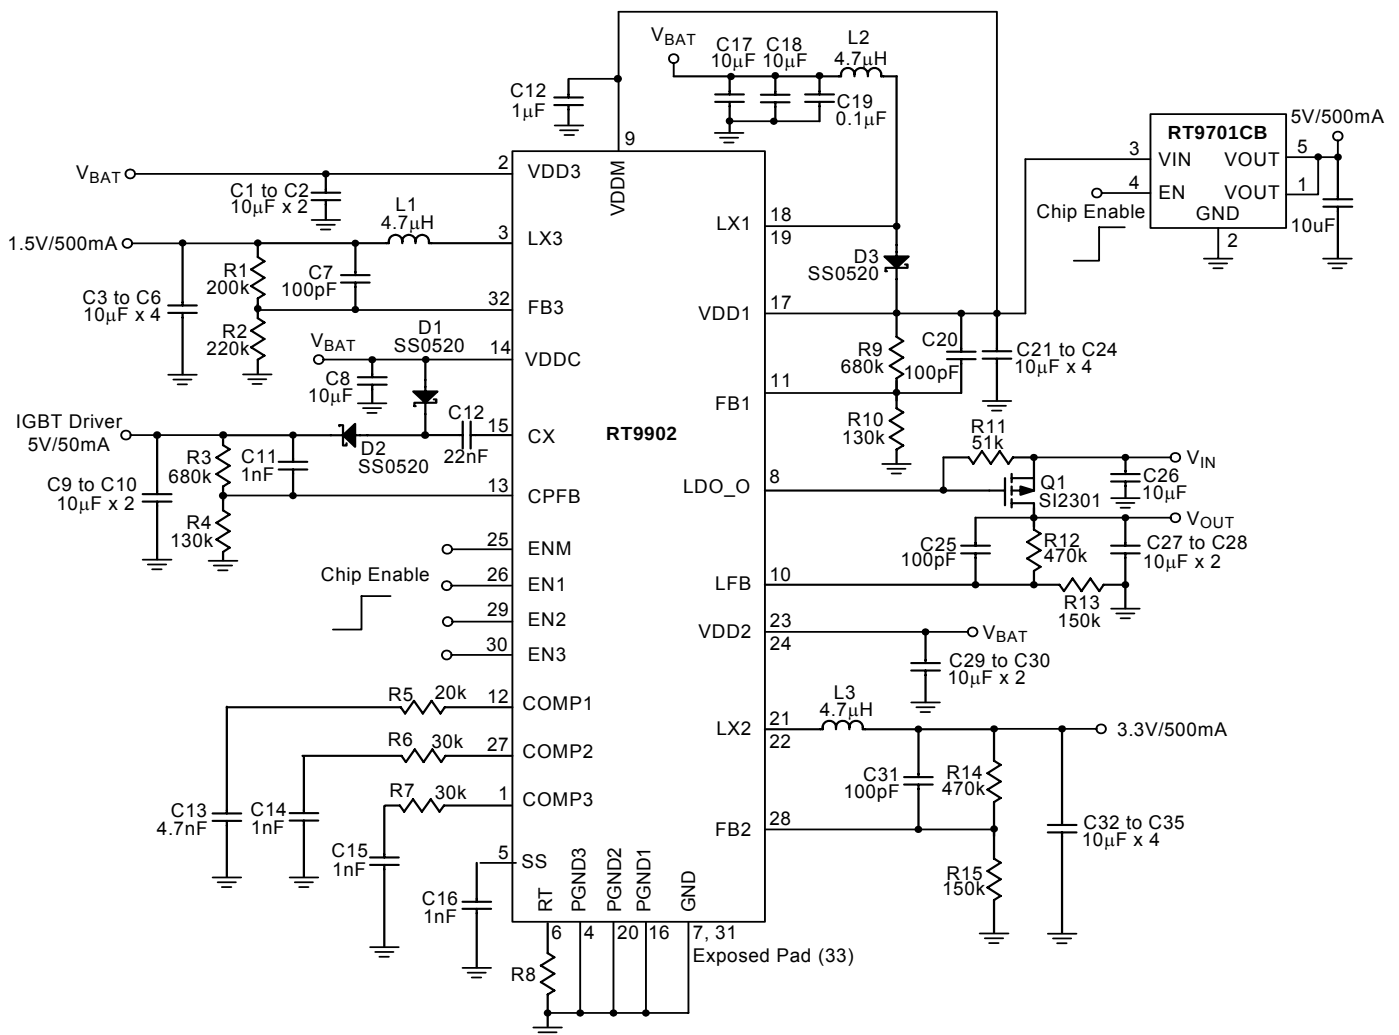


Figure 2. Typical Application Circuit from 1-cell Li+ Battery

## 2-AA Battery 2.0V to 3.4V


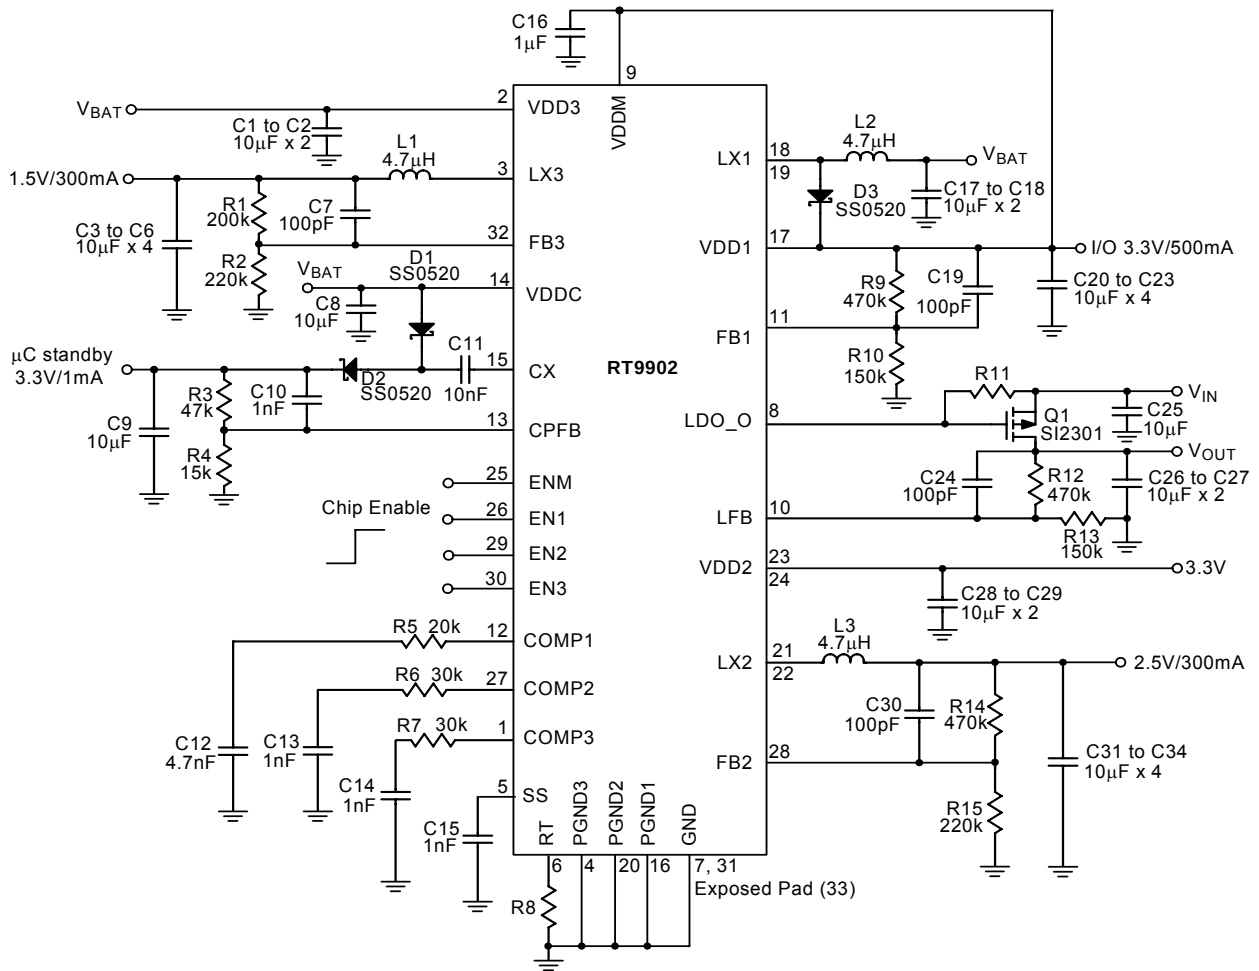


Figure 3. Typical Application Circuit from 2-AA Battery Supply

## Function Block Diagram

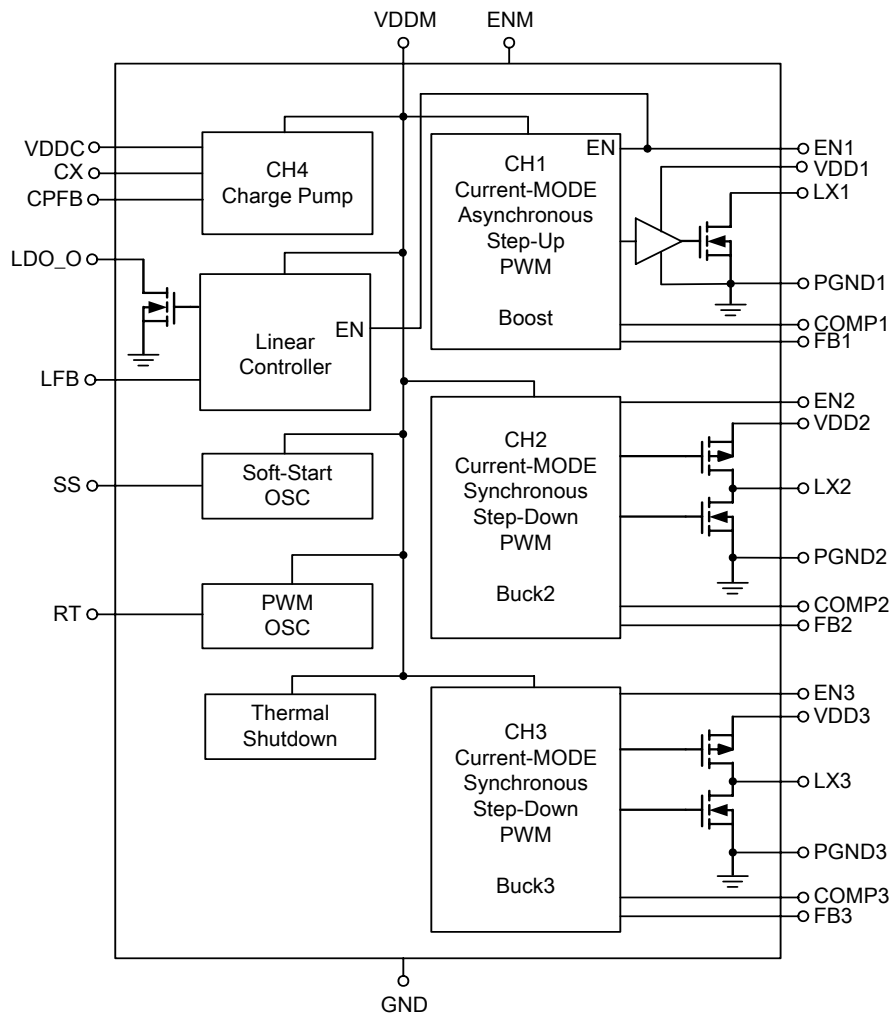

| ENM | EN1 | EN2 | EN3 | Charge Pump | CH1 + Linear Controller | CH2 | CH3 |
|-----|-----|-----|-----|-------------|-------------------------|-----|-----|
| 0   | X   | X   | X   | Off         | Off                     | Off | Off |
| 1   | 0   | 0   | 0   | On          | Off                     | Off | Off |
| 1   | 1   | 0   | 0   | On          | On                      | Off | Off |
| 1   | 1   | 1   | 0   | On          | On                      | On  | Off |
| 1   | 1   | 1   | 1   | On          | On                      | On  | On  |

## Functional Pin Description

| Pin No.          | Pin Name | Pin Function                                                                                                                            |
|------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 1                | COMP3    | CH3 Feedback Compensation Pin.                                                                                                          |
| 2                | VDD3     | CH3 Power Input Pin.                                                                                                                    |
| 3                | LX3      | CH3 Switch Node. Drains of the internal P-Channel and N-MOSFET switches. Connect an inductor to LX3 pins together as close as possible. |
| 4                | PGND3    | Power Ground for CH3.                                                                                                                   |
| 5                | SS       | Sets the soft start interval of the converter. Connect a capacitor from this pin to ground.                                             |
| 6                | RT       | Frequency Setting Resistor Connection Pin. Frequency is 500kHz if RT pin not connected.                                                 |
| 7                | GND      | Analog Ground.                                                                                                                          |
| 8                | LDO_O    | Linear Controller Driver Output.                                                                                                        |
| 9                | VDDM     | Device Input Power Pin.                                                                                                                 |
| 10               | LFB      | Linear Controller Feedback Input.                                                                                                       |
| 11               | FB1      | CH1 Feedback Input Pin.                                                                                                                 |
| 12               | COMP1    | CH1 Feedback Compensation Pin.                                                                                                          |
| 13               | CPFB     | Charge Pump Feedback Pin.                                                                                                               |
| 14               | VDDC     | Charge Pump Power Input Pin.                                                                                                            |
| 15               | CX       | Charge Pump External Driver Pin.                                                                                                        |
| 16               | PGND1    | Power Ground for CH1.                                                                                                                   |
| 17               | VDD1     | CH1 Power Input Pin. Connect output of Boost to this pin.                                                                               |
| 18, 19           | LX1      | CH1 Switch Node. Connect an inductor to LX1 pins together as close as possible.                                                         |
| 20               | PGND2    | Power Ground for CH2.                                                                                                                   |
| 21, 22           | LX2      | CH2 Switch Node. Drains of the internal P-MOSFET and N-MOSFET switches. Connect an inductor to LX2 pins together as close as possible.  |
| 23, 24           | VDD2     | CH2 Power Input Pin.                                                                                                                    |
| 25               | ENM      | Whole Device Control Pin. Tie this pin higher than 1.3V to enable the device. Tie below 0.4V to turn off the device.                    |
| 26               | EN1      | CH1 Enable Input. Tie this pin higher than 1.3V to enable CH1. Tie below 0.4V to turn off the CH1.                                      |
| 27               | COMP2    | CH2 Feedback Compensation Pin.                                                                                                          |
| 28               | FB2      | CH2 Feedback Input.                                                                                                                     |
| 29               | EN2      | CH2 Enable Input. Tie this pin higher than 1.3V to enable CH2. Tie below 0.4V to turn off the CH2.                                      |
| 30               | EN3      | CH3 Enable Input. Tie this pin higher than 1.3V to enable CH3. Tie below 0.4V to turn off the CH3.                                      |
| 31               | GND      | Analog Ground.                                                                                                                          |
| 32               | FB3      | CH3 Feedback Input.                                                                                                                     |
| Exposed Pad (33) | GND      | The exposed pad must be soldered to a large PCB and connected to GND for maximum power dissipation.                                     |

## Absolute Maximum Ratings

- Supply Input Voltage ( $V_{DDM}$ ,  $V_{DD1}$ ,  $V_{DD2}$ ,  $V_{DD3}$ ,  $V_{DDC}$ ) ----- -0.3 to 7V
- LX1 Pin Switch Voltage ----- -0.3V to 7V
- LX2 Pin Switch Voltage ----- -0.3V to ( $V_{DD2} + 0.3V$ )
- LX3 Pin Switch Voltage ----- -0.3V to ( $V_{DD3} + 0.3V$ )
- CX Pin Switch Voltage ----- -0.3V to ( $V_{DDC} + 0.3V$ )
- Other I/O Pin Voltage ----- -0.3V to ( $V_{DDM} + 0.3V$ )
- Package Thermal Resistance  
VQFN-32L 5x5,  $\theta_{JA}$  ----- 34°C/W
- Lead Temperature (Soldering, 10 sec.) ----- 260°C
- Operation Temperature Range ----- -40°C to 85°C
- Junction Temperature Range ----- 0°C to 125°C
- Storage Temperature Range ----- -65°C to 150°C
- ESD Susceptibility  
HBM (Human Body Mode) ----- 2kV  
MM (Machine Mode) ----- 200V

## Electrical Characteristics

( $V_{DDM} = 3.3V$ ,  $T_A = 25^\circ C$ , Unless Otherwise specification)

| Parameter                                              | Symbol                                   | Test Condition                                                                                                      | Min | Typ  | Max | Units   |
|--------------------------------------------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----|------|-----|---------|
| <b>Supply Voltage</b>                                  |                                          |                                                                                                                     |     |      |     |         |
| Minimum Startup Voltage (Boost)                        | $V_{ST}$                                 | Boost loading < 1mA                                                                                                 | --  | 1.5  | --  | V       |
| VDDM Operating Voltage                                 | $V_{VDDM}$                               | VDDM Pin Voltage                                                                                                    | 2.4 | --   | 5.5 | V       |
| VDD1, VDD2, VDD3 Operating Voltage                     | $V_{VDD1}$<br>$V_{VDD2}$ ,<br>$V_{VDD3}$ | VDD1, VDD2, VDD3 Pin Voltage                                                                                        | 1.5 |      | 5.5 | V       |
| VDDM Over Voltage Protection                           |                                          |                                                                                                                     | --  | 6.5  | --  | V       |
| <b>Supply Current</b>                                  |                                          |                                                                                                                     |     |      |     |         |
| Shutdown Supply Current                                | $I_{OFF}$                                | $V_{ENM}$ pin=0V                                                                                                    | --  | 0.01 | 1   | $\mu A$ |
| Charge Pump Current                                    | $I_{VDDM}$                               | $V_{VDDM} = 3.3V$ , $V_{ENM} = 3.3V$ ,<br>$V_{EN1} = 0V$ , $V_{EN2} = 0V$ ,<br>$V_{EN3} = 0V$                       | --  | 30   | 42  | $\mu A$ |
| CH1 DC/DC Converter + Linear Controller Supply Current | $I_{VDDM}$                               | $V_{VDDM} = 3.3V$ ,<br>$V_{FB1} = 0.9V$<br>$V_{ENM} = 3.3V$ , $V_{EN1} = 3.3V$ ,<br>$V_{EN2} = 0V$ , $V_{EN3} = 0V$ | --  | 250  | 350 | $\mu A$ |
| CH2 DC/DC Converter Supply Current                     | $I_{VDDM}$                               | $V_{VDDM} = 3.3V$ ,<br>$V_{FB2} = 0.9V$<br>$V_{ENM} = 3.3V$ , $V_{EN1} = 0V$ ,<br>$V_{EN2} = 3.3V$ , $V_{EN3} = 0V$ | --  | 250  | 350 | $\mu A$ |
| CH3 DC/DC Converter Supply Current                     | $I_{VDDM}$                               | $V_{VDDM} = 3.3V$ ,<br>$V_{FB3} = 0.9V$<br>$V_{ENM} = 3.3V$ , $V_{EN1} = 0V$ ,<br>$V_{EN2} = 0V$ , $V_{EN3} = 3.3V$ | --  | 250  | 350 | $\mu A$ |


*To be continued*

| Parameter                                                 | Symbol            | Test Condition                                | Min   | Typ  | Max   | Units       |
|-----------------------------------------------------------|-------------------|-----------------------------------------------|-------|------|-------|-------------|
| <b>Oscillator</b>                                         |                   |                                               |       |      |       |             |
| Operation Frequency Range                                 | $F_{OSC}$         | RT Open                                       | 475   | 550  | 625   | kHz         |
| CH1 Maximum Duty Cycle                                    | $D_{MAX1}$        |                                               | --    | 85   | 90    | %           |
| CH2 Maximum Duty Cycle                                    | $D_{MAX2}$        |                                               | --    | --   | 100   | %           |
| CH3 Maximum Duty Cycle                                    | $D_{MAX3}$        |                                               | --    | --   | 100   | %           |
| <b>Feedback Voltage (CH1, CH2, CH3, CH4)</b>              |                   |                                               |       |      |       |             |
| Feedback Voltage                                          | $V_{FB}$          | CH1, CH2, CH3                                 | 0.788 | 0.8  | 0.812 | V           |
| Feedback Voltage (Charge Pump)                            | $V_{CPFB}$        | CH4                                           | 0.78  | 0.8  | 0.82  | V           |
| Feedback Voltage                                          | $ \Delta V_{FB} $ | CH1, CH2, CH3, CH4<br>$3.0V < V_{DDM} < 5.5V$ | --    | --   | 12    | mV          |
| <b>Error Amplifier</b>                                    |                   |                                               |       |      |       |             |
| GM                                                        |                   |                                               | --    | 0.2  | --    | ms          |
| Compensation Source Current                               |                   |                                               | --    | 22   | --    | $\mu A$     |
| Compensation Sink Current                                 |                   |                                               | --    | 22   | --    | $\mu A$     |
| <b>Power Switch</b>                                       |                   |                                               |       |      |       |             |
| CH1 On Resistance of MOSFET                               | $R_{DS(ON)}$      | N-MOSFET                                      | --    | 300  | 400   | $m\Omega$   |
| CH1 Current Limitation                                    |                   | $V_{DD1} = 3.3V$                              | 2     | 2.6  | 3     | A           |
| CH2 On Resistance of MOSFET                               | $R_{DS(ON)}$      | N-MOSFET, $V_{DD2} = 3.3V$                    | --    | 350  | 450   | $m\Omega$   |
|                                                           |                   | P-MOSFET, $V_{DD2} = 3.3V$                    | --    | 350  | 450   | $m\Omega$   |
| CH2 Current Limitation                                    |                   | $V_{DD2} = 3.3V$                              | 1.3   | 1.5  | 1.9   | A           |
| CH3 On Resistance of MOSFET                               | $R_{DS(ON)}$      | N-MOSFET, $V_{DD3} = 3.3V$                    | --    | 350  | 450   | $m\Omega$   |
|                                                           |                   | P-MOSFET, $V_{DD3} = 3.3V$                    | --    | 350  | 450   | $m\Omega$   |
| CH3 Current Limitation                                    |                   | $V_{DD3} = 3.3V$                              | 1.3   | 1.5  | 1.9   | A           |
| <b>Linear Controller</b>                                  |                   |                                               |       |      |       |             |
| Feedback Voltage for Linear Controller                    | $V_{LFB}$         |                                               | 0.774 | 0.79 | 0.806 | V           |
| LDO_O pin Sink Current                                    |                   | $V_{LDO\_O} = 1V$                             | 110   | 150  | --    | $\mu A$     |
| <b>UVP (CH2, CH3) &amp; Over Voltage Protection (CH2)</b> |                   |                                               |       |      |       |             |
| UVP Threshold Voltage @FB2, FB3                           |                   |                                               | 0.3   | 0.4  | 0.5   | V           |
| Over Voltage Protection @FB2                              |                   |                                               | 0.95  | 1    | --    | V           |
| <b>Control</b>                                            |                   |                                               |       |      |       |             |
| ENM, EN1, EN2, EN3 Input High Level Threshold             |                   | $V_{DDM} = 3.3V$                              | --    | 0.8  | 1.3   | V           |
| ENM, EN1, EN2, EN3 Input Low Level Threshold              |                   | $V_{DDM} = 3.3V$                              | 0.4   | 0.8  | --    | V           |
| <b>Thermal Protection</b>                                 |                   |                                               |       |      |       |             |
| Thermal Shutdown                                          | $T_{SD}$          |                                               | 140   | 180  | --    | $^{\circ}C$ |
| Thermal Shutdown Hysteresis                               | $\Delta T_{SD}$   |                                               | --    | 10   | --    | $^{\circ}C$ |




## Typical Operating Characteristics


Reference Voltage vs. Temperature

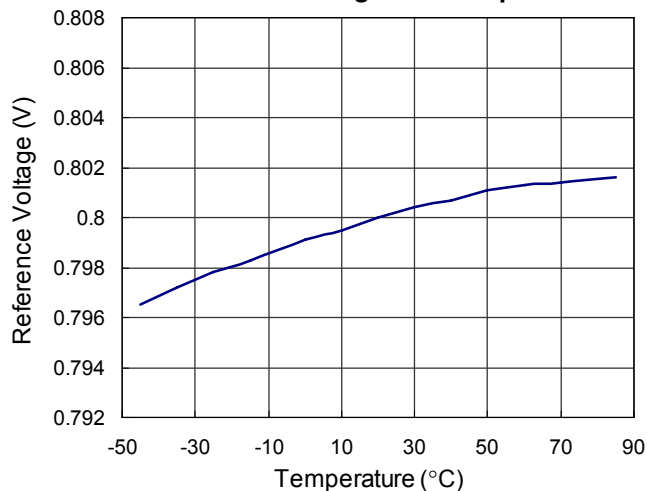


Oscillator Frequency vs.  $R_{RT}$

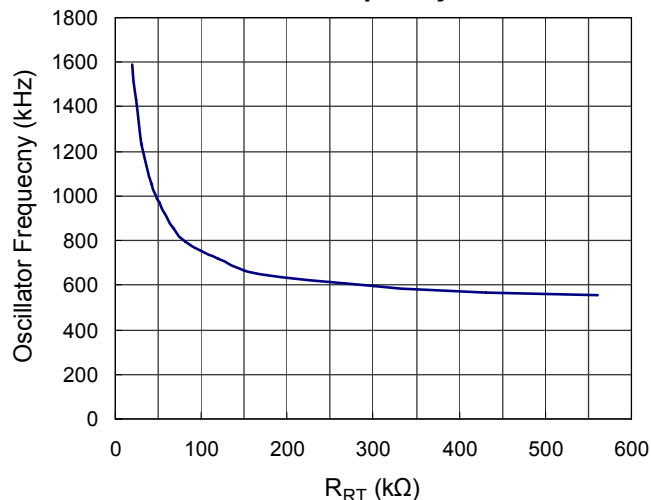


Boost Efficiency vs. Output Current

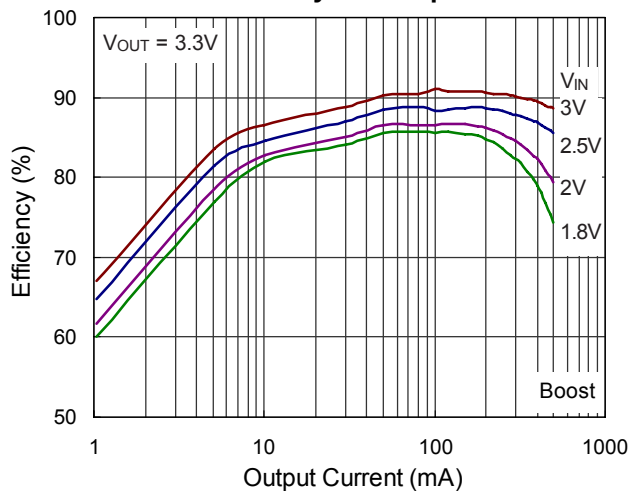


Boost Output Voltage vs.  $V_{DD1}$  Voltage

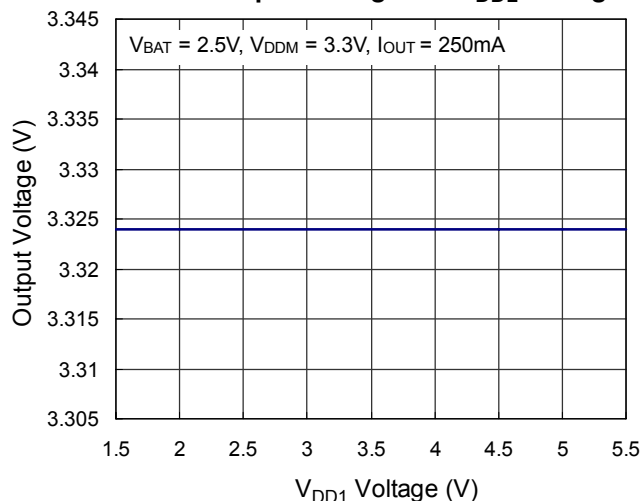


Output Voltage vs.  $V_{DDM}$  Voltage

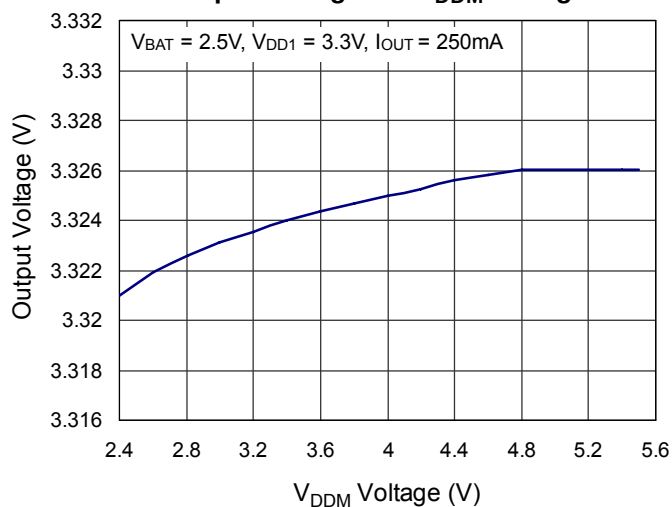


Boost Load Transient Response

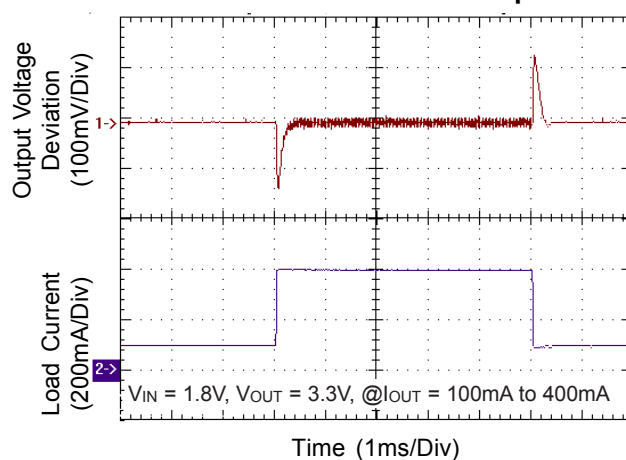


Boost Load Transient Response

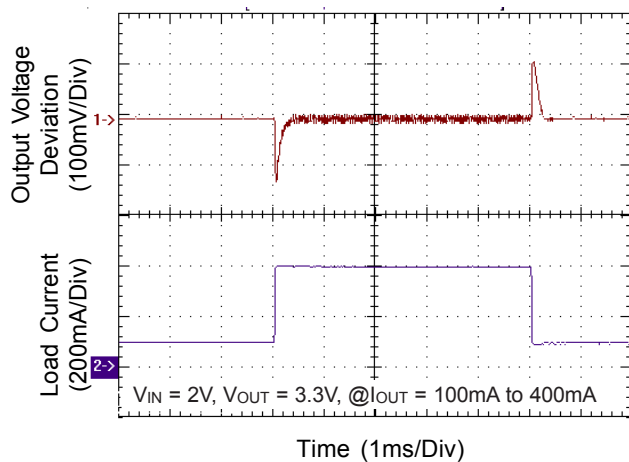


Boost Load Transient Response

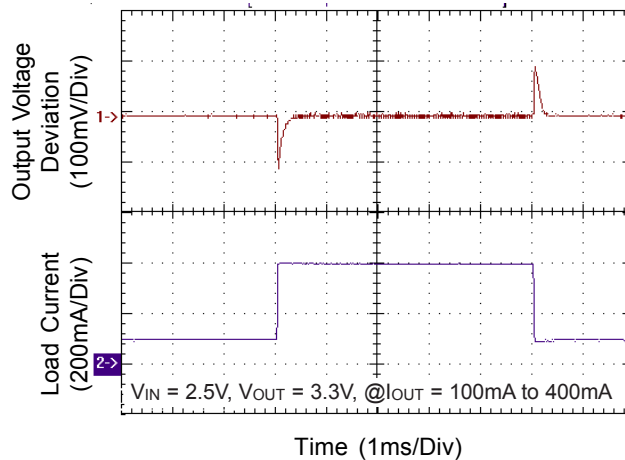


Boost Load Transient Response

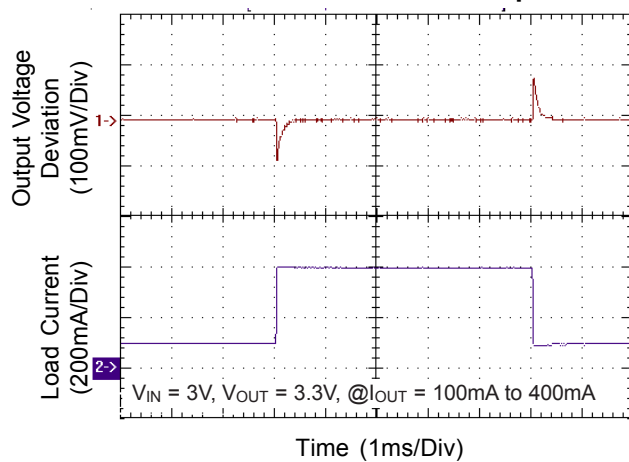


Boost LX &amp; Output Ripple

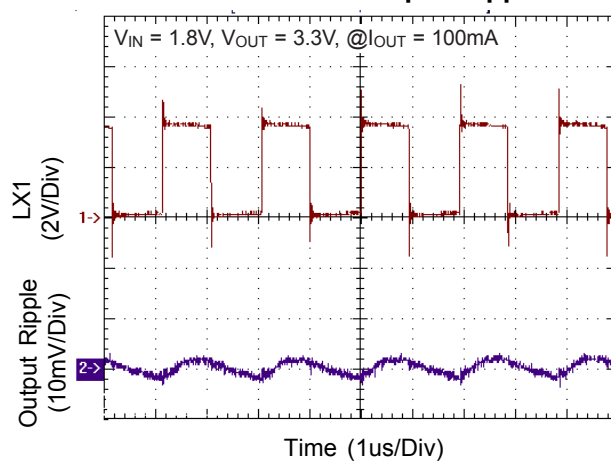


Boost LX &amp; Output Ripple

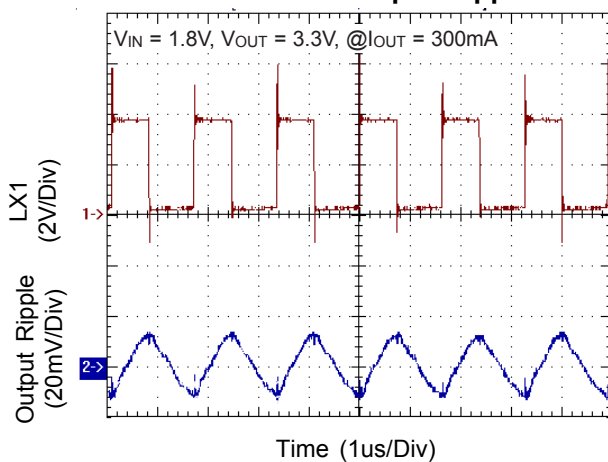


Boost LX &amp; Output Ripple

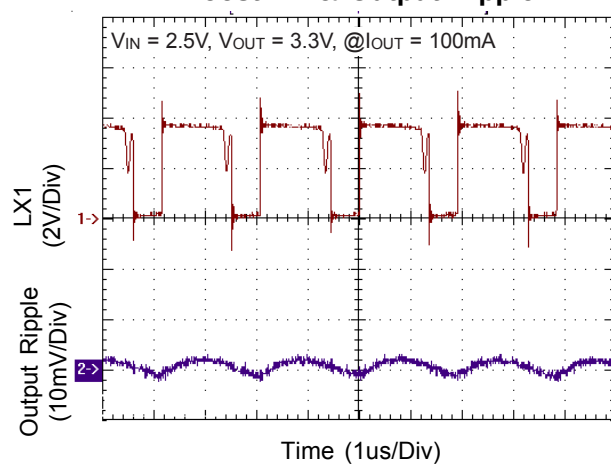


Boost LX & Output Ripple

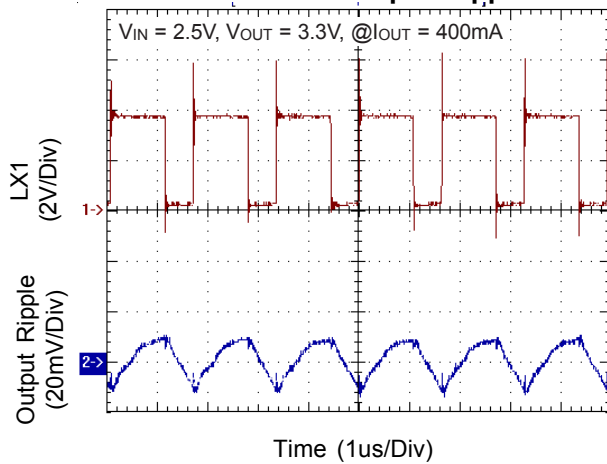


Boost LX & Output Ripple

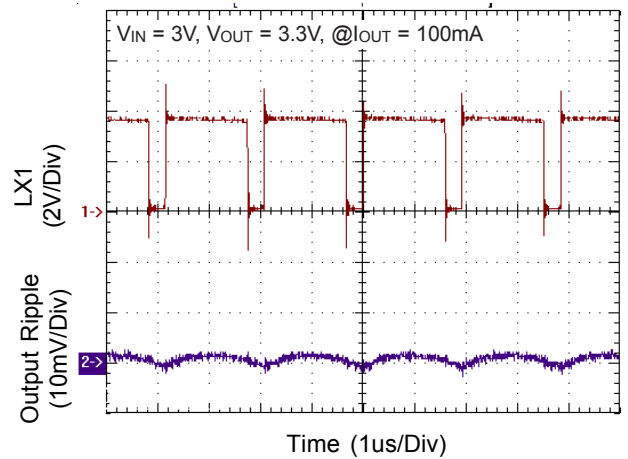


Boost LX & Output Ripple

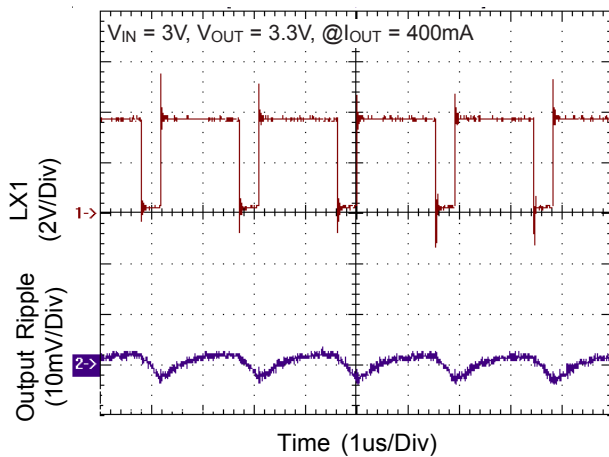


Buck2 Efficiency vs. Output Current


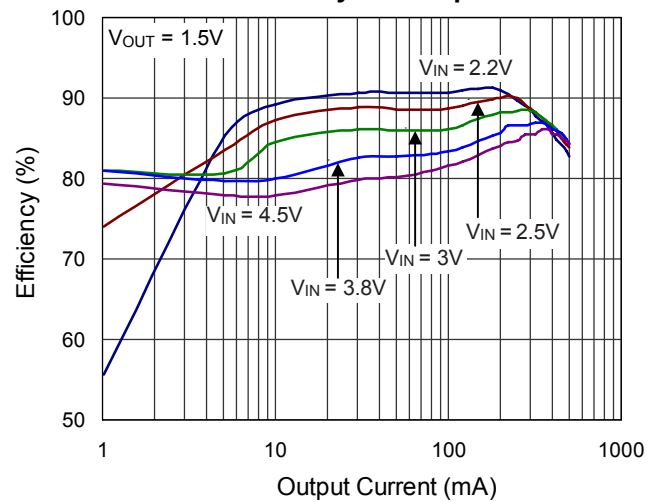


Buck2 Efficiency vs. Output Current

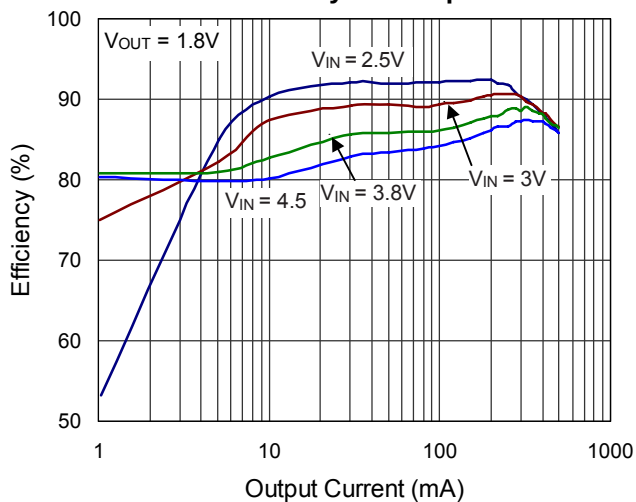


Buck2 Efficiency vs. Output Current

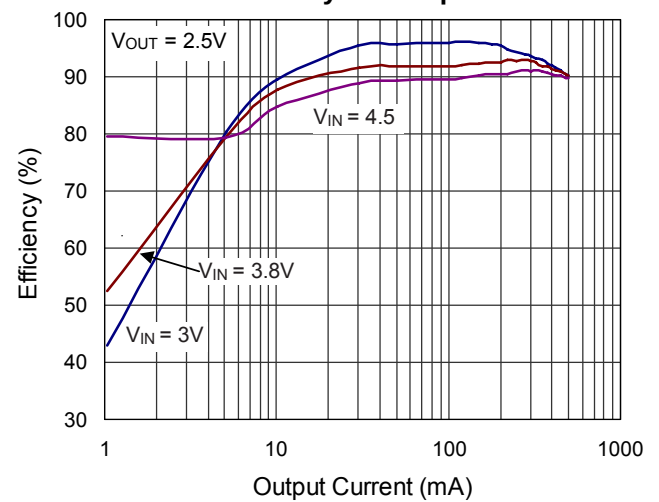


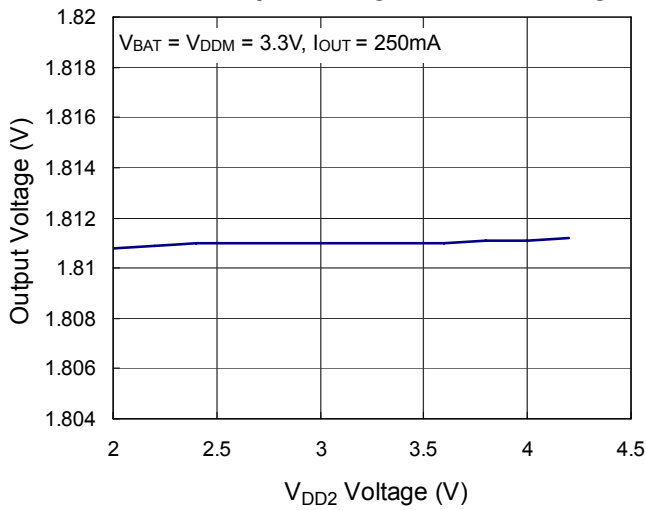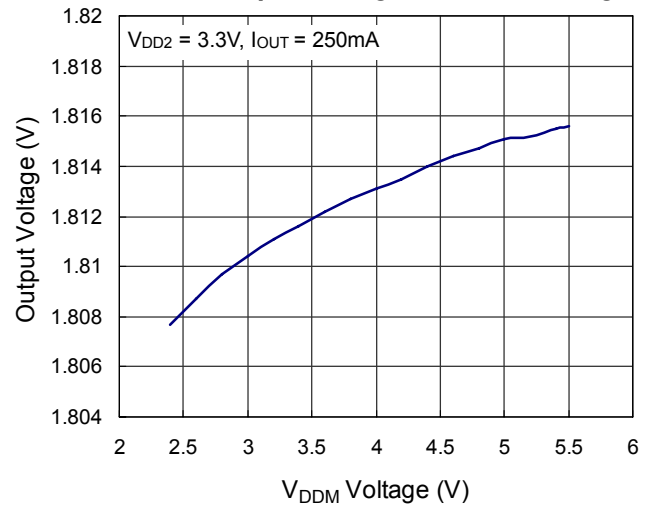Buck2 Output Voltage vs.  $V_{DD2}$  VoltageBuck2 Output Voltage vs.  $V_{DDM}$  Voltage


Buck2 Load Transient Response

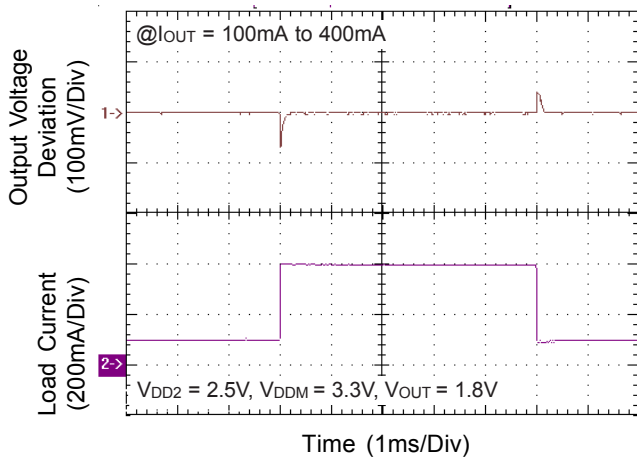


Buck2 Load Transient Response

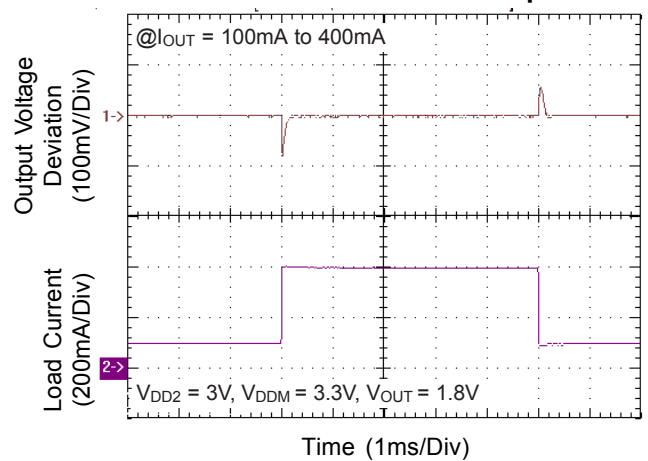


Buck2 Load Transient Response

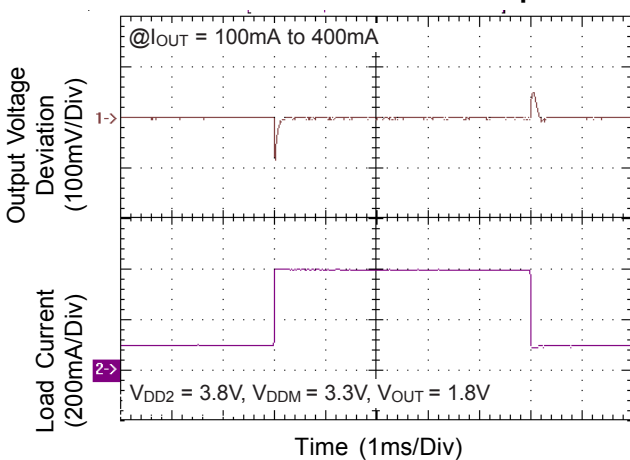


Buck2 Load Transient Response

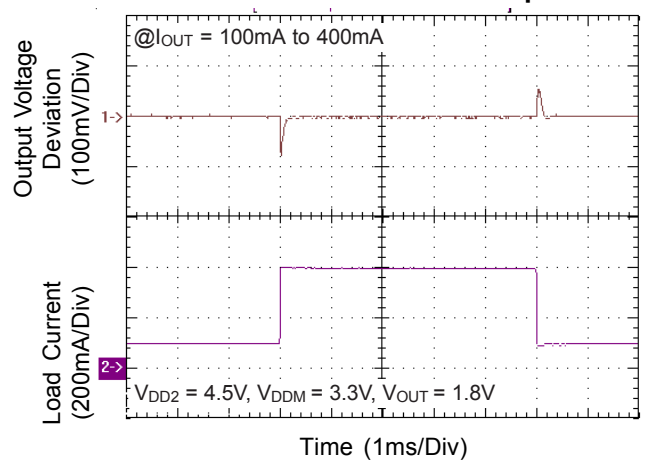


Buck2 LX & Output Ripple

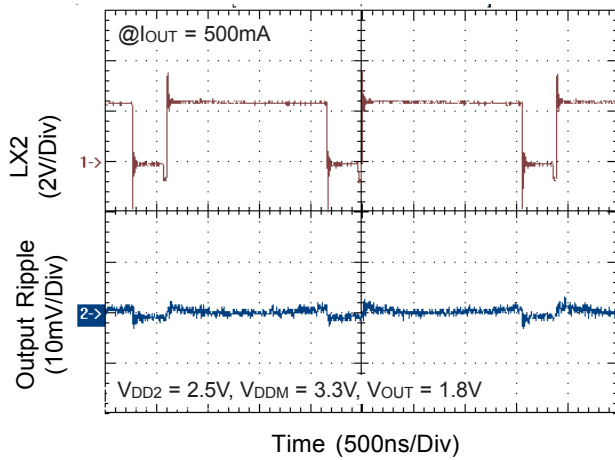


Buck2 LX & Output Ripple

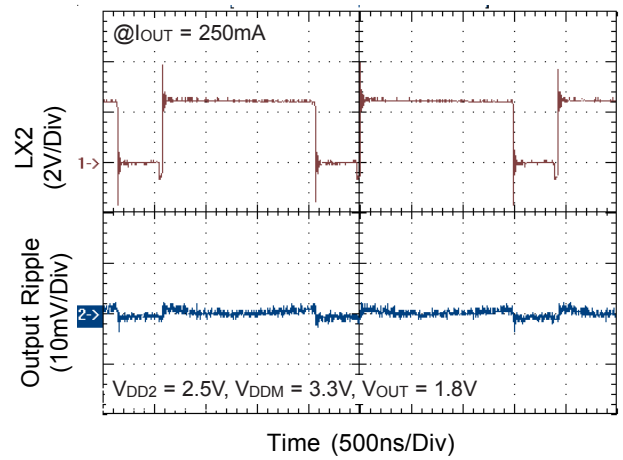


Buck2 LX & Output Ripple

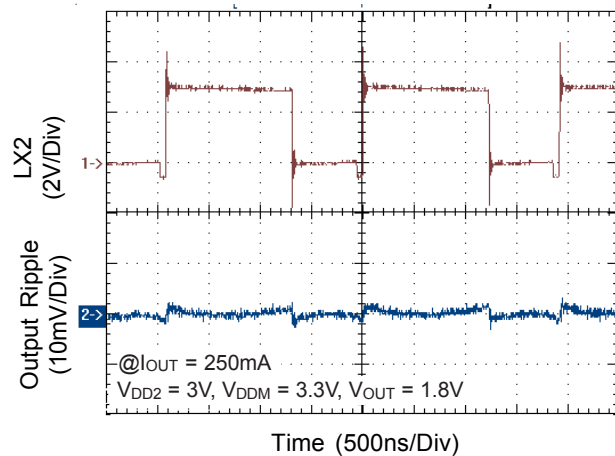


Buck2 LX & Output Ripple

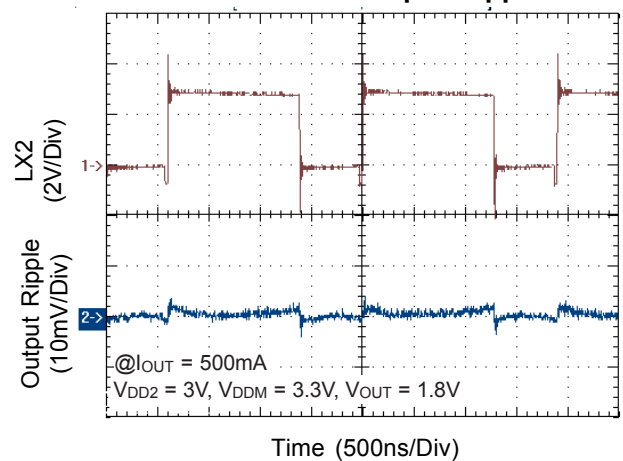


Buck2 LX & Output Ripple

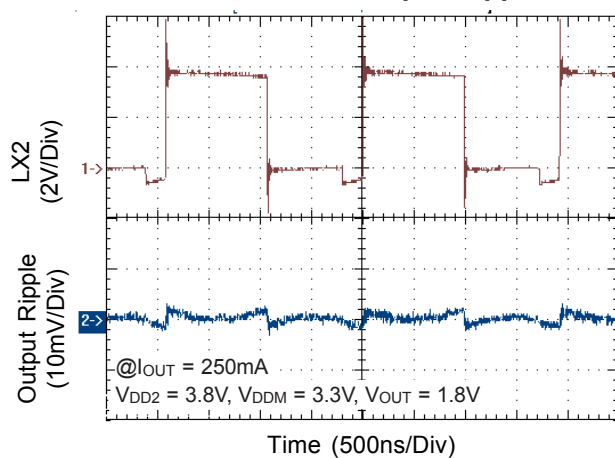


Buck2 LX & Output Ripple

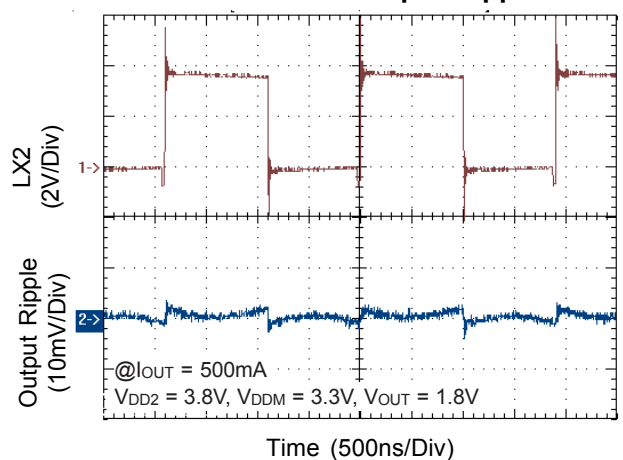


Buck2 LX &amp; Output Ripple

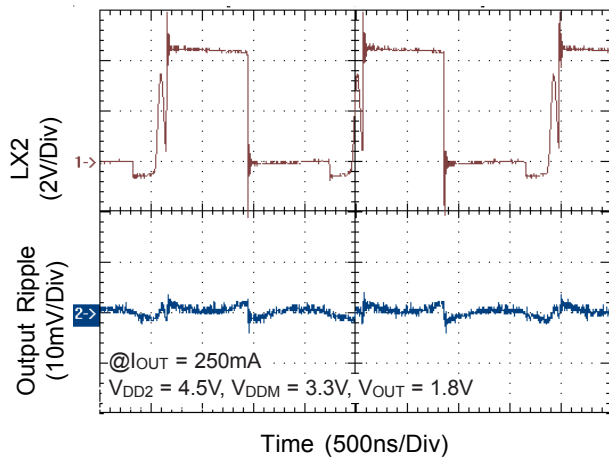


Buck2 LX &amp; Output Ripple

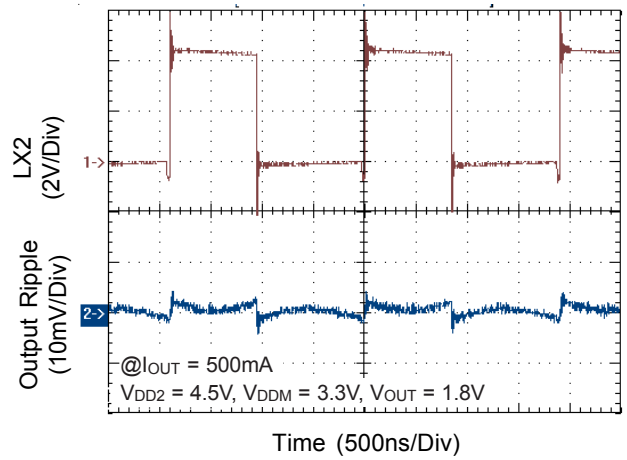



Buck3 Efficiency vs. Output Current

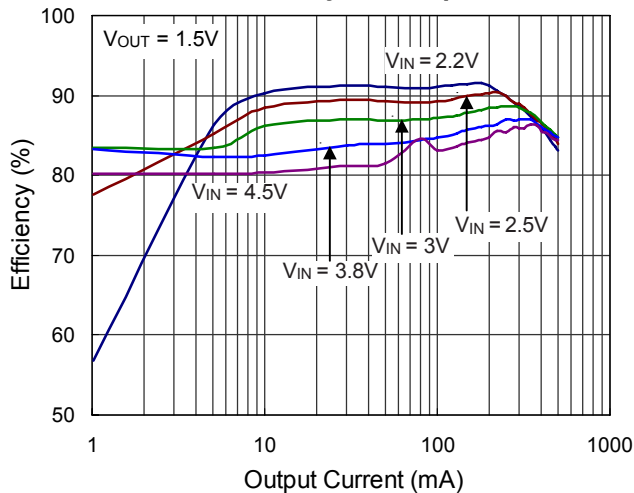


Buck3 Efficiency vs. Output Current

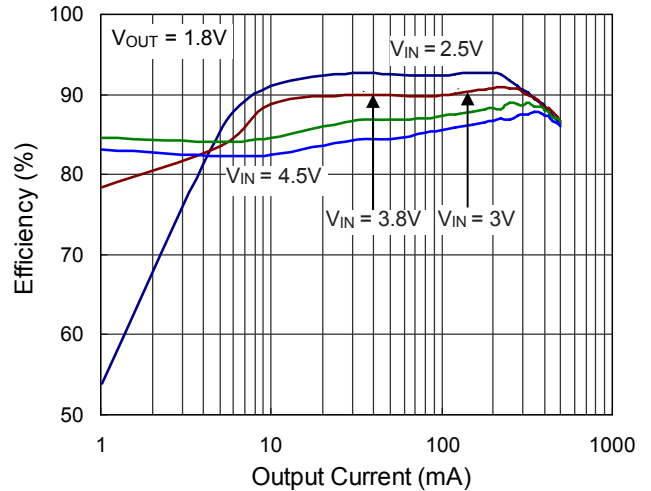


Buck3 Efficiency vs. Output Current

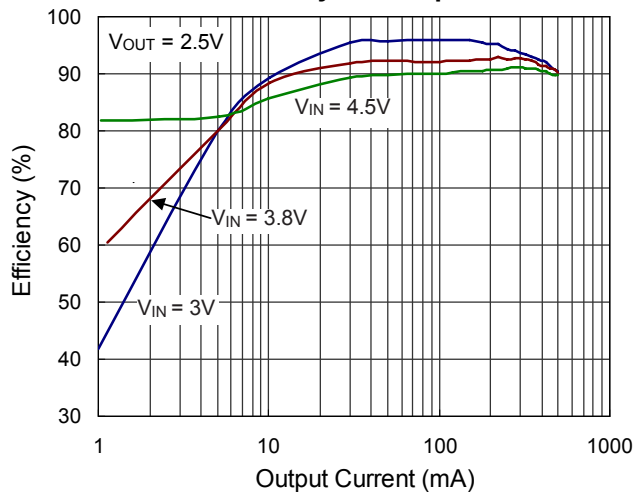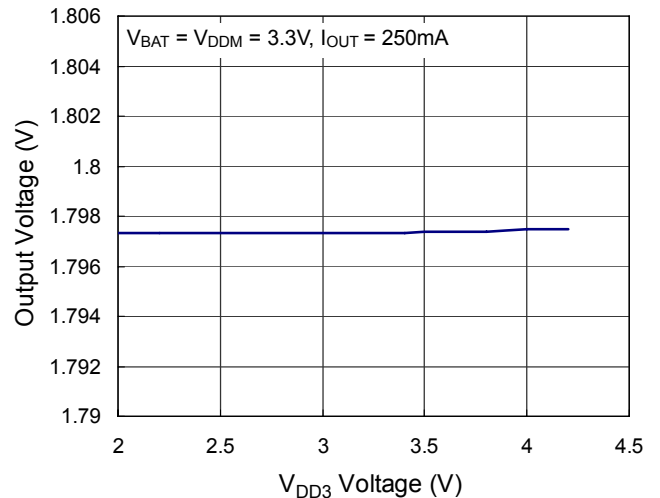Buck3 Output Voltage vs. V<sub>DD3</sub> Voltage


**Buck3 Output Voltage vs.  $V_{DDM}$  Voltage**

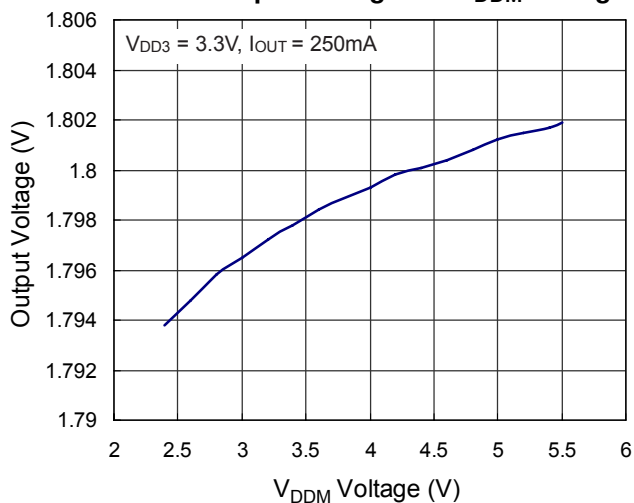


**Buck3 Load Transient Response**

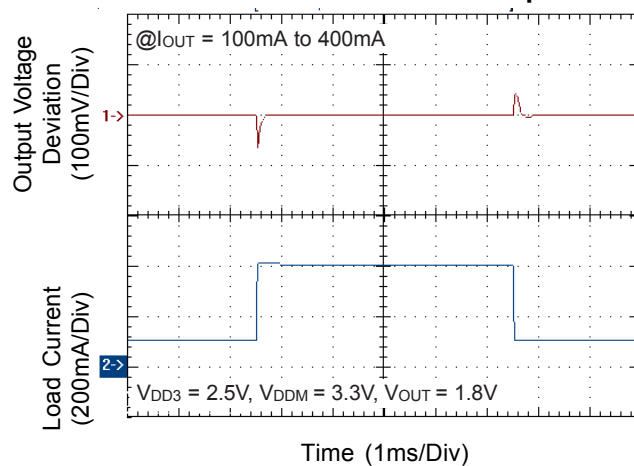


**Buck3 Load Transient Response**

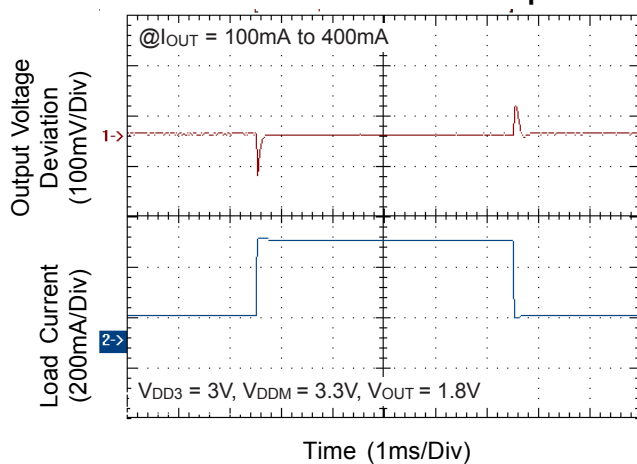


**Buck3 Load Transient Response**

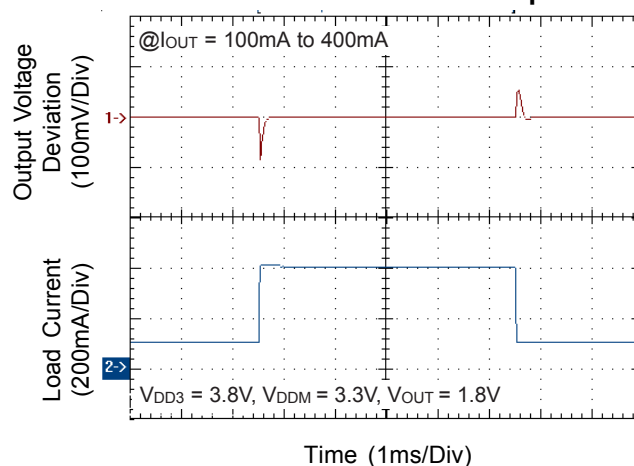


**Buck3 Load Transient Response**

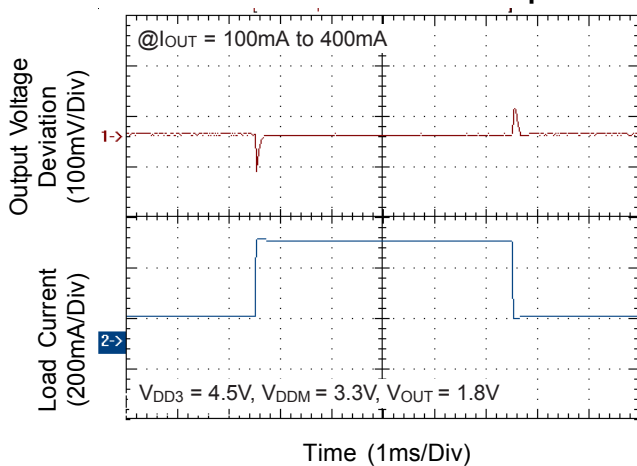


**Buck3 LX & Output Ripple**

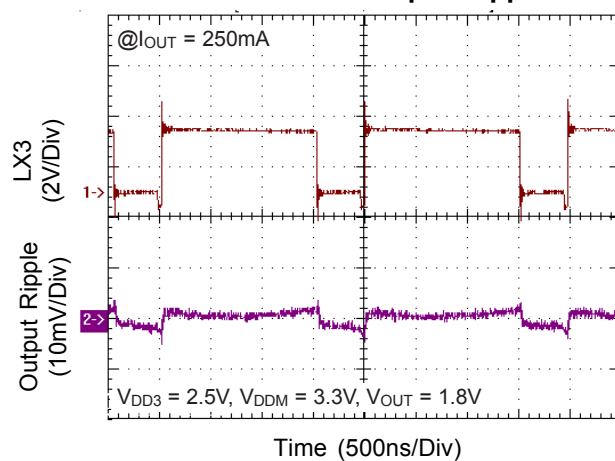


Buck3 LX &amp; Output Ripple

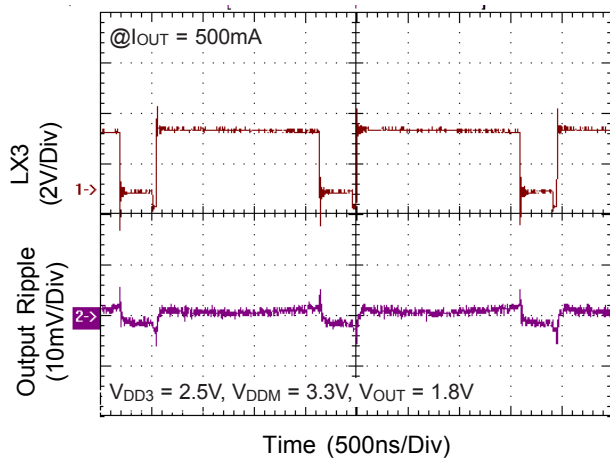


Buck3 LX &amp; Output Ripple

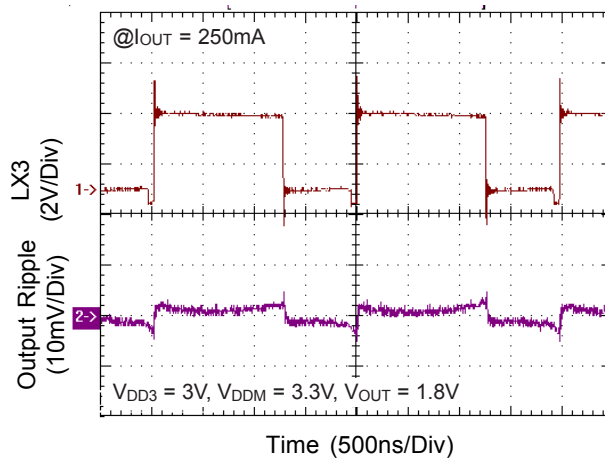


Buck3 LX &amp; Output Ripple

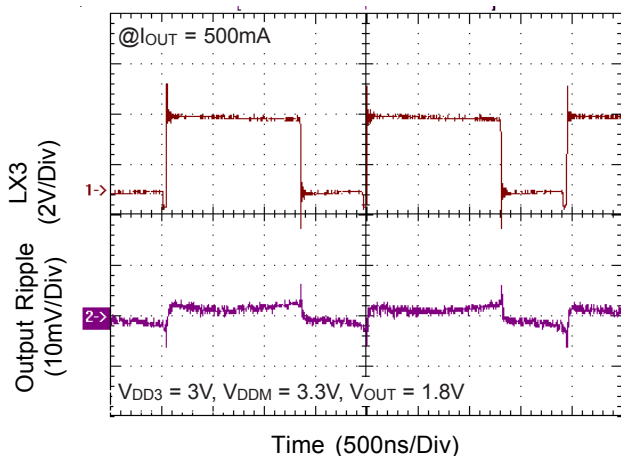


Buck3 LX &amp; Output Ripple

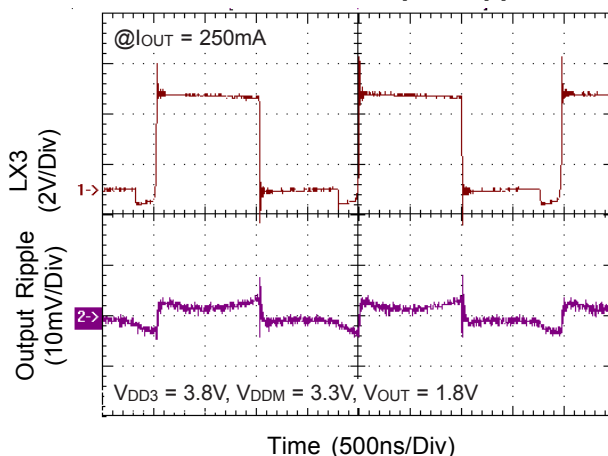

Buck3 LX &amp; Output Ripple

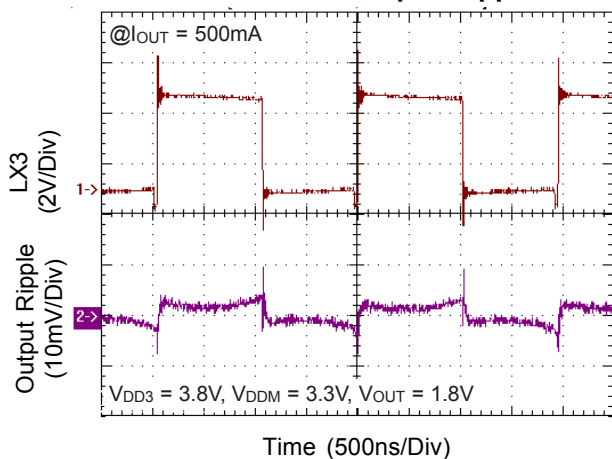


Buck3 LX &amp; Output Ripple

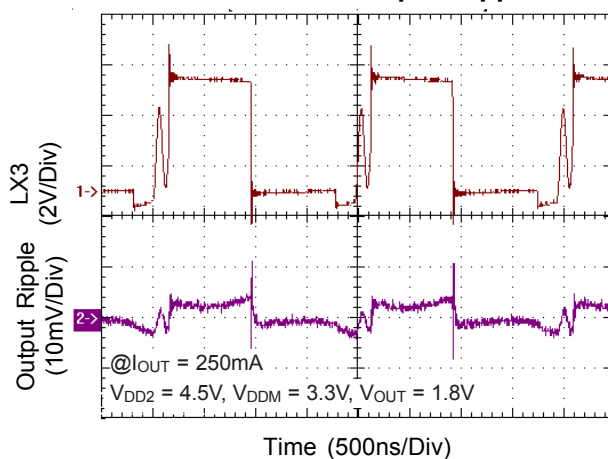





Buck3 LX & Output Ripple

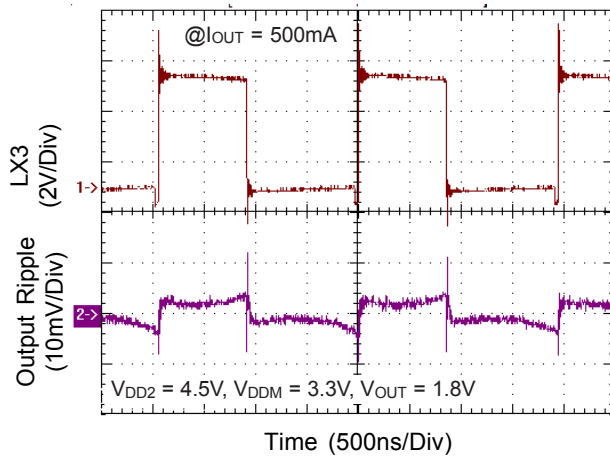


Charge Pump CX & Output Ripple

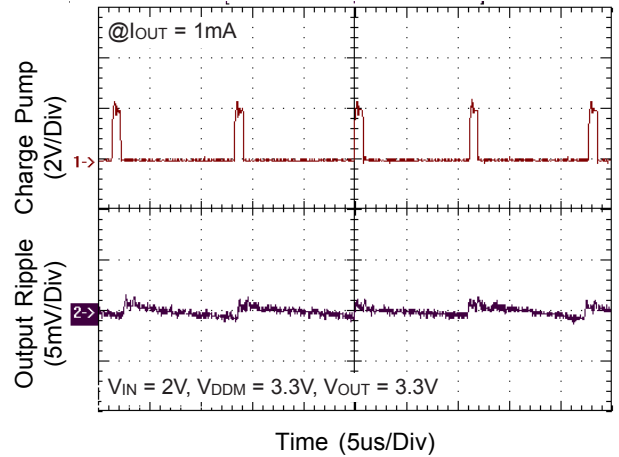


Charge Pump CX & Output Ripple

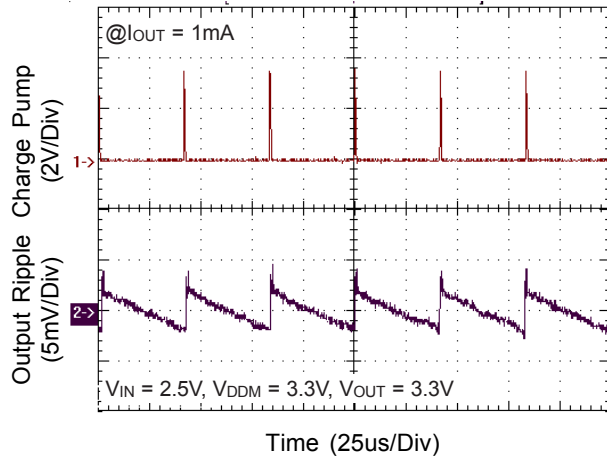


Linear Controller Load Transient Response



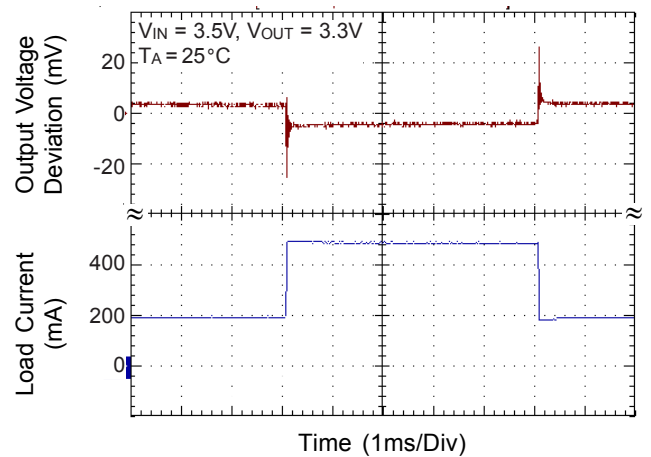


Linear Controller Load Transient Response

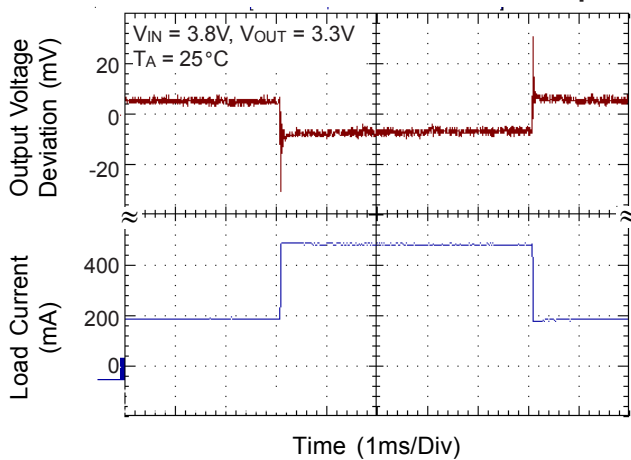

Linear Controller Load Transient Response

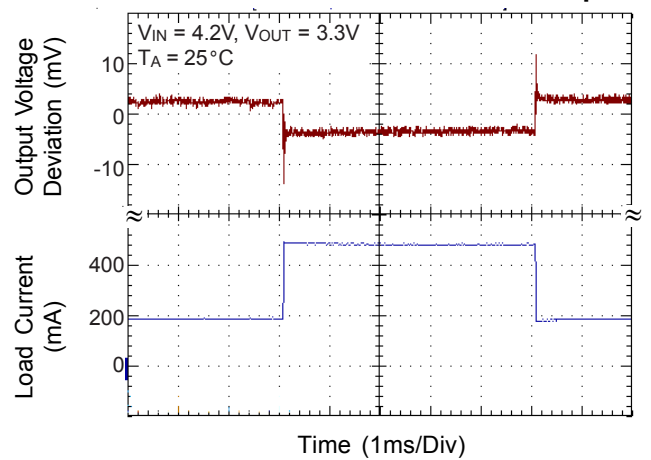

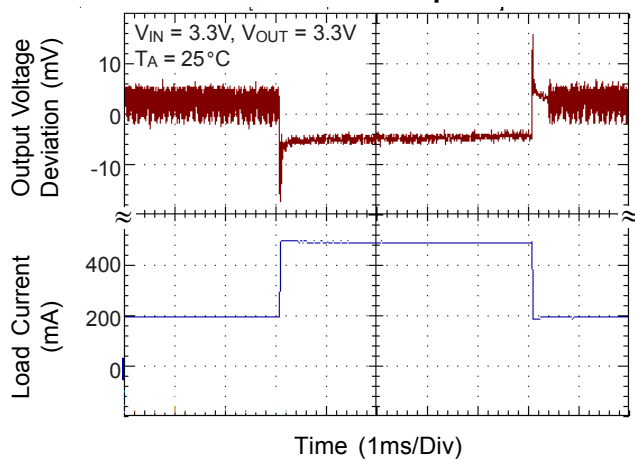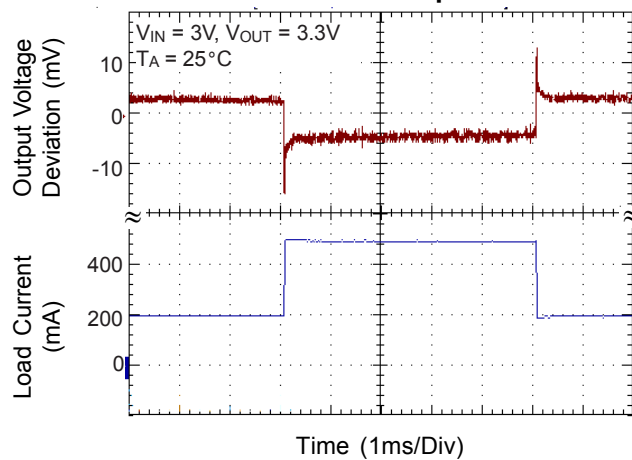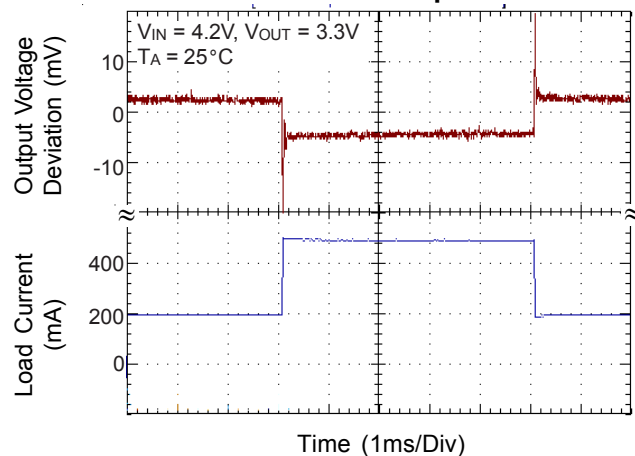**Boost Series Linear Controller Load  
Transient Response****Boost Series Linear Controller Load  
Transient Response****Boost Series Linear Controller Load  
Transient Response**

## Application Information

The RT9902 is a four-channel DC/DC converter with one linear controller for digital still cameras and other hand-held device. The four channels DC/DC converters are as follows:

CH1: Step-up, asynchronous current mode DC/DC converter with an internal power MOSFET, current limit protection and high efficiency control for wide loading range.

CH2: Step-down, synchronous current mode DC/DC converter with internal power MOSFETs, current limit, short-circuit, over voltage protection and high efficiency control for wide loading range.

CH3: Step-down, synchronous current mode DC/DC converter with internal power MOSFETs, current limit, short-circuit protection and high efficiency control for wide loading range.

CH4: Charge pump DC/DC converter.

### Soft-Start

CH1, CH2 and CH3 can be soft-started individually every time when the channel is enabled. Soft-start is achieved by ramping up the voltage reference of each channel's input of error amplifier. Adding a capacitor on SS pin to ground sets the ramping up speed of each voltage reference. Triangle wave will be appeared on SS pin, which provides a clock base for soft-start.

The soft-start timing would be settled by following formular.

$$T_{SS} = 10 \times \frac{C_{SS}}{1nF} \text{ (ms)}$$

### Oscillator

The internal oscillator synchronizes CH1, CH2 and CH3 PWM operation frequency. The operation frequency is set by a resistor between RT pin to ground, ranging from 550kHz to 1.4MHz.

### Step-up (Boost) DC/DC Converter (CH1)

The step-up channel (CH1) is designed as current-mode DC/DC PWM converters with built-in internal power MOS and external schottky diode. Output voltage is regulated and adjustable up to 5.5V. This channel typically supplies 3.3V for main system power.

At light load, efficiency is enhanced by pulse-skipping mode. In this mode, the NMOS turns on by a constant pulse width. As loading increased, the converter operates at constant frequency PWM mode. The maximum duty of the constant frequency is 80% for the boost to prevent high input current drawn from input.

### Protection

#### Current Limit

The current of NMOS is sensed cycle by cycle to prevent over current. If the current is higher than 2.6A (typical), then the NMOS is off. This state is latched and then reset automatically at next clock cycle.

#### Under Voltage

The status of under voltage is decided by comparing FB1 voltage with 0.4V. This function is enabled after soft-start finishes. If the FB1 voltage is less than 0.4V, then the NMOS will be turned off immediately. And this state is latched. After a dummy count period, the controller begins a re-soft-start procedure.

If the status of under voltage remains after 4 successive times of soft-start, then CH1 is latched.

#### Over Voltage

The over voltage protection is used when the output of CH1 supplies the power of the main chip. If the output voltage of CH1 is over 6.5V, the main chip is shutdown and the NMOS is kept off.

### Step-Down (Buck) DC/DC Converter (CH2, CH3)

The step-down channels (CH2, CH3) are designed as synchronous current-mode DC/DC PWM converters. Output voltage is regulated and adjustable down to 0.8V. The internal synchronous power switches eliminate the typical schottky free wheeling diode and improve efficiency.

At light load, efficiency is enhanced by pulse-skipping mode. In this mode, the high-side PMOS turns on by a constant pulse width. As loading increased, the converter operates at constant frequency PWM mode. While the input voltage is close to output voltage, the converter enters low dropout mode. Duty could be as long as 100% to extend battery life.

## Protection

### Current Limit (CH2, CH3)

The current of high-side PMOS is sensed cycle by cycle to prevent over current. If the current is higher than 1.5A (typical), then the high-side PMOS is off and the low-side NMOS is on. This state is latched and then reset automatically at next clock cycle.

### Under Voltage (CH2, CH3)

The status of under voltage is decided by comparing FB2 (or FB3) voltage with 0.4V. This function is enabled after soft-start finishes. If the FB2 (or FB3) voltage is less than 0.4V, then the high/low-side power MOS are turned off immediately. And this state is latched. After a dummy count period, the CH2 (or CH3) begins a soft-start procedure.

However, if the status of under voltage remains after 3 successive times of soft-start, then CH2 (or CH3) is latched.

|     | UV remain after 3 successive soft-start   | How to reset?     |
|-----|-------------------------------------------|-------------------|
| CH2 | CH2 is latched, and whole IC is shut down | Toggle ENM        |
| CH3 | CH3 is latched                            | Toggle EN3 or ENM |

### Over Voltage Protection (CH2)

Over voltage protection (OVP) is used to protect the external parts connected to the output of CH2. If the FB2 voltage is higher than 1V, the high-side PMOS is off and low-side NMOS is on. This status is latched and could be reset by toggling ENM.


### Charge Pump DC/DC Converter

This is a low quiescent charge pump DC/DC converter, which is enabled by ENM. Add a capacitor  $C_X$  (~1nF) between charge pump  $V_{OUT}$  and  $CP_{FB}$  to speed up charge pump response time. Output ripple can be easily suppressed by increasing the capacitance ratio of  $C_{OUT}$  and  $C_{CP}$ . This charge pump DC/DC converter can apply to  $\mu C$  standby power or the gate driver power of IGBT for photoflash, etc.

The maximum output current can be determined by  $C_{CP}$  and  $C_{OUT}$  ratio. This equation would describe the relationship.

$$I_{MAX} = 2 \times (V_{DDC} - V_F) \times C_{CP} \times F_{CP}$$

- $V_F$  : Schottky diode forward voltage
  - $F_{pump}$  : Charge pump maximum frequency is 500kHz
- Recommend  $C_{CP} \leq 0.1\mu F$ .

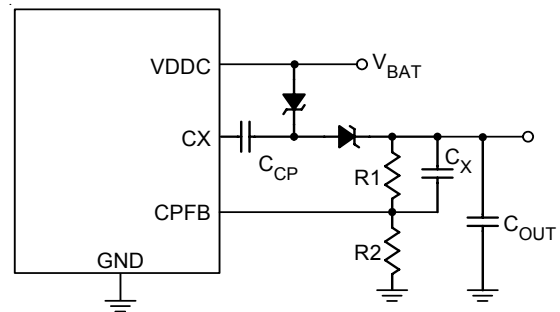


## Reference

The chip has an internal 0.8V reference voltage, which is the inputs of the error amplifiers of the CH1, CH2, and CH3 to compare the difference of feedback voltage. The reference voltage can be set up stably when the supplied power ( $V_{DDM}$ ) is above 1.5V, and EN1 (or EN2, EN3) goes high.

## Thermal Protection

Thermal protection function is integrated in the chip. When the chip temperature is higher than 178 °C, the controllers of CH1, CH2, and CH3 are shutdown. 10°C is the hysteresis range of temperature to prevent unstable operation when the thermal protection happens. When the thermal protection is relieved, the chip operates well again.

# Outline Dimension

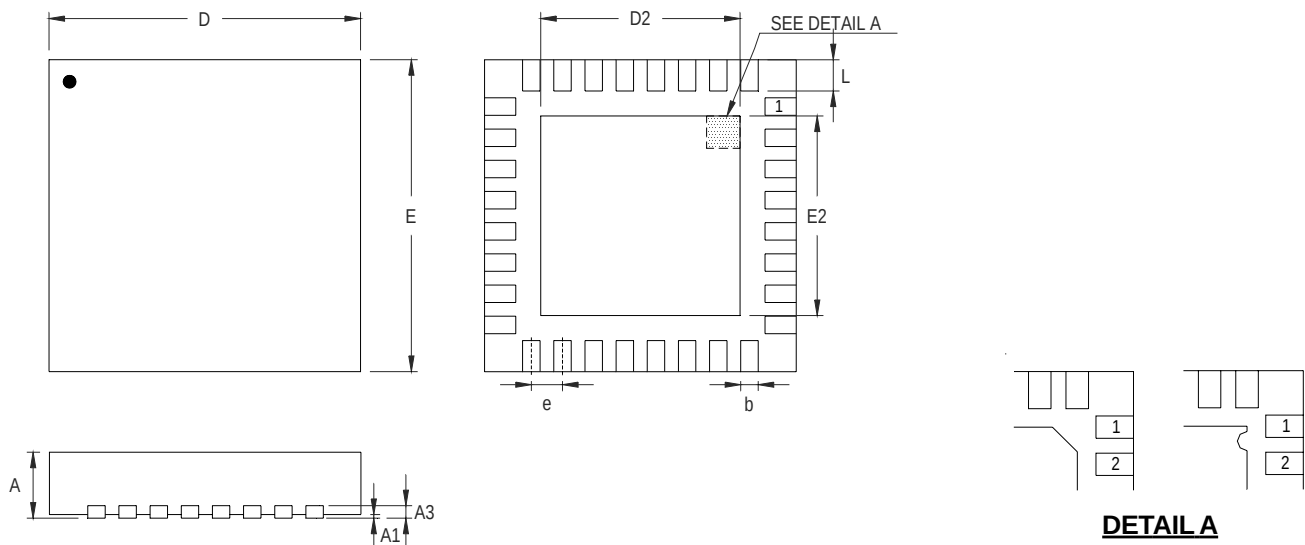

Pin #1 ID and Tie Bar Mark Options

Note : The configuration of the Pin #1 identifier is optional, but must be located within the zone indicated.

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.800                     | 1.000 | 0.031                | 0.039 |
| A1     | 0.000                     | 0.050 | 0.000                | 0.002 |
| A3     | 0.175                     | 0.250 | 0.007                | 0.010 |
| b      | 0.180                     | 0.300 | 0.007                | 0.012 |
| D      | 4.950                     | 5.050 | 0.195                | 0.199 |
| D2     | 3.400                     | 3.750 | 0.134                | 0.148 |
| E      | 4.950                     | 5.050 | 0.195                | 0.199 |
| E2     | 3.400                     | 3.750 | 0.134                | 0.148 |
| e      | 0.500                     |       | 0.020                |       |
| L      | 0.350                     | 0.450 | 0.014                | 0.018 |

V-Type 32L QFN 5x5 Package

## Richtek Technology Corporation

Headquarter

5F, No. 20, Taiyuen Street, Chupei City

Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789 Fax: (8863)5526611

## Richtek Technology Corporation

Taipei Office (Marketing)

8F, No. 137, Lane 235, Paochiao Road, Hsintien City

Taipei County, Taiwan, R.O.C.

Tel: (8862)89191466 Fax: (8862)89191465

Email: marketing@richtek.com