

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE: 20 - 100 V
FORWARD CURRENT: 3.0 A


FEATURES

- ◇ Schottky barrier rectifier
- ◇ Guardring protection
- ◇ Low forward voltage
- ◇ Reverse energy tested
- ◇ High current capability
- ◇ Extremely low thermal resistance

MECHANICAL DATA

- ◇ Case: SMB molded plastic body
- ◇ Polarity: Color band denotes cathode end
- ◇ Mounting position: ANY
- ◇ Weight: 0.003 ounces, 0.093 gram

SMB

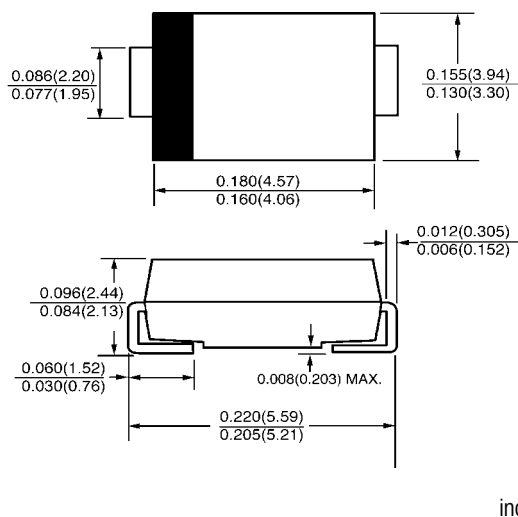

inch(mm)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

		SK32B	SK33B	SK34B	SK35B	SK36B	SK38B	SK39B	SK3A0B	UNITS
Device marking code		SK32B	SK33B	SK34B	SK35B	SK36B	SK38B	SK39B	SK3A0B	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	90	100	V
Maximum RMS voltage	V _{RWS}	14	21	28	35	42	56	63	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	90	100	V
Maximum average forward rectified current at T _L =90°C	I _{F(AV)}	3.0								A
Peak forward surge current 8.3ms single half-sine-wave	I _{FSM}	100.0								A
Maximum instantaneous forward voltage at I _{FM} =3.0A (NOTE1)	V _F	0.50			0.70		0.85			V
Maximum DC reverse current T _J =25°C at rated DC blocking voltage T _J =100°C	I _R	0.5 20.0								mA
Maximum thermal resistance	R _{θJL}	17.0								°C/W
Operating temperature range	T _J	- 55 ---- +125								°C
Storage temperature range	T _{STG}	- 55 ---- +150								°C

NOTE: 1.Pulse test: Pulse width 300us,duty cycle 1 %

www.galaxycn.com

FIG.1 -- FORWARD DERATING CURVE

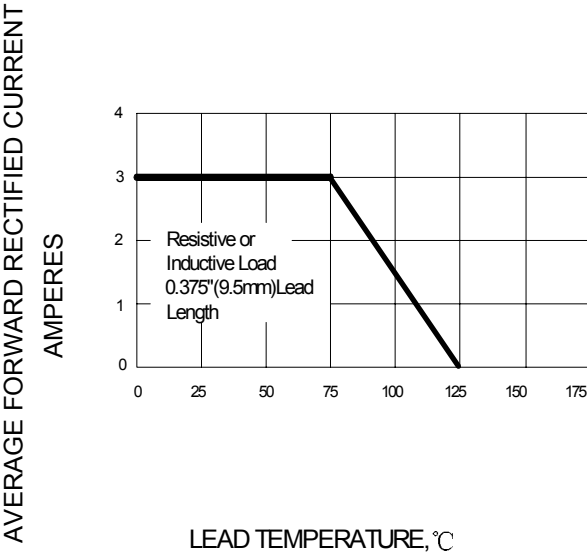


FIG.2 -- PEAK FORWARD SURGE CURRENT

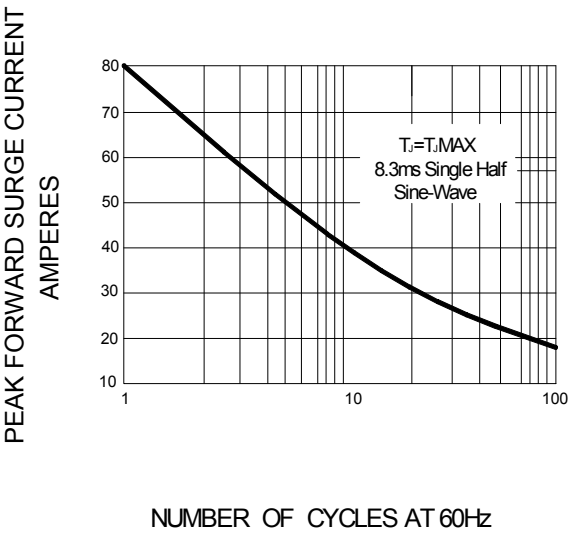


FIG.3 -- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

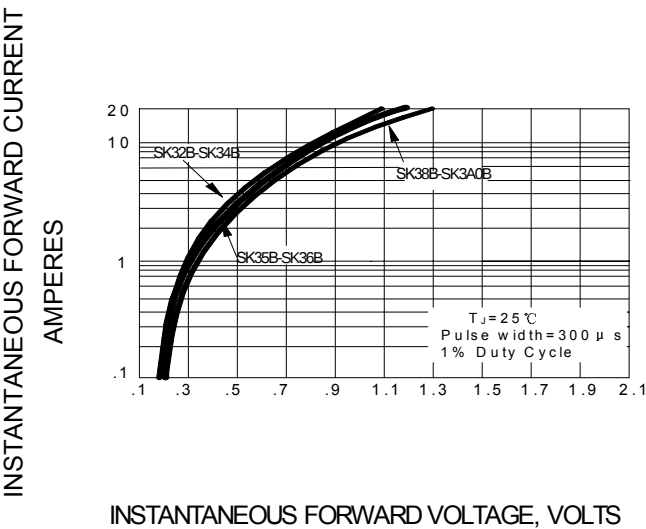


FIG.4 -- TYPICAL JUNCTION CAPACITANCE

