

# SMT15C Series

5 Vin and 12 Vin single output

**NEW Product**



- **15 A current rating**
- **Input voltage range: 4.5 Vdc to 5.5 Vdc or 10.2 Vdc to 13.8 Vdc**
- **Output voltage range: 0.9 Vdc - 3.3/5.0 Vdc**
- **Industry leading value**
  - Cost optimized design
- **Excellent transient response**
- **Output voltage adjustability**
  - Pathway for future upgrades
  - Supports silicon voltage migration
  - Resulting in reduced design-in and qualification time
- **Designed in reliability: MTBF of >7 million hours per Telcordia SR-332**
- **Available RoHS compliant**



The SMT15C series is a new high density open-frame, non-isolated converter for space sensitive applications. Each model has a wide input range (4.5 Vdc to 5.5 Vdc or 10.2 Vdc to 13.8 Vdc) and offers a wide 0.9 Vdc to 5.0 Vdc output voltage range with a 15 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 V to any value up to the 5 V maximum. Typical efficiencies for the models are 89% for the 5 V input version and 91% for the 12 V input version. The series offers remote ON/OFF and overcurrent protection as standard. With full international safety approvals including EN60950 and UL/cUL60950, the SMT15C reduces compliance costs and time to market.



**2 YEAR WARRANTY**

*All specifications are typical at nominal input Vin = 12 V, full load at 25 °C unless otherwise stated*

## SPECIFICATIONS

### OUTPUT SPECIFICATIONS

Voltage adjustability (See Note 7)	5 Vin 12 Vin	0.9-3.3 Vdc 0.9-5.0 Vdc
Output setpoint accuracy	1.0% trim resistors	±2.5%
Line regulation	Low line to high line	±0.2%
Load regulation	Full load to min. load	±0.5%
Min/max load		0 A/15 A
Overshoot (at turn-on)	5 Vin 12 Vin	3.0% max. 1.0% max.
Undershoot	At turn-off	100 mV max.
Ripple and noise 5 Hz to 20 MHz	(See Note 6)	See Table on page 2
Transient response (See Note 1)		100 mV max. deviation 200 µs recovery to within regulation band

### INPUT SPECIFICATIONS

Input voltage range	5 Vin 12 Vin	4.5-5.5 Vdc 10.2-13.8 Vdc
Input current	Minimum load Remote ON/OFF	65 mA 20 mA
Input current (max.) (See Note 9)	5 Vin 12 Vin	11.5 A max. @ Io max. 8.1 A @ Io max.
Input reflected ripple (See Note 2)	5 Vin 12 Vin	200 mA (pk-pk) 200 mA (pk-pk)
Remote ON/OFF Logic compatibility ON OFF		Positive logic >2.4 Vdc <0.8 Vdc
Start-up time (See Note 3)	Power-up Remote ON/OFF	<20 ms <20 ms

### INPUT SPECIFICATIONS (CONTD.)

Turn ON threshold	5 Vin 12 Vin	4.5 Vdc typ. 9.3 Vdc typ.
Turn OFF threshold	5 Vin 12 Vin	4.3 Vdc typ. 7.8 Vdc typ.

### GENERAL SPECIFICATIONS

Efficiency	See Table on page 2	
Switching frequency	Fixed	200 kHz
Approvals and standards	(See Note 4)	TÜV Product Services IEC60950, UL/cUL60950
Material flammability	UL94V-0	
Weight	14.2 g (0.5 oz)	
Coplanarity	150 µm	
MTBF	Telcordia SR-332	7,817,294 hours

### ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Note 10)	Operating ambient, temperature Non-operating	0 °C to +80 °C -40 °C to +125 °C
--------------------------------------	--	-------------------------------------

### PROTECTION

Short-circuit	Hiccup, non-latching
---------------	----------------------

### RECOMMENDED SYSTEM CAPACITANCE

Input capacitance	(See Note 11)	270 µF/20 mΩ ESR max.
Output capacitance	(See Note 11)	680 µF/10 mΩ ESR max.

# SMT15C Series

5 Vin and 12 Vin single output



DC-DC CONVERTERS | C Class Non-isolated


2

For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

**NEW Product**

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (TYP.)	REGULATION		MODEL NUMBER <sup>(12,13)</sup>
						LINE	LOAD	
50 W	4.5-5.5 Vdc	0.9-3.3 Vdc	0 A	15 A	89%	±0.2%	±0.5%	SMT15C-05SADJJ
75 W	10.2-13.8 Vdc	0.9-5.0 Vdc	0 A	15 A	91%	±0.2%	±0.5%	SMT15C-12SADJJ

## Part Number System with Options

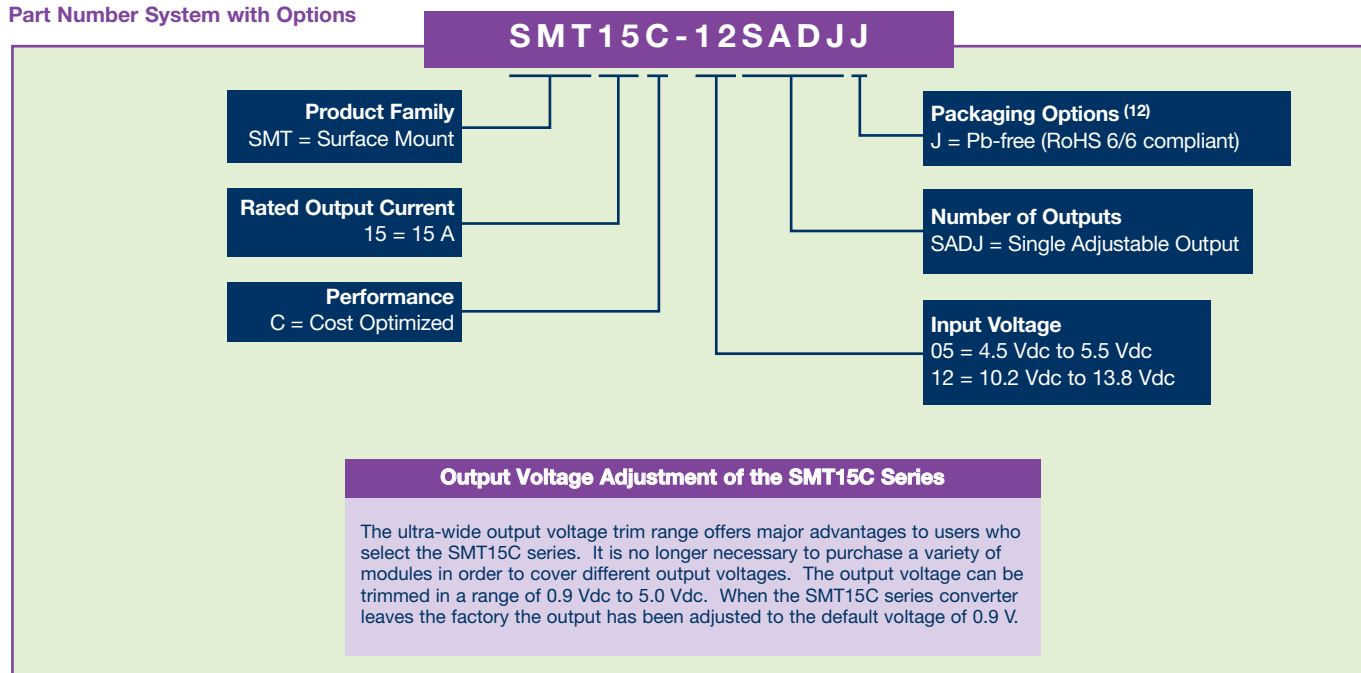

## Notes

- 1  $di/dt = 10 \text{ A}/\mu\text{s}$ ,  $V_{in} = \text{Nom}$ ,  $T_c = 25^\circ\text{C}$ , load change = 0.50  $I_o$  max. to 0.75  $I_o$  max, and vice versa.
- 2 Measured with external filter. See Application Note 169 for details.
- 3 Power up is the time from application of dc input to POWER GOOD high. Remote ON/OFF asserted high to POWER GOOD high.
- 4 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 5 Reserved.
- 6 Measured as per recommended set-up.  $C_{in} = 270 \mu\text{F}$  (20mΩ ESR max.),  $C_{out} = 680 \mu\text{F}$  (10 mΩ ESR max.).
- 7 Uses external resistor from TRIM to ground. See Application Note 169 for details. Minimum value 485  $\mu\text{F}$  for 5 V model, 280  $\mu\text{F}$  for 12 V model.
- 8 Signal line assumed <3 m in length.
- 9 External input fusing recommended.
- 10 See Application Note 169 for operation above 50  $^\circ\text{C}$ .
- 11 See Application Note 169 for more details.
- 12 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 13 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

## Ripple and Noise Specification

Model	Output Voltage	Pk - Pk	RMS
5 V input models	0.9 Vdc to 2.5 Vdc	30 mV	15 mV
	3.3 Vdc	40 mV	15 mV
12 V input models	0.9 Vdc to 2.5 Vdc	50 mV	25 mV
	3.3 Vdc to 5 Vdc	50 mV	25 mV

## International Safety Standard Approvals




UL/cUL CAN/CSA 22.2 No. 60950  
UL 60950 File No. E139421



TÜV Product Service (EN60950:2000)  
Certificate No. B 04 08 19870 228  
CB report and certificate to US/6415C/UL

# SMT15C Series

5 Vin and 12 Vin single output

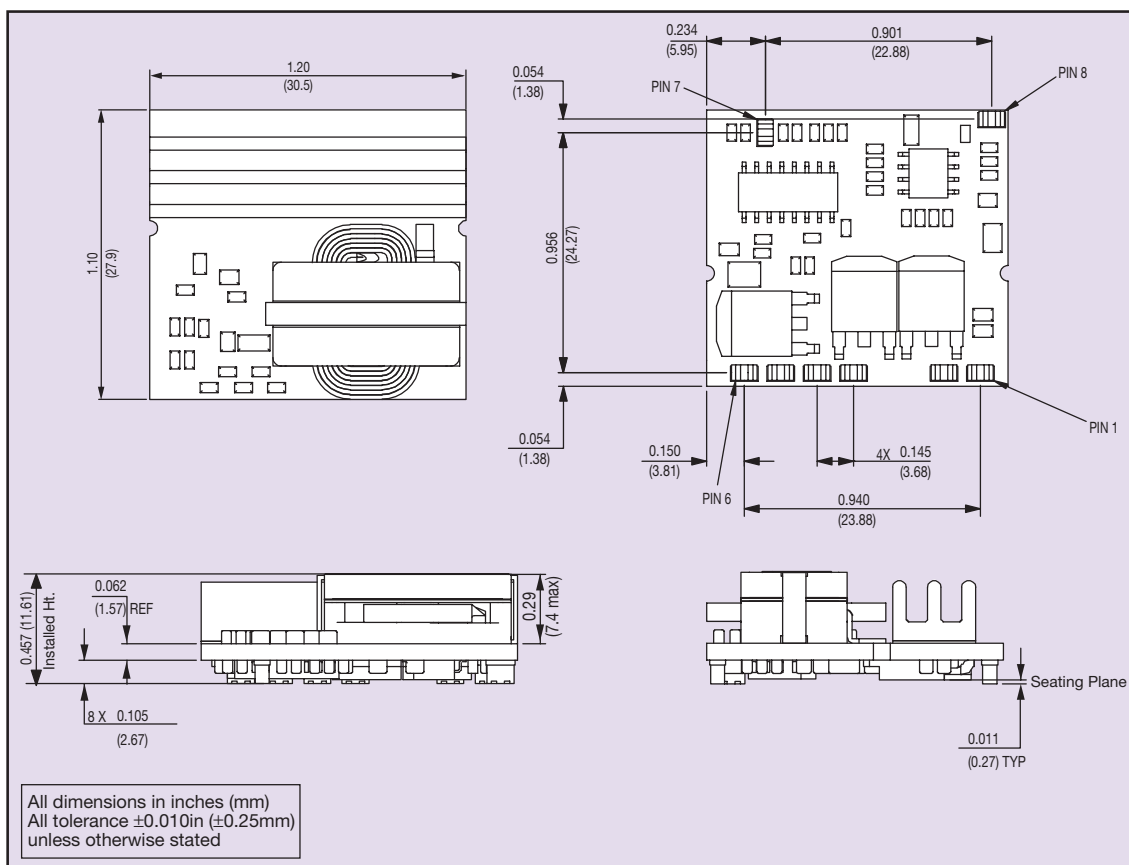

PIN CONNECTIONS	
PIN NUMBER	FUNCTION
1	Vout
2	Vout
3	Power Good
4	GND
5	GND
6	Vin
7	Trim
8	Remote ON/OFF