

**Solid State Devices, Inc.**

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

**SPD2520
thru
SPD2540****Designer's Data Sheet****Part Number / Ordering Information^{1/}**

SPD 252
0

L Screening^{2/}

TX = TX Level
TXV = TXV Level,
S = S-Level
___ = Not Screened

L Package

___ = Axial (DO-35)
SMS = Surface Mount Square Tab

Voltage / Family

2520 = 20V
2530 = 30V
2540 = 40V

**0.5 AMP
20-40 VOLTS
SCHOTTKY RECTIFIER****FEATURES:**

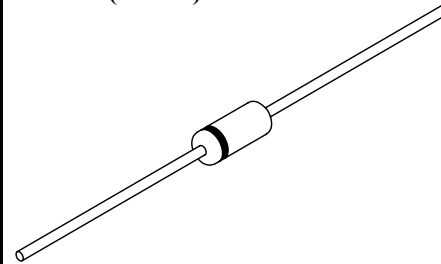
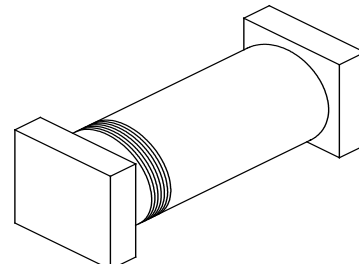
- Extremely Low Forward Voltage Drop
- High Surge Capability
- Hermetically Sealed
- Axial or Surface Mount Packages
- TX, TXV, and Space Level Screening Available

MAXIMUM RATINGS		Symbol	Value	Units
Peak Repetitive Reverse Voltage and DC Blocking Voltage	SPD2520	V_{RRM}	20	Volts
	SPD2530	V_{RWM}	30	
	SPD2540	V_R	40	
Average Rectified Forward Current (Resistive Load, 60 Hz, Sine Wave, $T_A=25^{\circ}\text{C}$)		I_O	0.5	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on I_O , allow junction to reach equilibrium between pulses, $T_A=25^{\circ}\text{C}$)		I_{FSM}	10	Amps
Operating and Storage Temperature		$T_{OP} \text{ \& } T_{stg}$	-65 to +150	$^{\circ}\text{C}$
Maximum Thermal Resistance Junction to Lead, $L = 3/8''$		$R_{\theta JL}$	190	$^{\circ}\text{C/W}$

NOTES:

^{1/} For ordering information, price, and availability, contact factory.

^{2/} Screening per MIL-PRF-19500.

AXIAL (DO-35)**SMS**

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RS0109D**DOC**

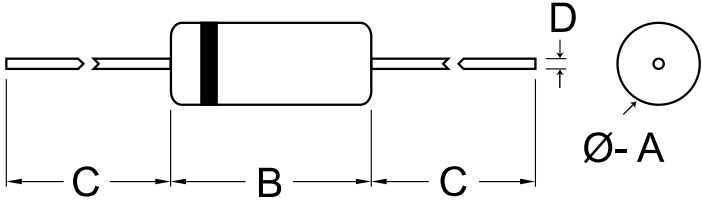


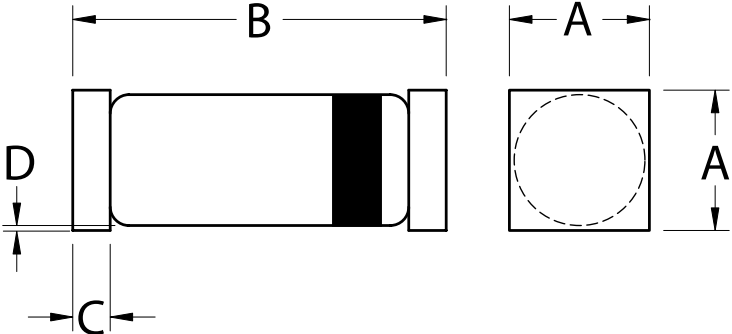
Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

**SPD2520
thru
SPD2540**

ELECTRICAL CHARACTERISTICS		Symbol	Max	Unit
Instantaneous Forward Voltage Drop ($I_F = 1A_{DC}$, $T_A = 25^\circ C$, 300-500 μs Pulse)	$I_F = 100mA_{DC}$	V_{F1}	0.5	Volts
	$I_F = 500mA_{DC}$	V_{F2}	0.75	
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ C$, 300 μs minimum Pulse)		I_{R1}	5	μA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ C$, 300 μs minimum Pulse)		I_{R2}	1	mA
Junction Capacitance ($V_R = 10 V_{DC}$, $T_A = 25^\circ C$, $f = 1 MHz$)		C_J	10	pF

AXIAL CASE OUTLINE: (DO-35)		DIMENSIONS		
		CODE	MIN.	MAX.
		A	.060"	.080"
		B	.140"	.160"
		C	1.00"	---
		D	.018"	.022"
		Note: Lead diameter is not controlled within 0.050" of the diode body.		

SMS CASE OUTLINE:		DIMENSIONS		
		CODE	MIN.	MAX.
		A	.092"	.098"
		B	.190"	.215"
		C	.022"	.028"
		D	.002"	---
		Note: Dimensions prior to solder dipping.		

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RS0109D

DOC