


Data Sheet

Features

- For CDMA basestation IF applications
- Usable bandwidth of 1.18 MHz
- Low loss
- High attenuation
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Small size


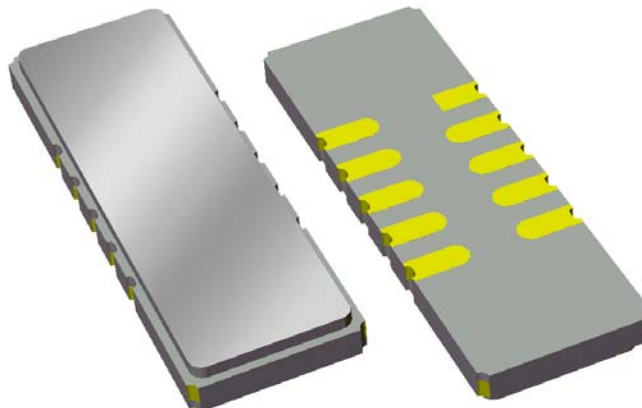


Package

Surface Mount 19.00 x 6.50 x 1.75 mm

Pin Configuration

Bottom View

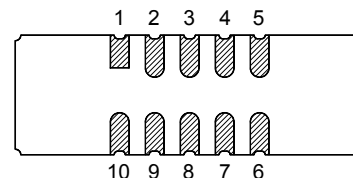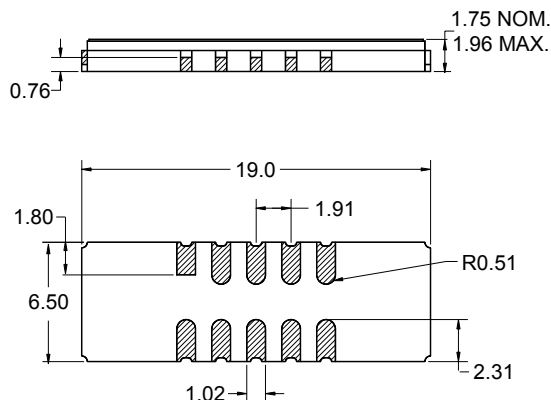

Pin No.	Description
1	Input
5	Output return
6	Output
10	Input return
2,3,4	Case ground
7,8,9	Case ground

Dimensions shown are nominal in millimeters
 All tolerances are ± 0.15 mm except overall
 length and width $+0.15$ mm / -0.10 mm

Body: Al_2O_3 ceramic
 Lid: Kovar, Ni plated
 Terminations: Au plating 0.5 - 1.0 μ m,
 over a 2 - 6 μ m Ni plating

Data Sheet

Electrical Specifications ⁽¹⁾


Operating Temperature Range: ⁽²⁾ 0 to +85 °C

Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Center Frequency, f_0	-	141	-	MHz
Insertion Loss at 141MHz	-	11.7	14	dB
Amplitude Variation 140.475 - 141.525 MHz	-	0.67	1	dB p-p
Attenuation				
139.75	42.5	48	-	dB
140.41	-	1	3.75	dB
141.59	-	1	3.75	dB
142.25	42.5	48	-	dB
Phase Linearity 140.37 - 141.63 MHz	-	1.2	2	Deg RMS
Average Delay 140.37 - 141.63 MHz	2.34	2.44	2.54	μsec
Group Delay Variation 140.475 - 141.525 MHz	-	145	300	nsec
Rejection				
79.75 - 139.75 MHz	42.5	>45	-	dB
142.25 - 202.25 MHz	42.5	>45	-	dB
Return Loss 140.475 - 141.525 MHz	10	13	-	dB
Source Impedance: ⁽⁴⁾	-	50	-	Ω
Load Impedance: ⁽⁴⁾	-	50	-	Ω

Notes:





1. All specifications are based on the test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance shown

Manual Test Circuit:

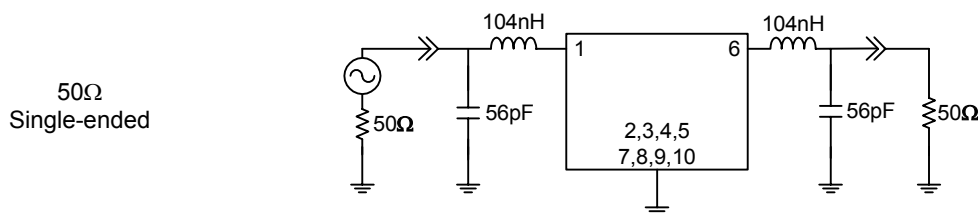


Data Sheet


Typical Performance (at +25°C)

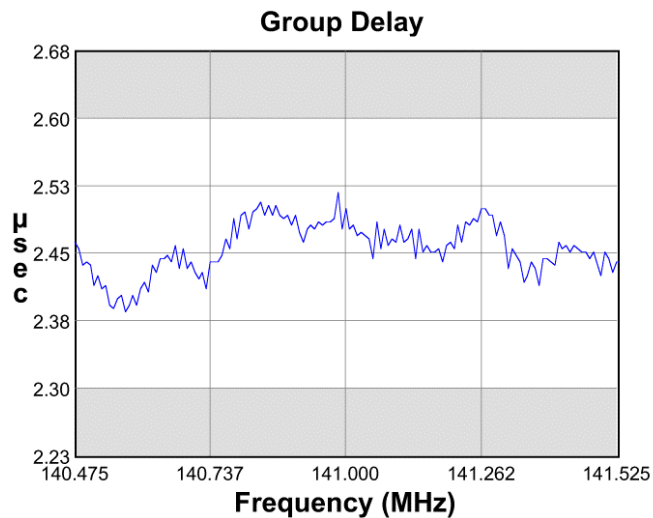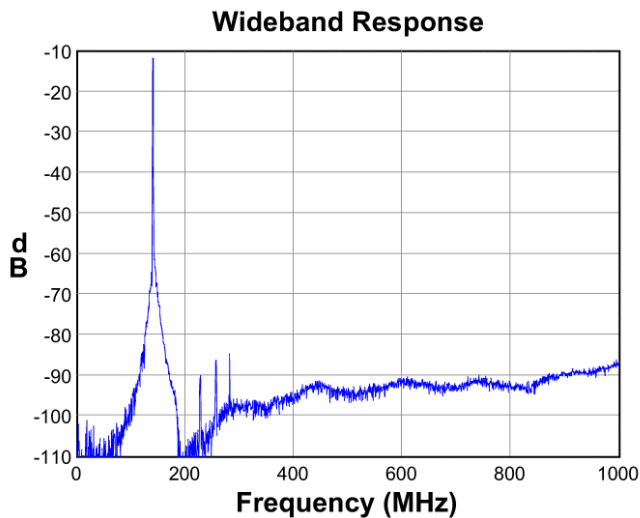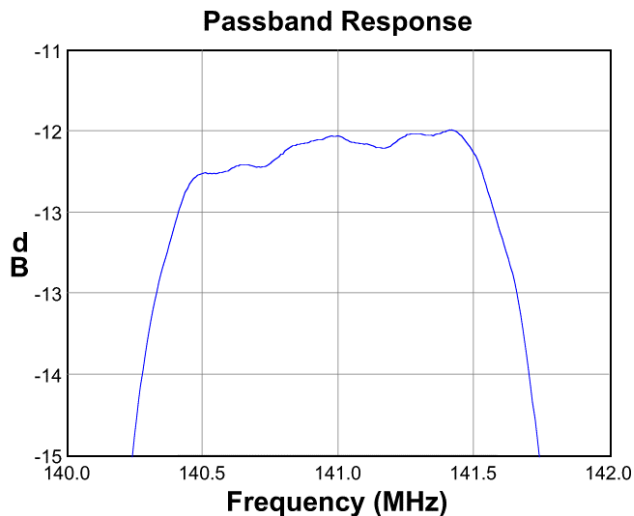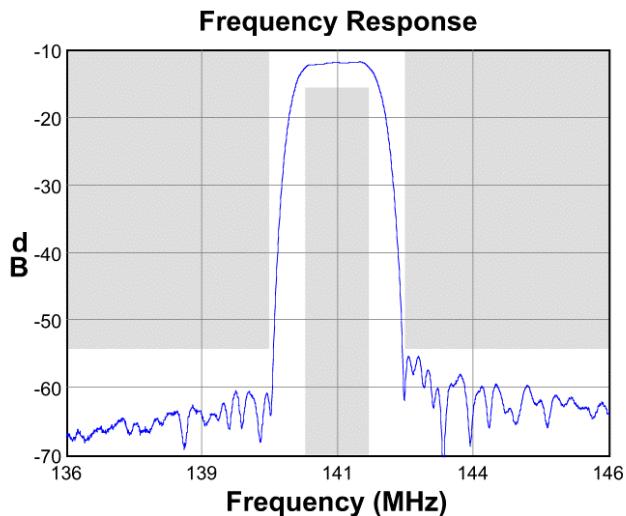

Input Smith Chart

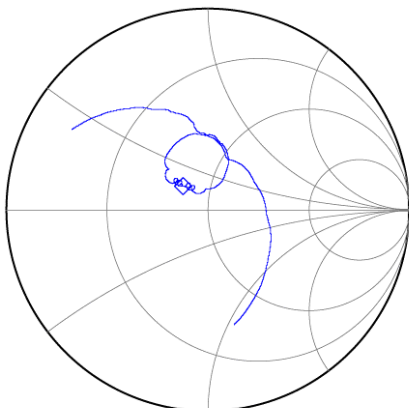


Output Smith Chart

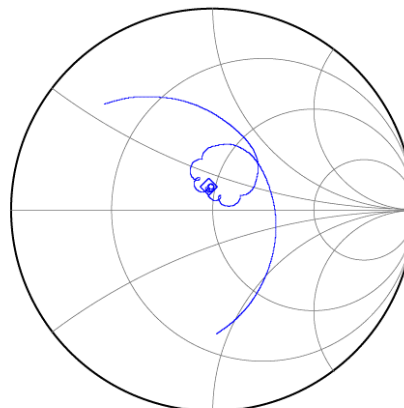


Data Sheet

Matching Schematics

Actual matching values may vary due to PCB layout and parasitics

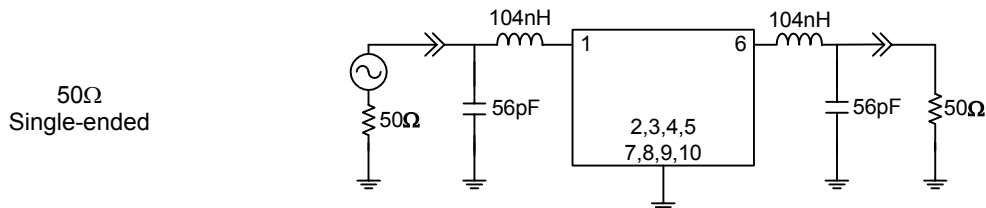


Marking

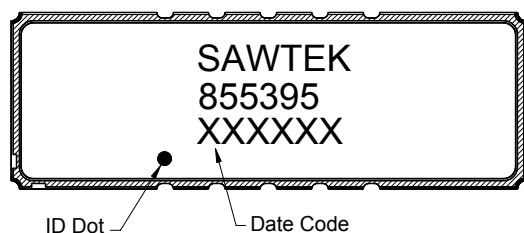



The date code consists of: day of the current year (Julian, 3 digits), last digit of the year (1 digit) and hour (2 digits)

PCB Footprint

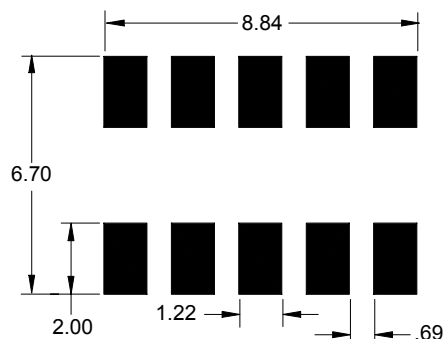

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

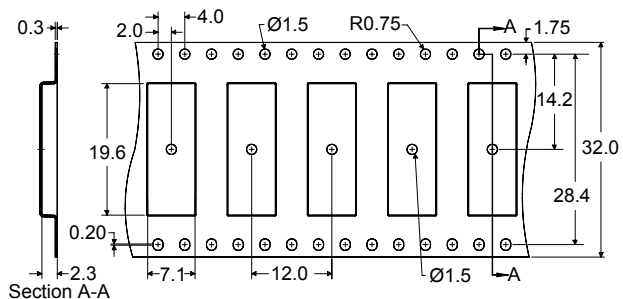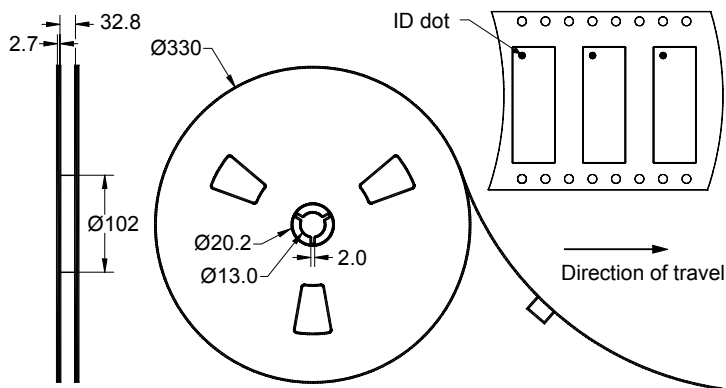

Dimensions shown are nominal in millimeters
Packaging quantity: 2000 units/reel

Data Sheet

Maximum Ratings

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature Range	T	0	+25	+85	°C
Storage Temperature Range	T _{stg}	-40	-	+85	°C

Warnings

- Electrostatic Sensitive Device (ESD)
- Avoid ultrasonic exposure



Links to Additional Technical Information

[PCB Layout Tips](#)[Qualification Flowchart](#)[Soldering Profile](#)[S-Parameters](#)[Other Technical Information](#)

Contact Information



PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: custservice@sawtek.com
Web: www.sawtek.com

Or contact one of our worldwide
network of [sales offices](#),
[representatives or distributors](#)