

VI TELEFILTER**Filter specification****TFS 130A****1/5****Measurement condition**

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedance: *
 Input: 470 Ω || -12,9 pF
 Output: 470 Ω || -12,9 pF

Characteristics**Remark:**

The reference level for the relative attenuation a_{rel} of the TFS 130A is the minimum of the pass band attenuation. This value is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 130,38 MHz without any tolerance. The values of relative attenuation a_{rel} are guaranteed for the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

D a t a		typ. value		tolerance / limit	
Insertion loss (reference level)	a_e	6,6	dB	max.	8 dB
Nominal frequency	f_N	-		130,38	MHz
Passband		-		$f_N \pm 0,665$	MHz
Pass band ripple		0,5	dB	max.	1 dB
Relative attenuation	a_{rel}				
f_N	$\dots f_N \pm 0,665$ MHz	-		max.	1 dB
$f_N - 20$ MHz	$\dots f_N - 5,75$ MHz	45	dB	min.	40 dB
$f_N + 5,75$ MHz	$\dots f_N + 9,87$ MHz	45	dB	min.	40 dB
$f_N + 9,87$ MHz	$\dots f_N + 10,87$ MHz	41	dB	min.	38 dB
$f_N + 10,87$ MHz	$\dots f_N + 20$ MHz	46	dB	min.	38 dB
Group delay	mean value in PB	770	ns	770 ± 10	ns
Group delay ripple within PB		50	ns	-	
Deviation from linear phase within PB		0,7	° rms	max.	2,5 ° rms
VSWR within PB		1,5	: 1	max.	2 : 1
Operating temperature range	OTR	-		- 30 °C ... + 80 °C	
Storage temperature range		-		- 40 °C ... + 85 °C	
Temperature coefficient of frequency	TC_f^{**}	-19	ppm/K	-	

*) The terminating impedances depend on parasites and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $\Delta f_c(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_0) \times f_{CAT}(\text{MHz})$.

Generated:**Checked / Approved:**

Tele Filter GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.



VI TELEFILTER

Filter specification

TFS 130A


2/5

Filter characteristic

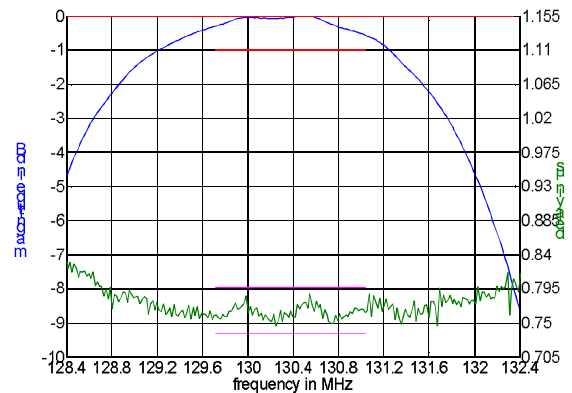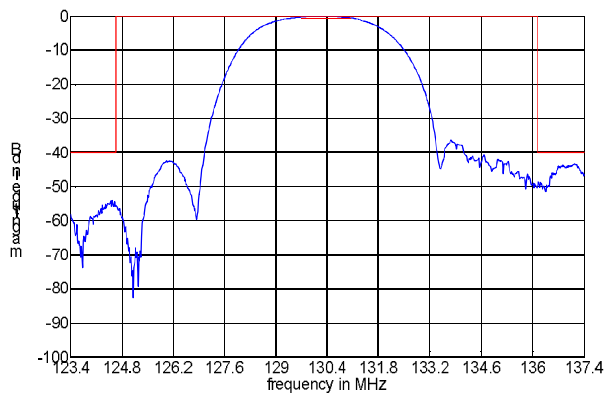

Construction and pin connection


(All dimensions in mm)

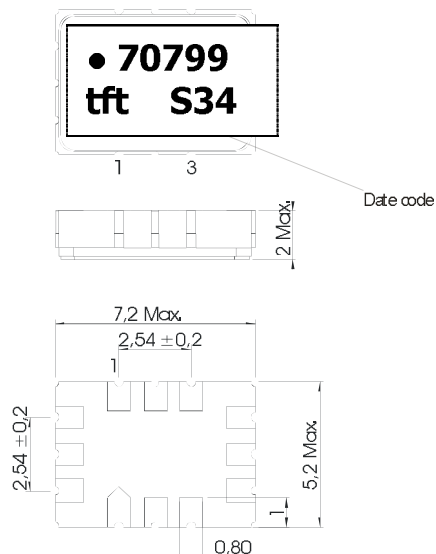

1	Input RF Return
2	Ground
3	Ground
4	Output
5	Ground
6	Output
7	Output RF Return
8	Ground
9	Ground
10	Ground
11	Ground
12	Input

Date code:	Year + week
S	2004
T	2005
U	2006
...	

50 Ω test circuit

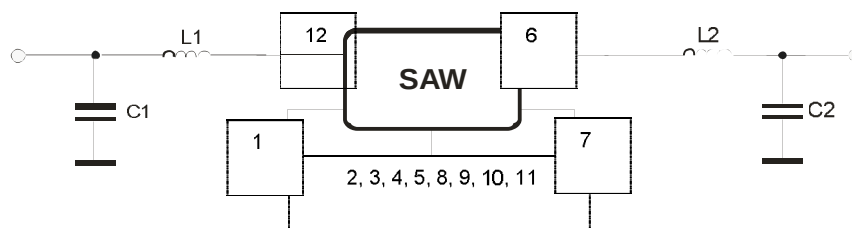

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER

Filter specification

TFS 130A

3/5

Stability characteristics

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters per reel: 3000
reel of empty components at start: min. 300 mm
reel of empty components at start including leader: min. 500 mm
trailer: min. 300 mm


Tape (all dimensions in mm)

W	: 16,00 ± 0,3
Po	: 4,00 ± 0,1
Do	: 1,50 +0,1/-0
E	: 1,75 ± 0,1
F	: 7,50 ± 0,1
G(min)	: 0,60
P2	: 2,00 ± 0,1
P1	: 8,00 ± 0,1
D1(min)	: 1,50
Ao	: 5,50 ± 0,1
Bo	: 7,50 ± 0,1
Ct	: 13,5 ± 0,1

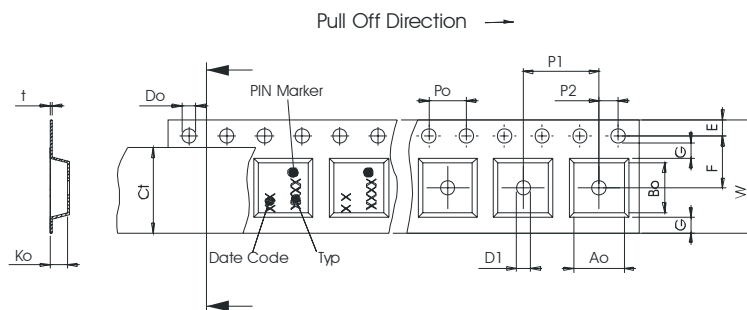

Reel (all dimensions in mm)

A	: 330
W1	: 16,4 +2/-0
W2(max)	: 22,4
N(min)	: 50
C	: 13,0 +0,5/-0,2

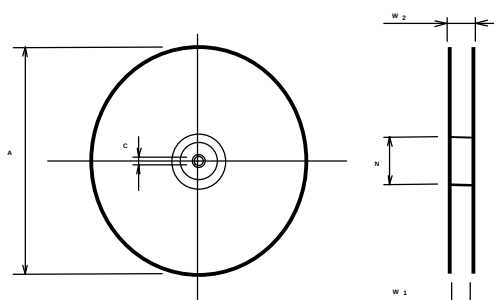

The minimum bending radius is 45 mm.

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 130A****4/5****Air reflow temperature conditions**

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

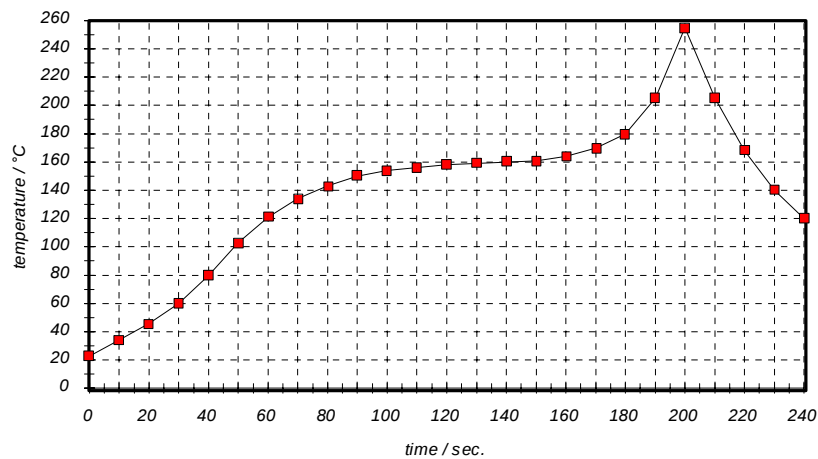
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Filter specification****TFS 130A****5/5****History**

Version	Reason of Changes	Name	Date
1.0	Generation of preliminary specification according to customer requirements.	Dunzow W.	03.05.1999
1.1	Generation of filter specification. Add typical values.	Dunzow W.	18.06.1999
1.2	Correct termination impedances. Change drawing of matching networks. Change tolerance values of mean value of group delay. Change marking of package.	Dunzow W.	17.05.2002
1.3	Change marking of package.	Springfeldt M.	30.03.2004
1.4	- labelling changed - filter characteristic added - change remark - remove centre frequency - Change tolerance values of mean value of group delay back to version 1.1	Pfeiffer	17.08.2004
1.5	- labelling corrected	Steiner	03.09.2004

Tele Filter GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.