


TACT SWITCHES

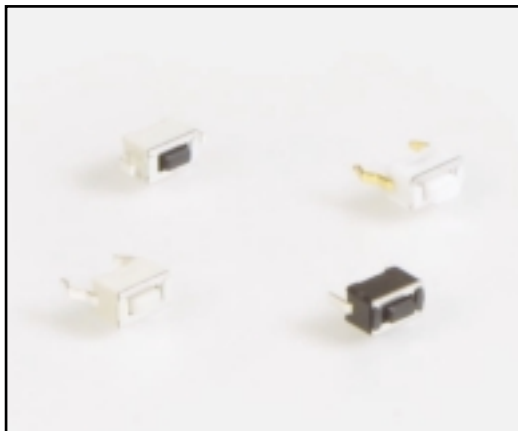


SPECIFICATIONS

Rating:	50mA@50 VDC
Electrical Life:	100,000 cycles
Contact Resistance:	100mΩ max., typical @ 2-4 VDC 100mA for both silver and gold plated contacts
Insulation Resistance:	1,000Ω min.
Dielectric Strength:	>1,000 V rms at sea level
Operating Force:	130 ± 50 gf, 180± 50 gf, 260 ± 50 gf

MATERIALS

Housing:	4/6 Nylon
Actuator:	4/6 Nylon
Cover:	Stainless steel
Contacts:	Silver or Gold Stainless steel
Terminals:	Silver or Gold plated brass

HOW TO ORDER

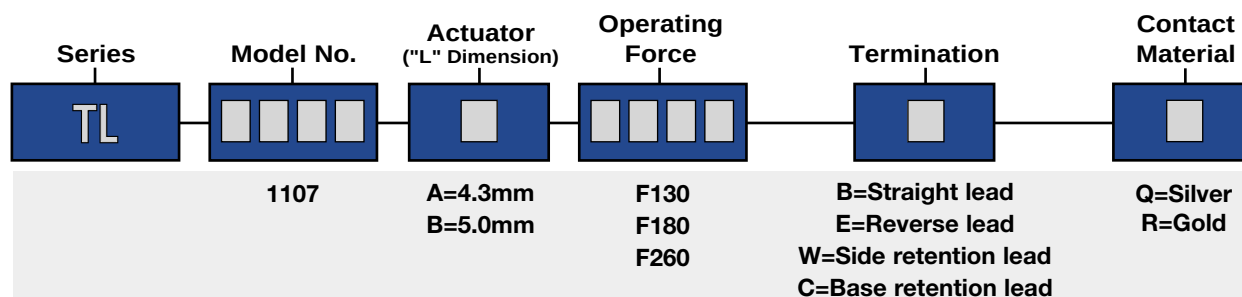

EXAMPLE

TL → 1107 → A → F130 → E → Q

ACTUATOR LENGTH (L)

Model No.	'L' Dim.
TL1107A	4.3mm
TL1107B	5.0mm

OPERATING FORCE



Operating Force
F130 = 130 ± 50gf
F180 = 180 ± 50gf
F260 = 260 ± 50gf

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


TERMINATION OPTIONS





TL1107
B Termination
(Straight Lead)




P.C. MOUNTING

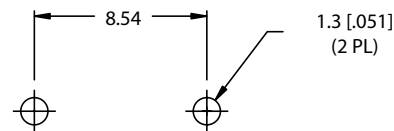



TL1107
E Termination
(Reverse Lead)

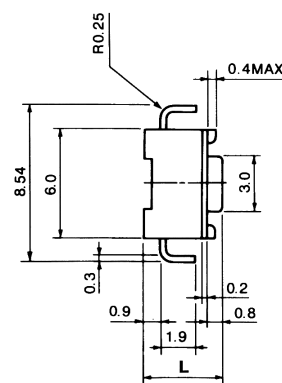


P.C. MOUNTING





TL1107
W Termination
(Side Retention Lead)




P.C. MOUNTING

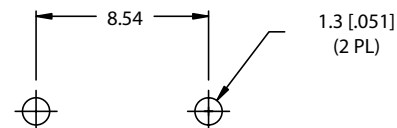

TL1107
C Termination
(Base Retention Lead)

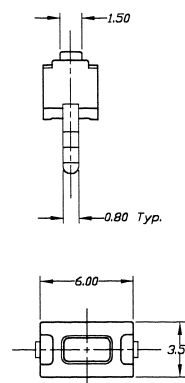

P.C. MOUNTING

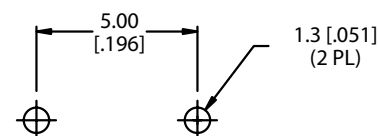

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.