

SMD Varistors

MLV; Arrays

SMD

Construction

- Multilayer technology
- Multiple elements in one component
- Termination: silver platinum
- No plastic or epoxy encapsulation assures better than UL 94 V-0 flammability rating

Features


- Sizes 0612, 0508, 0405
- Surge currents up to 30 A
- Operating temperature up to 85 °C
- Good solderability for reflow process
- Suitable for ESD protection
- Bidirectional clamping

Taping

- Supply on 8/12-mm tape, for tape dimensions see pages 154/155, for reel dimensions and packing units see page 157, chapter "SMD Varistors: Taping"

Type designation


Detailed description of coding system on page 39, chapter "General Technical Information"

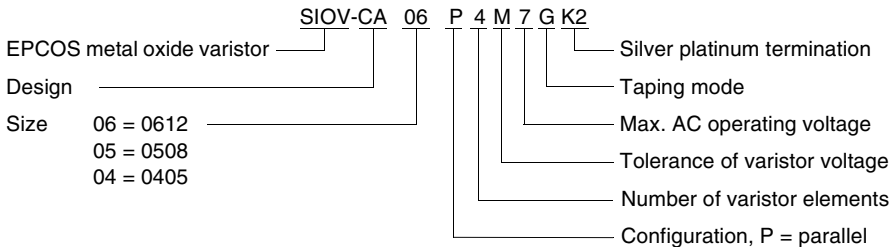

General technical data

Climatic category	30/85/56	in accordance with IEC 60068-1
LCT	– 30 °C	
UCT	+ 85 °C	
Damp heat, steady state (93 % r.h., 40 °C)	56 days	in accordance with IEC 60068-2-3
Operating temperature	– 30 ... + 85 °C	in accordance with CECC 42 000
Storage temperature ¹⁾	– 40 ... + 125 °C	
Response time	< 0,5 ns	
Solderability	235 °C, 2 s	in accordance with IEC 60068-2-58

1) For mounted parts (storage conditions for unused parts on reel see page 38, chapter "General Technical Information")



SMD Varistors

Arrays – Silver Platinum Termination ($T_A = 85\text{ °C}$)

Maximum ratings

Type	Ordering code	V_{RMS} V	V_{DC} V	i_{max} 8/20 μ s A	W_{max} (2 ms) J	P_{max} W
SIOV-						
CA06P4M7GK2	B72728A0070M062	7	8,5	30	0,075	0,003
CA06P4S17ALCGK2	B72728A2170S162	17	22	30	0,075	0,003
CA05P4S17ALCGK2	B72718A2170S162	17	22	10	0,01	0,003
CA04P2S17TLCG ²⁾	B72766A2170S160	17	22	10	0,01	0,003

Characteristics


Type	V_V (1 mA) V	ΔV_V (1 mA) %	Max. clamping voltage v i V A		C_{typ} (1 kHz) pF	L_{typ} nH	Derating curve Page	V/I char- acteristic Page
SIOV-								
CA06P4M7GK2	12,5	± 20	30	1,0	200	1,0	238	265
CA06P4S17ALCGK2	32,5	± 23	50	1,0	< 75 ¹⁾	1,0	238	265
CA05P4S17ALCGK2	32,5	± 23	50	1,0	< 75 ¹⁾	1,0	237	265
CA04P2S17TLCG ²⁾	32,5	± 23	50	1,0	< 75 ¹⁾	1,0	237	265

1) C_{typ} (1 MHz)


2) Nickel barrier termination

SMD Varistors

MLV Arrays CA06P4 and CA05P4



Dimensions




CA06P4

$l = 3,2 \pm 0,2$
 $b = 1,6 \pm 0,15$
 $s = 0,9 \text{ max.}$
 $d = 0,4 \pm 0,15$
 $e = 0,8 \pm 0,15$
 Coplanarity < 0,1


CA05P4

$l = 2,0 \pm 0,2$
 $b = 1,25 \pm 0,15$
 $s = 0,9 \text{ max.}$
 $d = 0,3 \pm 0,10$
 $e = 0,5 \pm 0,10$
 Coplanarity < 0,1



VAR0399-P

Recommended solder pad layout



CA06P4

$A = 0,5 \text{ mm}$
 $B = 0,7 \text{ mm}$
 $C = 1,2 \text{ mm}$
 $E = 0,76 \text{ mm}$


CA05P4

$A = 0,35 \text{ mm}$
 $B = 0,9 \text{ mm}$
 $C = 0,4 \text{ mm}$
 $E = 0,5 \text{ mm}$


VAR0407-U

SMD Varistors

MLV Array CA04P2



Dimensions



CA04P2

$$l = 1,37 \pm 0,15$$


$$b = 1,0 \pm 0,15$$

$$s = 0,7 \text{ max.}$$


$$d = 0,36 \pm 0,1$$

$$e_{\text{Ref}} = 0,64$$

Coplanarity < 0,1



Recommended solder pad layout



CA04P2

$$A = 0,4 \text{ mm}$$

$$B = 0,55 \text{ mm}$$

$$C = 0,28 \text{ mm}$$

$$D = 0,64 \text{ mm}$$

VAR0514-J

Herausgegeben von EPCOS AG

Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.