

TOTAL POWER INT'L

TPS150 SWITCHING MODE 130W U CHANNEL POWER SUPPLIES



ELECTRICAL SPECIFICATIONS


INPUT

- *Input range-----90~264 VAC, auto ranging
- *Frequency-----47~63Hz
- *Inrush current-----40A typical, Cold start @25°C, 115VAC
- *Efficiency-----65%~85% typical at full load
- *EMI filter-----FCC Class B conducted, CISPR 22 Class B conducted, EN55022 class B Conducted
- *Line regulation----- +/- 0.5% typical

OUTPUT

- *Maximum power----130W convection (Refer next page)
- *Hold-up time -----10ms typical at full load and 115 VAC nominal line
- *Overload protection-Short circuit protection
- *Overvoltage protection -----Main output 20% to 40% above nominal output
- *Ripple/Noise ----- +/- 1% Max. @full load (Optional +/- 0.5% per inquiry)

Power Derating Curve

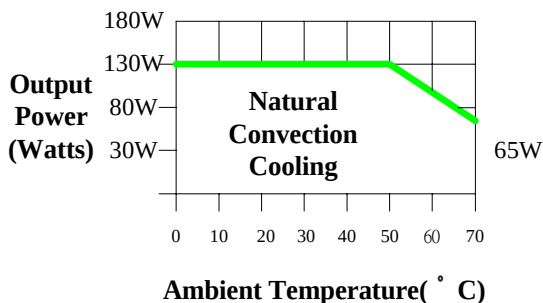

KEY FEATURES

- *Universal input
- *Built-in EMI filter
- *Optional remote sense on main output
- *Optional constant current charger
- *Optional Power Good signal/Optional cover
- *Optional±12VDC/±24VDC/±48VDC input

APPLICATIONS

- *Telecommunications/Medical machines
- *Computer peripherals/Business machines
- *Test & industrial equipments

EMI & EMC

- *FCC part 15, Class B
- *CISPR 22 / EN55022, Class B
- *VCCI ,Class 2
- *CE,EN 61000-3-2 (Class A) (Optional) and -3; EN 61000-4-2,-3,-4,-5,-6 and -11

SAFETY APPROVAL

- *UL1950 / c UL
- *Optional CSA 22.2, LEVEL 3 (COMPLY WITH)
- *TUV EN60950
- *Optional UL 2601 (EMI Class A)(COMPLY WITH)

ENVIRONMENTAL

- *Operating temperature :
0 to 50°C ambient; derate each output at 2.5% per degree from 50°C to 70°C
- *Humidity:
Operating; non-condensing, 5% to 95%
- *Vibration :
10~55 Hz at 1G 3 minutes period, 30 minutes along X, Y and Z axis
- *Storage temperature:
-40 to 85°C
- *Temperature coefficient:
+/- 0.05% per degree C
- *MTBF demonstrated:
>100,000 hours at full load and 25°C ambient conditions

PPS150 SWITCHING MODE 130W U CHANNEL POWER SUPPLIES

MODEL	OUTPUTVOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUTCURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
SINGLE OUTPUT MODEL SELECTION CHART								
TPS150-10	+5V	±10% Typical	26A	42A	0A	±3%	±1%	210W Typical
TPS150-11	+12V	±10% Typical	11A	17.6A	0A	±3%	±1%	210W Typical
TPS150-12	+15V	±10% Typical	8.7A	13.9A	0A	±3%	±1%	210W Typical
TPS150-13	+24V	±10% Typical	5.5A	8.8A	0A	±3%	±1%	210W Typical
TPS150-14	+48V	±10% Typical	2.7A	4.3A	0A	±3%	±1%	210W Typical
TPS150-15	+36V	±10% Typical	3.6A	5.8A	0A	±3%	±1%	210W Typical
TPS150-16	+56V	±10% Typical	2.35A	3.8A	0A	±3%	±1%	210W Typical
TPS150-17	+18V	±10% Typical	7.25A	11.6A	0A	±3%	±1%	210W Typical
TPS150-18	+3.3V	±10% Typical	26A	41.6A	0A	±5%	±1.5%	210W Typical
DUAL OUTPUT MODEL SELECTION CHART								
TPS150-20	+5 V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	6.3A	10.1A	0.63A	±5%	±1%	
TPS150-21	+5 V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+24V	Fixed	3.3A	5.3A	0.33A	±5%	±1%	
TPS150-22	+5 V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	- 5 V	Fixed	15A	24A	1.5A	±5%	±1%	
TPS150-23	+12V	±10% Typical	6.3A	10.1A	0.63A	±5%	±1%	210W Typical
	- 12 V	Fixed	6.3A	10.1A	0.63A	±5%	±1%	
TPS150-24	+15 V	±10% Typical	5A	8A	0.5A	±5%	±1%	210W Typical
	- 15 V	Fixed	5A	8A	0.5A	±5%	±1%	
TPS150-25	+3.3V	±10% Typical	16.5A	26.4A	1.65A	±5%	±1.5%	210W Typical
	+12 V	Fixed	6.3A	10.1A	0.63A	±5%	±1%	
TPS150-26	+ 12V	±10% Typical	7.1A	11.4A	0.71A	±5%	±1%	210W Typical
	+ 24V	Fixed	2.7A	4.3A	0.27A	±5%	±1%	
TPS150-27	+ 10.3V	±10% Typical	6.3A	10.1A	0.63A	±5%	±1%	210W Typical
	+ 24V	Fixed	3.6A	5.8A	0.36A	±5%	±1%	
TPS150-28	+ 5V	±10% Typical	20A	32A	2A	±5%	±1%	210W Typical
	+ 3.3V	Fixed	14.5A	23.2A	1.45A	±5%	±1.5%	
TRIPLE OUTPUT MODEL SELECTION CHART								
TPS150-30	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	6A	9.6A	0.6A	±5%	±1%	
	- 5 V	Fixed	0.9A	1.4A	0.09A	±10%	±1%	
TPS150-31	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	6A	9.6A	0.6A	±5%	±1%	
	-12V	Fixed	0.9A	1.4A	0.09A	±10%	±1%	
TPS150-32	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+15V	Fixed	4A	6.4A	0.4A	±5%	±1%	
	-15V	Fixed	1A	1.6A	0.1A	±10%	±1%	
TPS150-33	+ 5V	±10% Typical	21A	33.6A	2.1A	±5%	±1%	210W Typical
	+15V	Fixed	3A	4.8A	0.3A	±5%	±1%	
	- 5 V	Fixed	0.9A	1.4A	0.09A	±10%	±1%	
TPS150-34	+ 5V	±10% Typical	19.2A	30.7A	1.92A	±5%	±1%	210W Typical
	+15V	Fixed	3A	4.8A	0.3A	±5%	±1%	
	-12V	Fixed	0.9A	1.4A	0.09A	±10%	±1%	
TPS150-35	+ 5 V	±10% Typical	13.8A	22.1A	1.38A	±5%	±1%	210W Typical
	-12V	Fixed	0.9A	1.4A	0.09A	±5%	±1%	
	+24V	Fixed	3A	4.8A	0.3A	±10%	±1%	
TPS150-36	+ 5V	±10% Typical	13.8A	22.1A	1.38A	±5%	±1%	210W Typical
	+12V	Fixed	6A	9.6A	0.6A	±5%	±1%	
	- 12V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
TPS150-37	+ 5V	±10% Typical	13.8A	22A	1.38A	±5%	±1%	210W Typical
	+12V	Fixed	5.4A	8.6A	0.54A	±5%	±1%	
	+24V	Fixed	0.8A	1.3A	0.08A	±10%	±1%	
TPS150-38	+ 5V	±10% Typical	6.7A	10.7A	0.67A	±5%	±1%	210W Typical
	+24V	Fixed	1.8A	2.9A	0.18A	±5%	±1%	
	+12V	Fixed	6A	9.6A	0.6A	±10%	±1%	

PPS150 SWITCHING MODE 130W U CHANNEL POWER SUPPLIES


MODEL	OUTPUTVOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUTCURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
TRIPLE OUTPUT MODEL SELECTION CHART								
TPS150-39	+18V	±10% Typical	4A	6.4A	0.4A	±5%	±1%	210W Typical
	- 18V	Fixed	4A	6.4A	0.4A	±5%	±1%	
	+ 5V	Fixed	2A	3.2A	0.2A	±10%	±1%	
QUAD OUTPUT MODEL SELECTION CHART								
TPS150-40	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	5.3A	8.5A	0.53A	±5%	±1%	
	- 12V	Fixed	0.8A	1.3A	0.08A	±10%	±1%	
	- 5 V	Fixed	0.8A	1.3A	0.08A	±10%	±1%	
TPS150-41	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	4.2A	6.7A	0.42A	±5%	±1%	
	- 12V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
	- 5 V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
TPS150-42	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	2.7A	4.3A	0.27A	±5%	±1%	
	- 15V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
	+15V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
TPS150-43	+ 5V	±10% Typical	9A	14.4A	0.9A	±5%	±1%	210W Typical
	+12V	Fixed	3.5A	5.6A	0.35A	±5%	±1%	
	- 12V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
	- 15V	Fixed	3A	4.8A	0.3A	±10%	±1%	
TPS150-44	+ 5V	±10% Typical	9A	14.4A	0.9A	±5%	±1%	210W Typical
	+12V	Fixed	1.5A	2.4A	0.15A	±5%	±1%	
	- 12V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
	+48V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
TPS150-45Y	+ 5V	±10% Typical	15A	24A	1.5A	±5%	±1%	210W Typical
	+12V	Fixed	2A	8.5A	0.2A	±5%	±1%	
	- 12V	Fixed	1A	1.6A	0.1A	±10%	±1%	
	+24V	Fixed	1.5A	2.4A	0.15A	±10%	±1%	
TPS150-46	+ 5V	±10% Typical	4A	6.4A	0.4A	±5%	±1%	210W Typical
	- 15V	Fixed	1.25A	2A	0.13A	±5%	±1%	
	+15V	Fixed	0.8A	1.3A	0.08A	±10%	±1%	
	+24V	Fixed	4A	6.4A	0.4A	±10%	±1%	
TPS150-47	+ 5V	±10% Typical	13A	20.8A	1.3A	±5%	±1%	210W Typical
	+15V	Fixed	1.1A	1.76A	0.11A	±5%	±1%	
	- 15V	Fixed	1.1A	1.76A	0.11A	±10%	±1%	
	+48V	Fixed	1.1A	1.76A	0.11A	±10%	±1%	
TPS150-48	+ 5V	±10% Typical	12.5A	20A	1.25A	±5%	±1%	210W Typical
	+3.3V	Fixed	9A	14.4A	0.9A	±5%	±1.5%	
	+12V	Fixed	2.5A	4A	0.25A	±10%	±1%	
	-12V	Fixed	2.5A	4A	0.25A	±10%	±1%	
TPS150-49	+ 5V	±10% Typical	12.5A	20A	1.25A	±5%	±1%	210W Typical
	+3.3V	Fixed	9A	14.4A	0.9A	±5%	±1.5%	
	+12V	Fixed	2.5A	4A	0.25A	±10%	±1%	
	+24V	Fixed	1A	1.6A	0.1A	±10%	±1%	

- NOTES:** 1) Peak loads for lasting <30 seconds with a maximum 10% duty cycle are acceptable. Please contact us if need special peak load.
2) Maximum peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth, 0.1 μ F and 47 μ F Cap. on outputs.
3) Loading test conditions are set for all outputs at minimum, middle and maximum of loads. Special cross loading requirement is welcomed.
4) Detailed engineering specification of each model is available for inquiry.
5) Special output voltage/current inquiry is welcomed.
6) Specifications subject to change without notice.
7) 25% derated if 24 VDC input version; 50% derated, if 12 VDC input version; 25% derated if additional cover.

TERMINAL BLOCKS
CON1: PITCH=9.5 mm
CON2: PITCH=8.25 mm

CON1=CONNECTOR,MOLEX#09-65-2058(OR EQUIVALENT)
(MATING CONECT.=MOLEX#09-50-3051)
CON2=CONNECTOR,MOLEX#09-65-2158(OR EQUIVALENT)
(MATING CONECT.=MOLEX#09-50-3151)
ALL MATING TERMINAL=MOLEX#08-50-0106(OR EQUIVALENT)


CON3=CONNECTOR,MOLEX#22-27-2041(OR EQUIVALENT)
(MATING CONECT.=MOLEX#22-01-3047)
MATING TERMINAL=MOLEX#08-50-0113(OR EQUIVALENT)

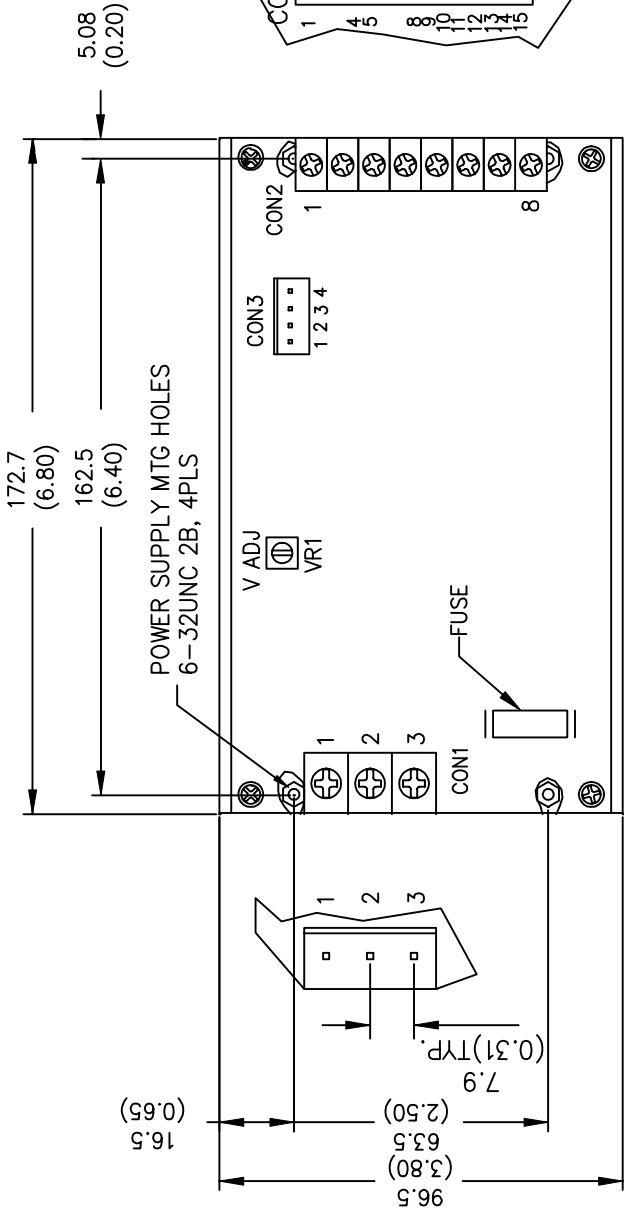

16.5
(0.65)

38.1
(1.50)

MOUNTING SURFACE
MAXIMUM INSERTION
DEPTH 3.18(0.125")



96.5
(3.80)

63.5
(2.50)

7.9
(0.31) TYP.

TOLERANCE : $\frac{\text{mm} \pm 0.5}{(\text{inch}) \pm 0.02}$

UNIT: $\frac{\text{mm}}{(\text{inch})}$

CON1 (CONNECTORS) CONFIGURATION

1	2	3
FG	NEUT(-)	LINE(+)

CON1 (TERMINAL BLOCK) CONFIGURATION

1	2	3
FG	NEUT(-)	LINE(+)

CON2 (TERMINAL BLOCK) CONFIGURATION
FOR V4 ISOLATED

Multiple Output	1	2	3	4	5	6	7	8
	V1	RET	V2	V3	V4	RET	V4	RET

CON2 (TERMINAL BLOCK) CONFIGURATION
FOR V4 POSITIVE

Multiple Output	1	2	3	4	5	6	7	8
	V1	RET	V2	V3	RET	V4	RET	V4(+)

CON2 (TERMINAL BLOCK) CONFIGURATION
FOR V4 NEGATIVE

Multiple Output	1	2	3	4	5	6	7	8
	V1	RET	V2	V3	V4(-)	RET		

CON2 (TERMINAL BLOCK) CONFIGURATION

Single Output	1-4	5-8
	V1(+)	RET(-)

CON2 (CONNECTORS) CONFIGURATION
FOR V4 ISOLATED

Multiple Output	1-4	5-10	11	12	13	14-15
	V1	RET	V2	V3	V4	RET

CON2 (CONNECTORS) CONFIGURATION
FOR V4 POSITIVE

Multiple Output	1-4	5-10	11	12	13	14-15
	V1	RET	V2	V3	RET	V4(+)

CON2 (CONNECTORS) CONFIGURATION
FOR V4 NEGATIVE

Multiple Output	1-4	5-10	11	12	13	14-15
	V1	RET	V2	V3	V4(-)	RET

CON2 (CONNECTORS) CONFIGURATION

Single Output	1-8	9-15
	V1(+)	RET(-)

CON3 CONFIGURATION

1	2	3	4
S-	S+	RET	PG