





16 Amp ULTRAFAST SWITCHMODE POWER PLASTIC RECTIFIERS


UF16C05 . . . 60 Series

Description



Mechanical Dimensions

JEDEC
TO-220AB

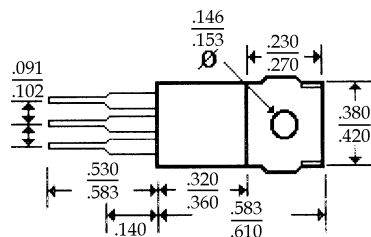

(Dimensions in inches)

Features

- LOW FORWARD VOLTAGE
- HIGH SURGE CAPABILITY


- ULTRAFAST RECOVERY TIME
- MEETS UL SPECIFICATION 94V-0

UF16C05 . . . 60 Series									Units
Maximum Ratings	05	10	15	20	30	40	50	60	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	150	200	300	400	500	600	Volts
Working Peak Reverse Voltage... V_{RWM}	50	100	150	200	300	400	500	600	Volts
DC Blocking Voltage... V_{DC}	50	100	150	200	300	400	500	600	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	105	140	210	280	350	420	Volts
Average Forward Rectified Current... $I_{F(av)}$ $T_c = 150^{\circ}C$ @ Rated V_{DC}	 8.0								Amps
	 16								Amps
Repetitive Peak Forward Surge Current... I_{FM} @ Rated V_{DC} , Square Wave, 20 kHz, $T_c = 150^{\circ}C$	 16								Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} @ Rated Load Cond., 1/2 Wave, Single Phase, 60Hz	 125								Amps
Operating & Storage Temperature Range... T_J , T_{STRG}	 -65 to 150								$^{\circ}C$
Electrical Characteristics									
Maximum Forward Voltage... V_F @ $I_F = 8$ Amps, PW = 300 μs	$T_c = 150^{\circ}C$	<	0.895	> <	1.0 ...	> <	1.2	>	Volts
	$T_c = 25^{\circ}C$	<	0.975	> <	1.3 ...	> <	1.5	>	Volts
Maximum DC Reverse Current... I_R @ Rated DC Blocking Voltage	$T_c = 150^{\circ}C$	 500							μ Amps
	$T_c = 25^{\circ}C$	 10							μ Amps
Maximum Reverse Recovery Time... t_{RR} $I_F = 1.0$ Amp, di/dt = 50 Amps/ μs	<		35	> <	50	>			ns


16 Amp ULTRAFAST SWITCHMODE POWER PLASTIC RECTIFIERS

UF16C05 . . . 60 Series


Forward Current Derating Curve

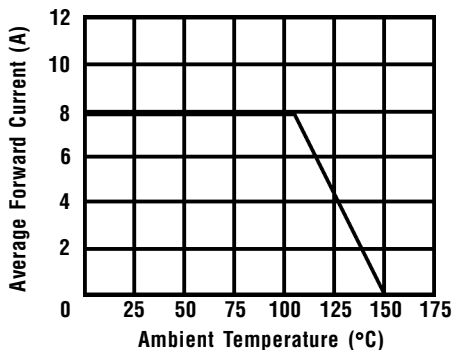


**Non-Repetitive
Peak Forward Surge Current**

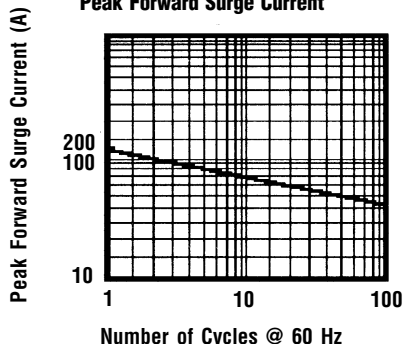



Typical Reverse Characteristics

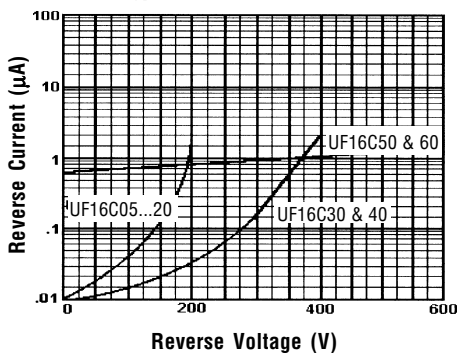

Typical Junction Capacitance

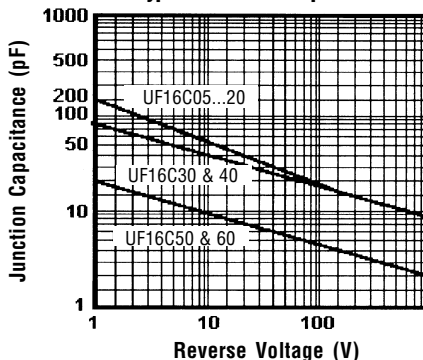


**Typical Instantaneous
Forward Characteristics**

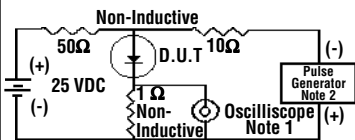

Notes:

1. Rise Time = 7 ns Max.
Impedance = 1 megohm, 22 pF
2. Rise Time = 10 ns Max.
Source Impedance = 50 Ohms

**Reverse Recovery
Characteristics**



Ratings at
25 Deg. C ambient
temperature
unless otherwise
specified.

Single Phase Half
Wave, 60 Hz
Resistive or
Inductive Load.

For Capacitive
Load, Derate
Current by 20%.