


Commercial miniature 6 mm cermet trimmer potentiometer

- Variety of terminal pitches
- Front cross-slot adjustment
- Available in Bulk and Ammo-Pak

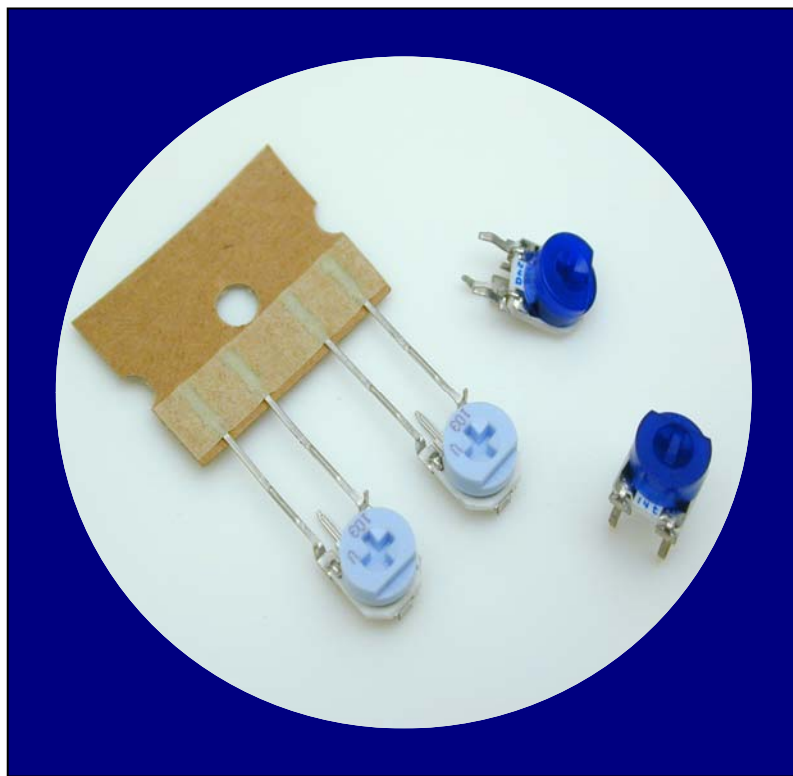

Electrical and Mechanical Specifications

Taper

Linear

Resistance Range

100 ohms to 1 megohm
(See Resistance Code Table)

Resistance Tolerance

$\pm 25\%$

Residual Resistance

Less than 2% of the total resistance value,
100 k Ω < 5% maximum

Power Rating

Cermet - 0.3 watt at 70°C, 0 watts at 100°C

Maximum Working Voltage

100 V

Temperature Range

-25° C ~ +100 ° C

Temperature Coefficient

± 250 ppm/°C

Noise (Contact Resistance Variation)

Less than 4% of total resistance

Rotation Angle

240° $\pm$ 10°


Operation Torque

Bulk – 2.94 ~ 29.4 mN•m
Taped – 0.98 ~ 29.4 mN•m

Stop Strength


49.00 mN•m, maximum

307U Style - Horizontal mounting - Knob parallel to printed circuit board

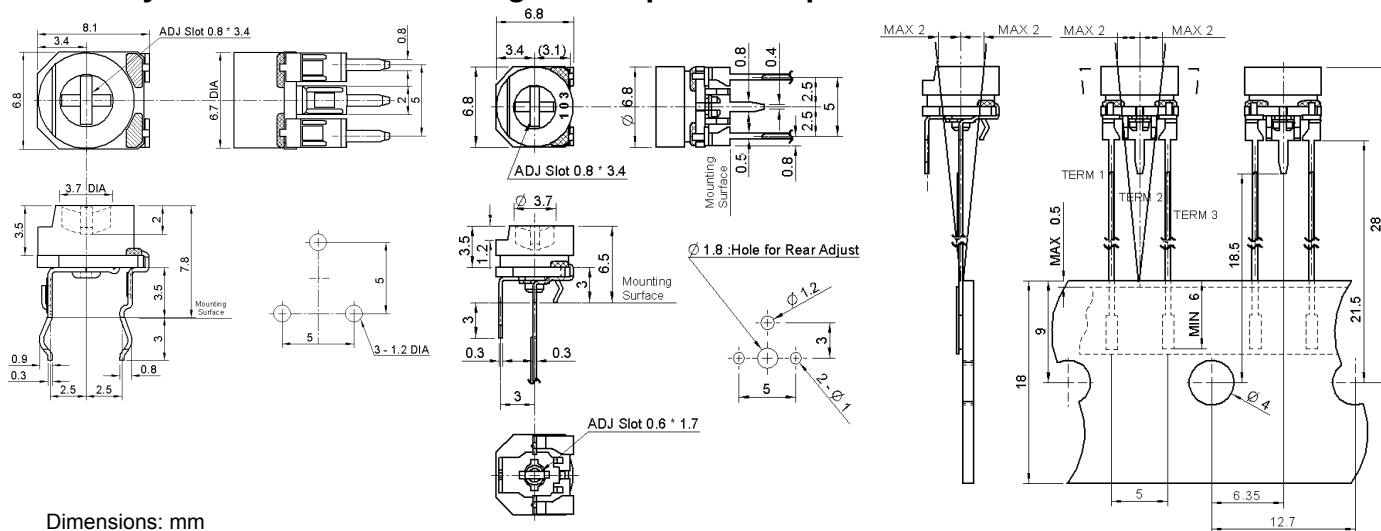

Dimensions: mm

307X Style - Vertical Mounting - Knob perpendicular to printed circuit board

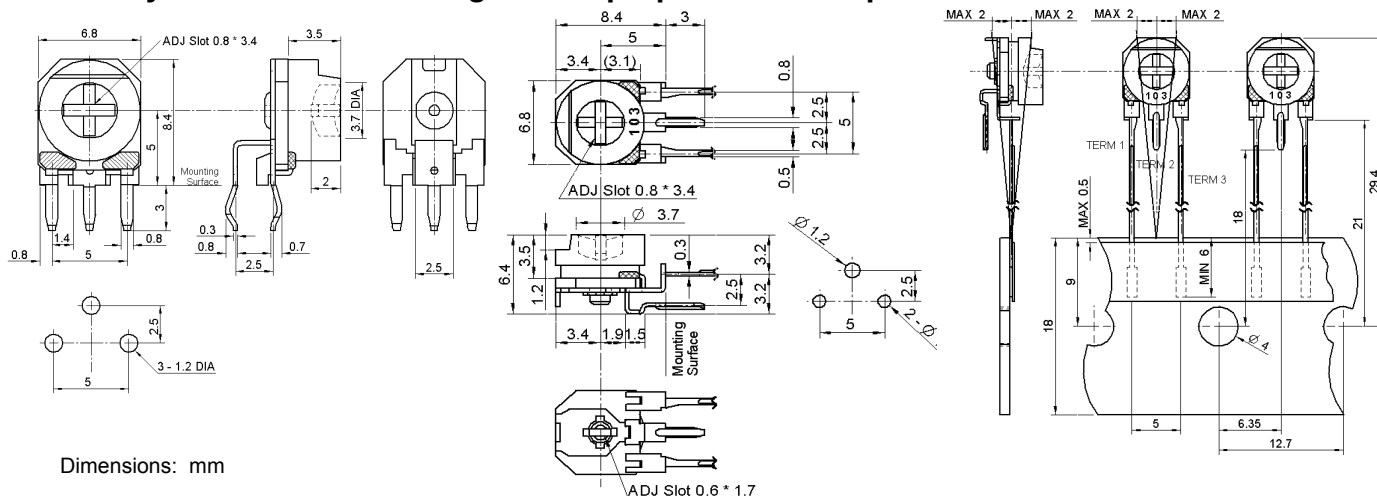

Dimensions: mm

Ordering Information

307 SERIES 307 - 6 mm ROUND CERMET TRIMMER	U MOUNTING STYLE U- HORIZONTAL MOUNT X- VERTICAL MOUNT - KNOB	C KNOB TYPE C - CROSS-SLOT SMOOTH EDGE	RESISTANCE CODE						E RESISTANCE TOLERANCE E ± 25 %	A PACKAGING BLANK – BULK (500 pcs) A – Ammo-Pak (1,000pc)
			Code	Resistance	Code	Resistance	Code	Resistance		
			101	100 OHMS	502	5K OHMS	104	100K OHMS		
			201	200 OHMS	103	10K OHMS	204	200K OHMS		
			501	500 OHMS	203	20K OHMS	504	500K OHMS		
			102	1K OHMS	503	50K OHMS	105	1 MEGOHM		
			202	2K OHMS						

Example of part number: 307UC203ERA