



XIN SEMICONDUCTOR
ISO9002

HQ MARKING

1SS101 THUR 1SS301

SUPER HIGH SPEED SWITCHING DIODE
SPECIAL DESIGN FOR PROTECTING SOLAR BATTERY

FEATURES

- For general purpose applications
- These diodes features very low turn-on voltage and fastswitching. These devices are protected by a Pnjunction guard ring against excessive voltage, such as electrostatic discharges.


APPLICATIONS

High speed switch circuit
IC polarity protection
Solar battery polarity protection
Small signal rectifier

MECHANICAL DATA

- Case: JEDEC R-1 molded plastic body
- *Polarity:* color band denotes cathode end
- *Mounting Position:* Any
- *Weight:* 0.0063ounce, 0.18 gram

R-1

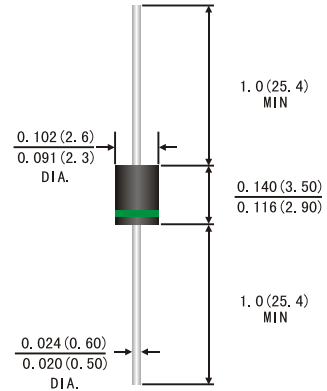

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

		<i>Symbols</i>	<i>1SS101</i>	<i>1SS201</i>	<i>1SS301</i>	<i>Units</i>
Maximum repetitive peak reverse voltage		VRRM	20	30	40	Volts
Maximum RMS voltage		VRMS	14	21	28	Volts
Maximum DC blocking voltage		VDC	20	30	40	Volts
Maximum non-repetitive peak reverse voltage		VRSM	24	36	48	Volts
Maximum average forward rectified current 0.375"(9.5mm)lead length at TL=90° C		I(AV)	0.5			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) at TL=70°C		IFSM	5.0			Amps
Maximum instantaneous forward voltage at 1mA 200mA		VF	0.20			Volts
			0.35			
Maximum instantaneous reverse current at rated DC blocking voltage)	TA=25°C	IR	0.01			m A
	TA=100°C		1.0			
Typical junction capacitance		CJ	10.0			pF
Typical thermal resistance		RθJA RθJL	50.0 15.0			°C/W
Operating junction and storage temperature range		TJ TSTG	-65 to +125			°C

RATINGS AND CHARACTERISTIC CURVES 1SS101 THRU 1SS301

FIG.1-FORWARD CURRENT DERATING CURVE

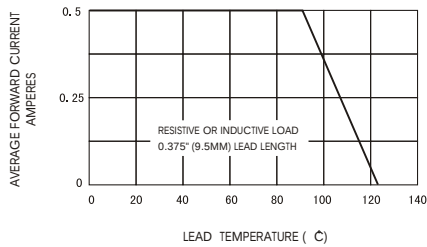


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

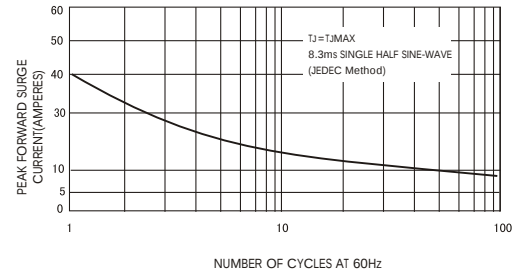


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

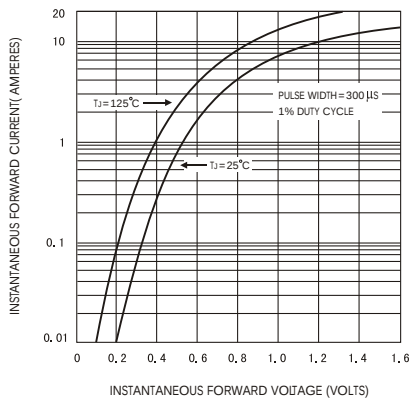


FIG.4-TYPICAL REVERSE CHARACTERISTICS

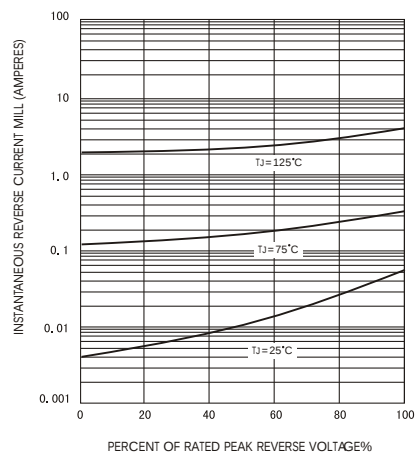


FIG.5-TYPICAL JUNCTION CAPACITANCE

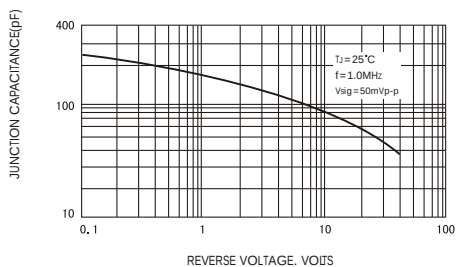


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

