

Absolute Maximum Ratings $T_A=25^\circ\text{C}$


Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the

device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to Absolute Maximum Ratings for extended periods of time can adversely affect reliability.


Parameter	Symbol	Test Conditions	LH1521	LH1523	Units
Ambient Operating Temperature Range	T_A	—	-40 to +85	-40 to +85	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	—	-40 to +150	-40 to +150	$^\circ\text{C}$
Pin Soldering Temperature	T_S	$t=10\text{ s max}$	260	260	$^\circ\text{C}$
Input/Output Isolation Test Voltage	V_{ISO}	$V_{\text{rms}} t=1\text{ s}$ $I_{\text{ISO}}=10\text{ }\mu\text{A max}$	5300	5300	Vrms
Pole-to-Pole Isolation Voltage* (S1 to S2)	—	Dry air, dust free, at sea level	1600	1600	V
LED Continuous Forward Current	I_F	—	50	50	mA
LED Reverse Voltage	V_R	$I_R \leq 10\text{ }\mu\text{A}$	8	8	V
dc or Peak ac Load Voltage	V_L	$I_L \leq 50\text{ }\mu\text{A}$	350	200	V
Continuous dc Load Current One Pole Operating Two Poles Operating	I_L	—	150 110	200 140	mA mA
Peak Load Current	I_P	$t=100\text{ ms}$ (single shot)	400	600	mA
Output Power Dissipation (continuous)	P_{DISS}	—	600	600	mW

* Breakdown occurs between the output pins external to the package.

Recommended Operating Conditions

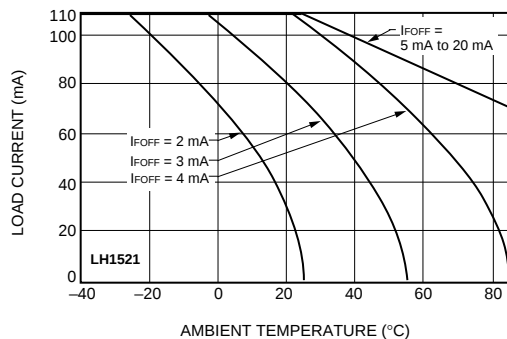

Both relays on with equal load currents. For a single relay operation, refer to LH1501 Recommended Operating Conditions graph.

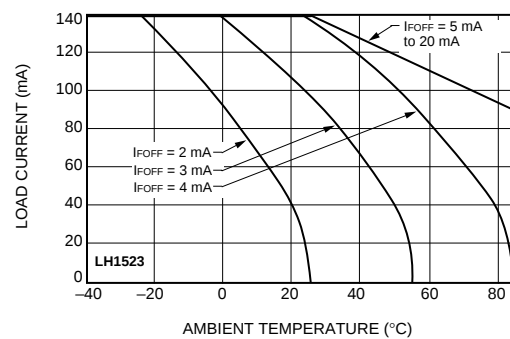

Both relays on with equal load currents. For a single relay operation, refer to LH1511 Recommended Operating Conditions graph.

Electrical Characteristics $T_A=25^{\circ}\text{C}$


Minimum and maximum values are testing requirements. Typical values are characteristics of the device

and are the result of engineering evaluations. Typical values are for information purposes only and are not part of the testing requirements.


	Parameter	Symbol	Test Conditions	Values	LH1521	LH1523	Units
I N P U T	LED Forward Current for Switch Turn-off	I_{Foff}	—	Min	—	—	mA
				Typ	1.0	1.0	mA
				Max	2.0	2.0	mA
			V_L	$\pm$	300	150	V
	LED Forward Current for Switch Turn-on	I_{Fon}	$t=10\text{ ms}$	Min	0.2	0.2	mA
				Typ	0.9	0.9	mA
				Max	—	—	mA
			I_L	$\pm$	150	200	mA
	LED Forward Voltage	V_F	$I_F=10\text{ mA}$	Min	1.15	1.15	V
				Typ	1.22	1.22	V
				Max	1.45	1.45	V
O U T P U T	ON-resistance	R_{ON}	$I_F=0\text{ mA}$ $I_L=50\text{ mA}$	Min	12	6	Ω
				Typ	20	10	Ω
				Max	25	15	Ω
	OFF-resistance	R_{OFF}	$I_F=5\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	0.1	0.1	$\text{G}\Omega$
				Typ	1.4	1.4	$\text{G}\Omega$
				Max	—	—	$\text{G}\Omega$
	Off-state Leakage Current	—	$I_F=5\text{ mA}$ $V_L=\pm 100\text{ V}$	Min	—	—	μA
				Typ	0.07	0.07	μA
				Max	1.0	1.0	μA
		—	$I_F=5\text{ mA}$	Min	—	—	μA
				Typ	0.08	0.07	μA
				Max	1.0	1.0	μA
			V_L	$\pm$	350	200	V
	Output Capacitance	—	$I_F=5\text{ mA}$ $V_L=1\text{ V}$	Min	—	—	pF
				Typ	35	45	pF
				Max	—	—	pF
		—	$I_F=5\text{ mA}$ $V_L=50\text{ V}$	Min	—	—	pF
				Typ	10	15	pF
				Max	—	—	pF
	Pole-to-pole Capacitance	—	$I_F=0\text{ mA}$	Min	—	—	pF
				Typ	0.5	0.5	pF
				Max	—	—	pF
	Switch Offset	—	$I_F=0\text{ mA}$	Min	—	—	μV
				Typ	0.1	0.1	μV
				Max	—	—	μV
T R A N S F E R	Input/Output Capacitance	C_{ISO}	$V_{\text{ISO}}=1\text{ V}$	Min	—	—	pF
				Typ	1.1	1.1	pF
				Max	—	—	pF
	Turn-off Time	t_{off}	$I_F=5\text{ mA}$ $I_L=50\text{ mA}$	Min	—	—	ms
				Typ	2.0	1.0*	ms
				Max	3.0	3.0*	ms
	Turn-on Time	t_{on}	$I_F=5\text{ mA}$ $I_L=50\text{ mA}$	Min	—	—	ms
				Typ	1.0	1.2*	ms
				Max	3.0	3.0*	ms

* $I_F=10\text{ mA}$.


A. LED Voltage vs. Temperature

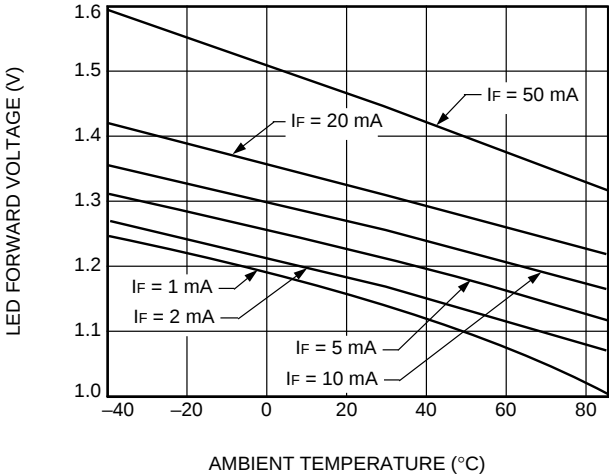


B. LED Dropout Voltage vs. Temperature

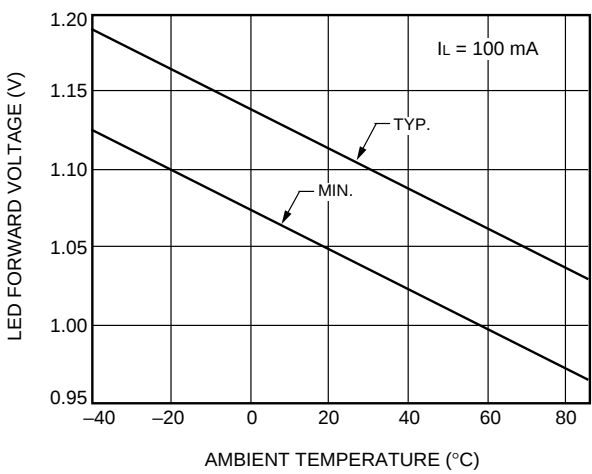


C. LED Current for Switch Turn-Off vs. Temperature

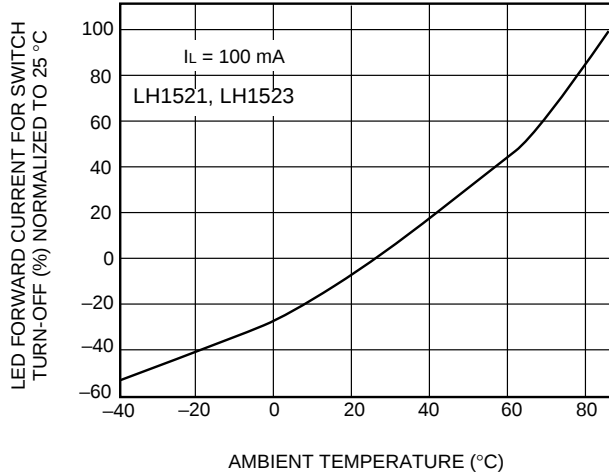


D. ON-Resistance vs. Temperature

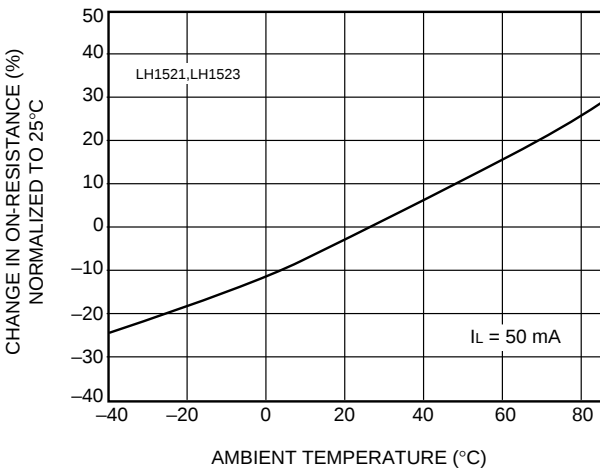


E. Switch Capacitance vs. Applied Voltage

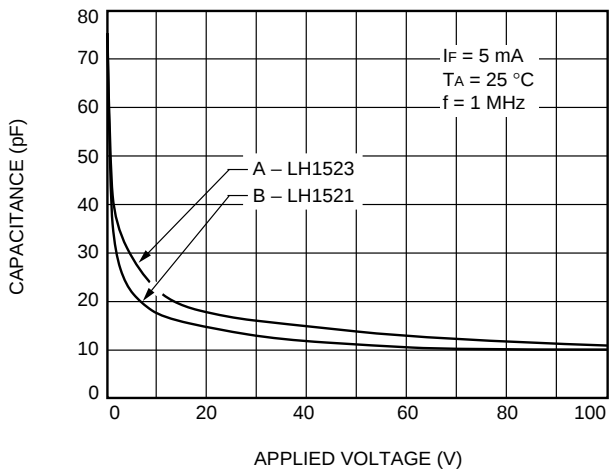


F. Output Isolation

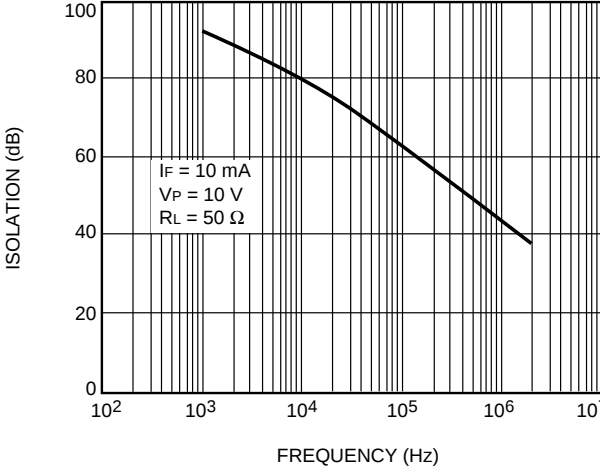


A. Insertion Loss vs. Frequency

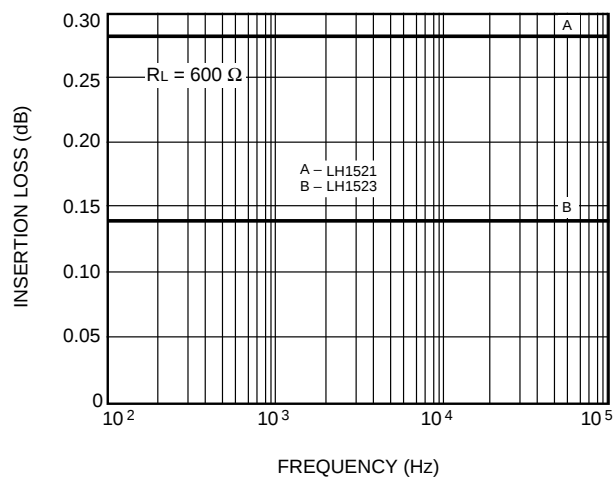


B. Leakage Current vs. Applied Voltage @ 25°C

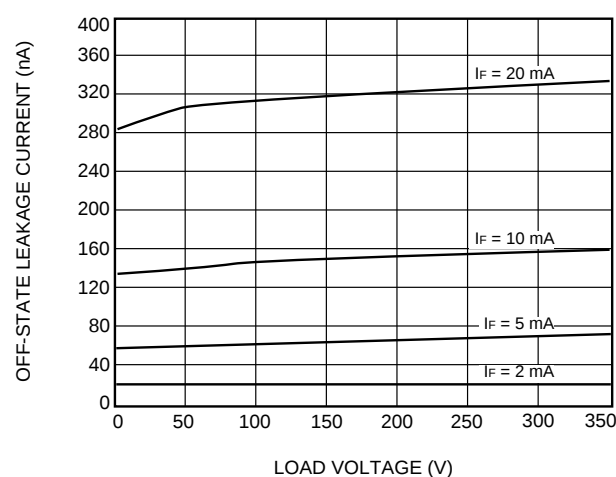


C. Leakage Current vs. Applied Voltage @ 50°C

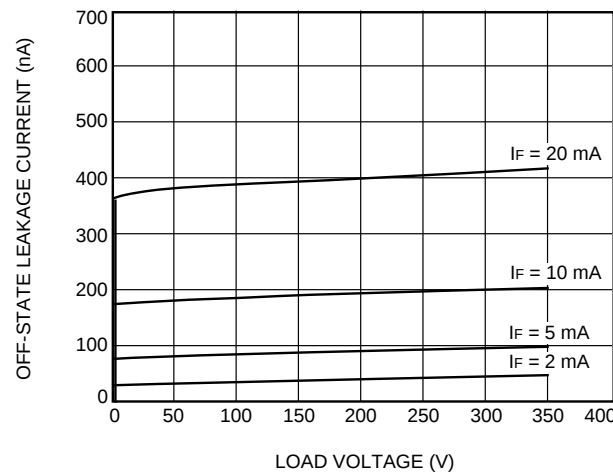


D. Leakage Current vs. Applied Voltage @ 70°C

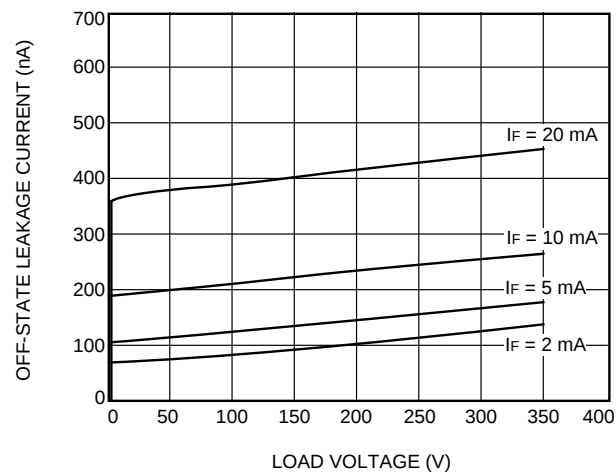


E. Leakage Current vs. Applied Voltage @ 85°C

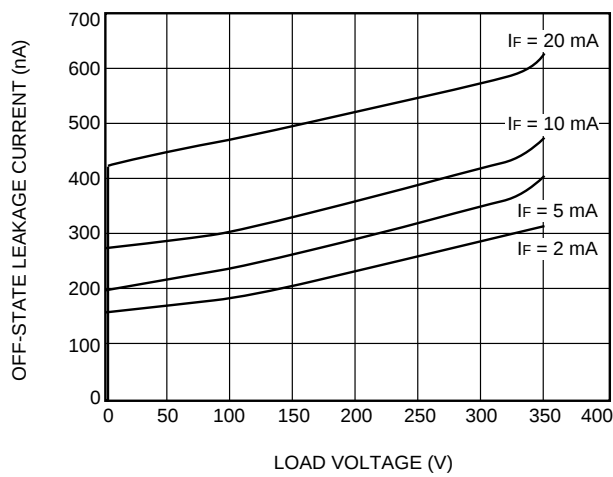


F. Switch Breakdown Voltage vs. Temperature

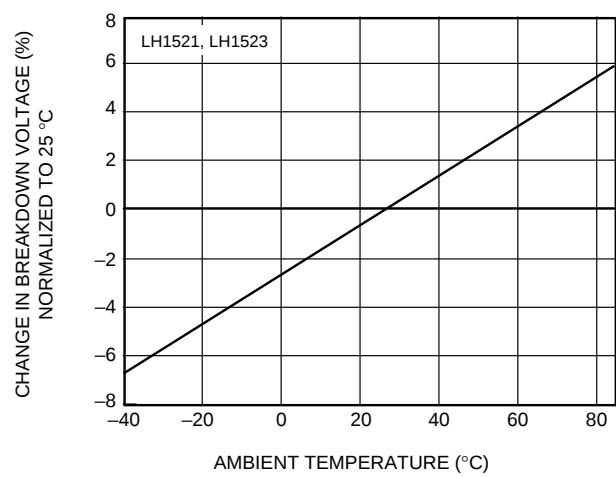


A. Switch Offset Voltage vs. Temperature

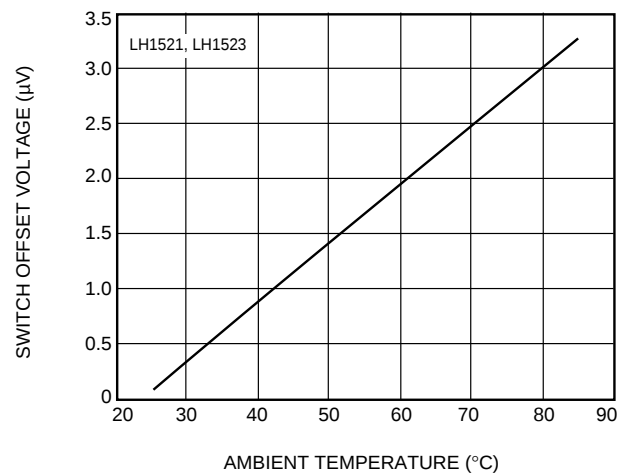


B. Turn-On/Off Time vs. Temperature

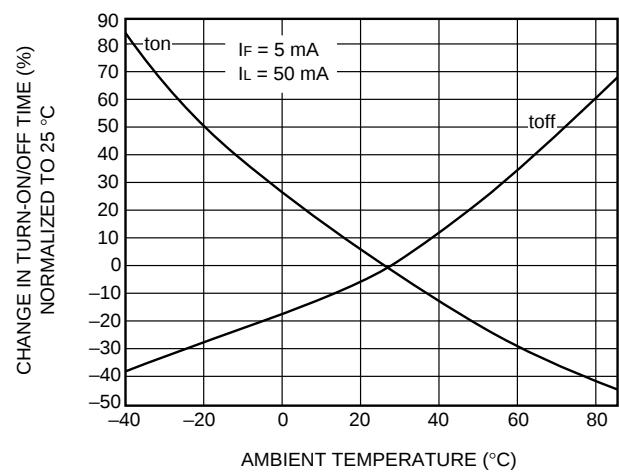

C. Turn-On Time vs. LED Current

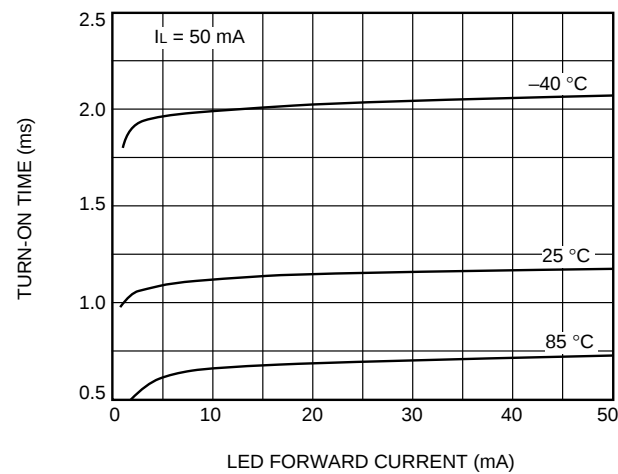

D. Turn-Off Time vs. LED Current

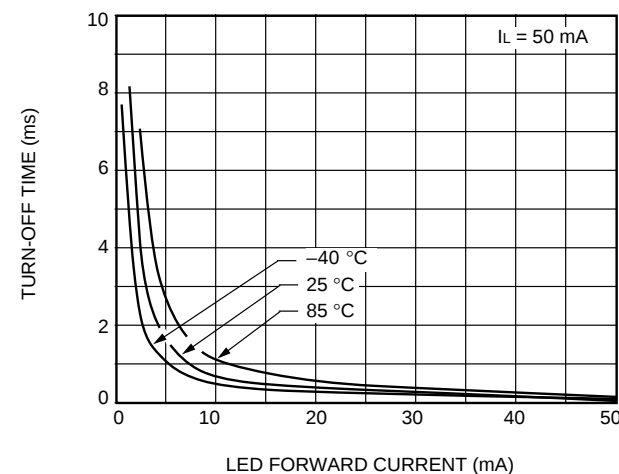



Absolute Maximum Ratings $T_A=25^{\circ}\text{C}$
Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the

device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to Absolute Maximum Ratings for extended periods of time can adversely affect reliability.

Parameter	Symbol	Test Conditions		LH1502	LH1512	Units
Ambient Operating Temperature Range	T_A	—		−40 to +85	−40 to +85	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	—		−40 to +150	−40 to +150	$^{\circ}\text{C}$
Pin Soldering Temperature	T_S	$t=10\text{ s max}$		260	260	$^{\circ}\text{C}$
Input/Output Isolation Test Voltage	V_{ISO}	$t=1\text{ s}$ $I_{\text{ISO}}=10\text{ }\mu\text{A max}$		5300	5300	Vrms
Pole-to-Pole Isolation Voltage* (S1 to S2)	—	Dry air, dust free, at sea level		1600	1600	V
LED Continuous Forward Current	I_F	—		50	50	mA
LED Reverse Voltage	V_R	$I_R \leq 10\text{ }\mu\text{A}$		8	8	V
dc or Peak ac Load Voltage	V_L	$I_L \leq 50\text{ }\mu\text{A}$		350	200	V
Continuous dc Load Current (Form C operation)	I_L	—		150	200	mA
Peak Load Current	I_P	$t=100\text{ ms}$	Form A	†	†	mA
		(single shot)	Form B	400	600	mA
Output Power Dissipation (continuous)	P_{DISS}	—		600	600	mW

* Breakdown occurs between the output pins external to the package.
† Refer to Current-Limit Performance application note for a discussion on relay operation during transient currents.

Recommended Operating Conditions

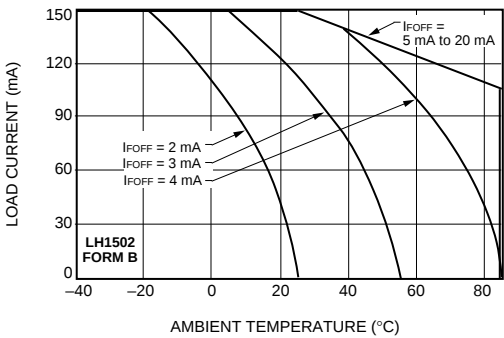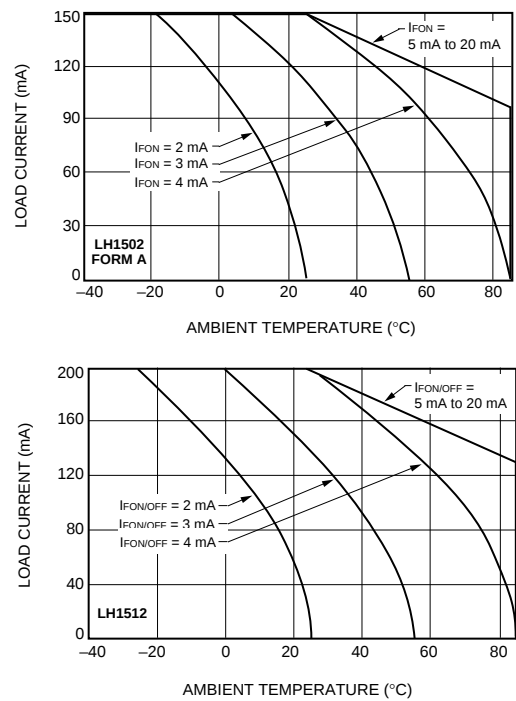

Electrical Characteristics $T_A=25^{\circ}\text{C}$


Minimum and maximum values are testing requirements. Typical values are characteristics of the device

and are the result of engineering evaluations. Typical values are for information purposes only and are not part of the testing requirement.


	Parameter	Symbol	Test Condition	Values	LH1502	LH1512	Units	
I N P U T	LED Forward Current for Switch Turn-on (NO)	I _{Fon}	I _L =100 mA t=10 ms	Min	—	—	mA	
				Typ	0.6	0.6	mA	
				Max	2.0	2.0	mA	
	LED Forward Current for Switch Turn-off (NO)	I _{Foff}	—	Min	0.2	0.2	mA	
				Typ	0.5	0.5	mA	
				Max	—	—	mA	
	LED Forward Current for Switch Turn-on (NC)	I _{Fon}	I _L =100 mA t=10 ms	V _L	±	300	150	V
				Min	0.2	0.2	mA	
				Typ	0.9	0.9	mA	
	LED Forward Current for Switch Turn-off (NC)	I _{Foff}	—	Max	—	—	mA	
				Min	—	—	mA	
				Typ	1.0	1.0	mA	
LED Forward Voltage	V _F	I _F =10 mA	Max	2.0	2.0	mA		
			V _L	±	300	150	V	
			Min	1.15	1.15	V		
O U T P U T	ON-resistance: (NO, NC)	R _{ON}	I _F =5 mA (NO), 0 mA (NC) I _L =50 mA (NC)	Typ	1.26	1.26	V	
				Max	1.45	1.45	V	
				Min	12	6	Ω	
	OFF-resistance (NO) (NC)	R _{OFF}	I _F =0 mA V _L =±100 V I _F =5 mA V _L =±100 V	Typ	20	10	Ω	
				Max	25	15	Ω	
				Min	0.5	0.5	GΩ	
				Typ	5000	5000	GΩ	
				Max	—	—	GΩ	
				Min	0.1	0.1	GΩ	
	Current Limit (NO)	I _{LMT}	I _F =5 mA t=5 ms V _L	Typ	1.4	1.4	GΩ	
				Max	—	—	GΩ	
				Min	230	300	mA	
	Off-state Leakage Current (NO) (NC) (NO, NC)	—	I _F =0 mA V _L =±100 V I _F =5 mA V _L =±100 V I _F =0 mA (NO) I _F =5 mA (NC) V _L	Typ	270	360	mA	
				Max	370	460	mA	
				±	6	5	V	
				Min	—	—	nA	
				Typ	0.02	0.02	nA	
				Max	200	200	nA	
				Min	—	—	μA	
				Typ	0.07	0.07	μA	
				Max	1.0	1.0	μA	
				Min	—	—	μA	
	Output Capacitance (NO) (NC)		I _F =0 mA V _L =1 V I _F =0 mA V _L =50 V I _F =5 mA V _L =1 V I _F =5 mA V _L =50 V	Typ	—	—	μA	
				Typ	—	—	μA	
				Max	1.0	1.0	μA	
				±	350	200	V	
				Min	—	—	pF	
				Typ	55	60	pF	
				Max	—	—	pF	
				Min	—	—	pF	
				Typ	10	15	pF	
				Max	—	—	pF	
	Pole-to-pole Capacitance (S1 to S2)		I _F =0 mA	Min	—	—	pF	
				Typ	0.5	0.5	pF	
				Max	—	—	pF	
	Switch Offset (NO)		I _F =5 mA (NO) I _F =5 mA (NC)	Min	—	—	μV	
				Typ	0.15	0.15	μV	
				Max	—	—	μV	
	Switch Offset (NC)		I _F =0 mA (NC) I _F =5 mA (NO)	Min	—	—	μV	
				Typ	0.1	0.1	μV	
Max				—	—	μV		

	Parameter	Symbol	Test Condition	Values	LH1502	LH1512	Units
T R A N S F E R	Input/Output Capacitance	C_{ISO}	$V_{ISO}=1\text{ V}$	Min	—	—	pF
				Typ	1.1	1.1	pF
				Max	—	—	pF
	Turn-on Time (NO)	t_{on}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	1.4	ms
				Max	NA	3.0	ms
	Turn-on Time (NC)	t_{on}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	1.2	ms
				Max	NA	3.0	ms
	Turn-off Time (NO)	t_{off}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	0.7	ms
				Max	NA	3.0	ms
	Turn-off Time (NC)	t_{off}	$I_F=10\text{ mA}$ $I_L=50\text{ mA}$	Min	NA	—	ms
				Typ	NA	2.0	ms
				Max	NA	3.0	ms
	Turn-on Time (NO)	t_{on}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	1.0	NA	ms
				Typ	3.2	NA	ms
				Max	6.0	NA	ms
	Turn-on Time (NC)	t_{on}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	1.0	NA	ms
				Typ	3.8	NA	ms
				Max	6.0	NA	ms
	Turn-off Time (NO)	t_{off}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	—	NA	ms
				Typ	1.6	NA	ms
				Max	3.0	NA	ms
	Turn-off Time (NC)	t_{off}	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	—	NA	ms
				Typ	0.8	NA	ms
				Max	3.0	NA	ms
	Transfer OFF Time (NC off to NO on)	$ttfr$	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	0	NA	μs
				Typ	800	NA	μs
				Max	—	NA	μs
	Transfer OFF Time (NO off to NC on)	$ttfr$	$I_F=10\text{ mA}$ $I_L=37.5\text{ mA}$ $V_L=150\text{ V}$	Min	0	NA	μs
				Typ	1500	NA	μs
				Max	—	NA	μs


A. LED Voltage vs. Temperature

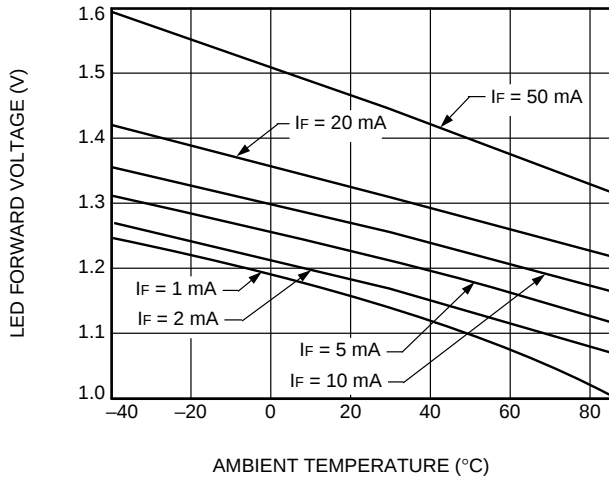


B. LED Dropout Voltage vs. Temperature

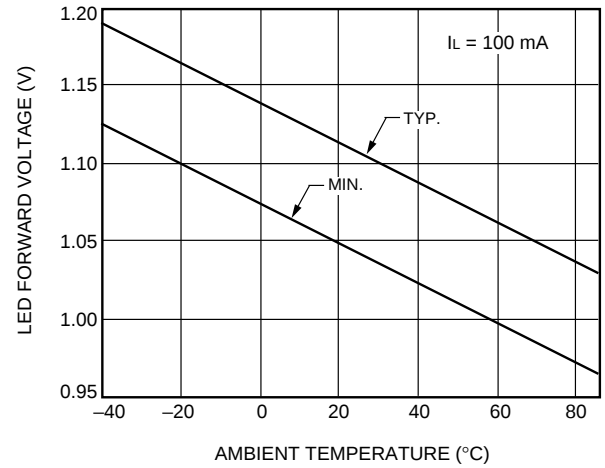


C. LED Current for Switch Turn-Off vs. Temperature

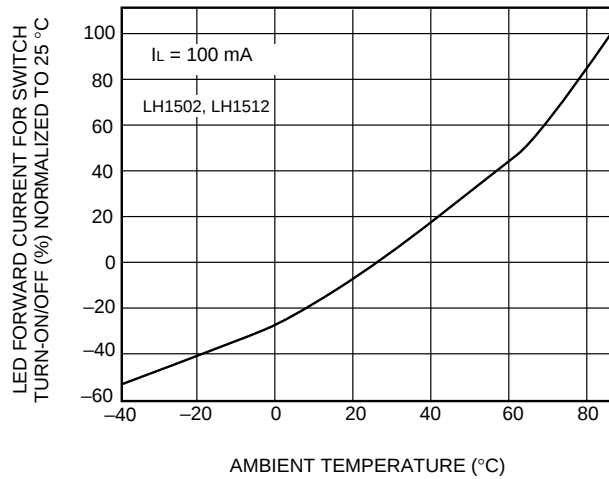


D. Current Limit vs. Temperature

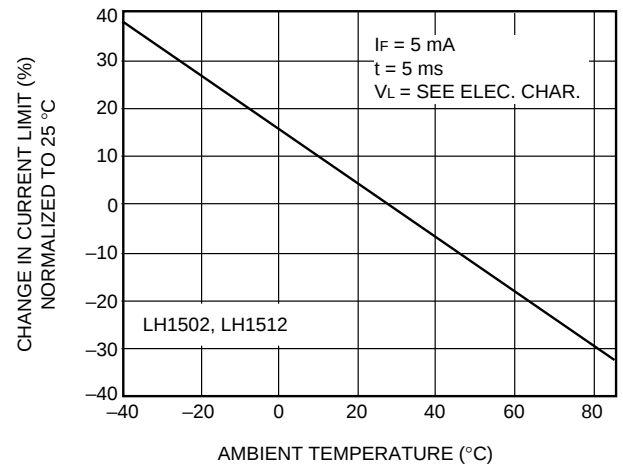


E. ON-Resistance vs. Temperature

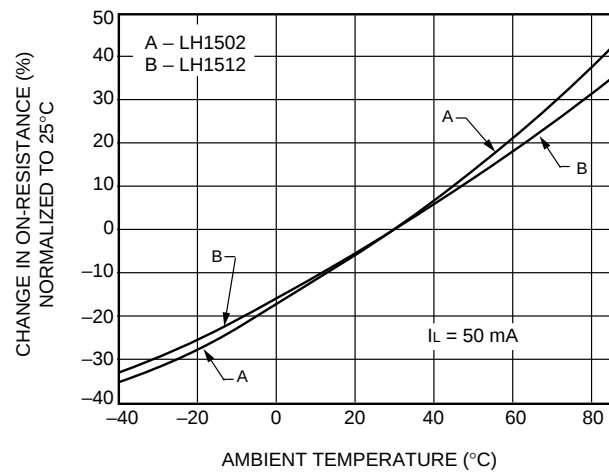


F. Variation in ON-Resistance vs. LED Current

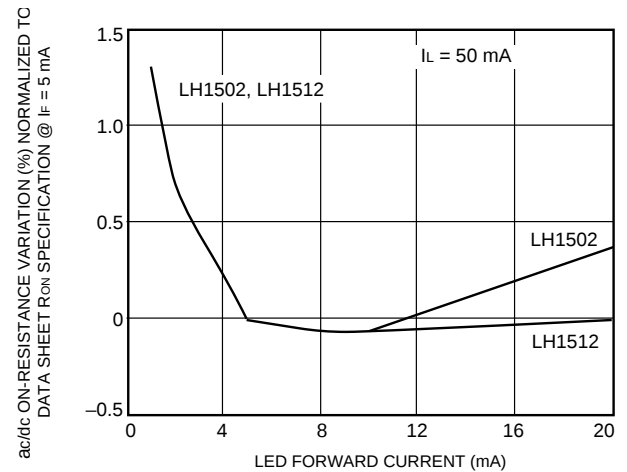


A. Switch Capacitance vs. Applied Voltage

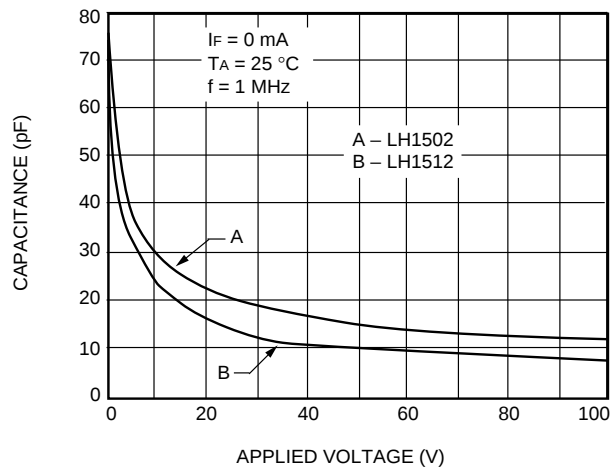


B. Insertion Loss vs. Frequency

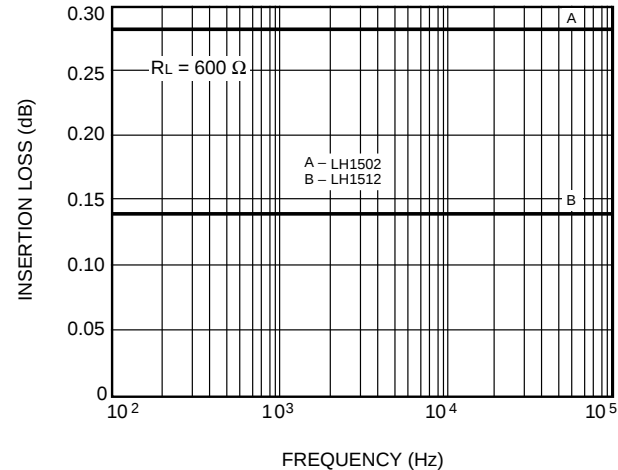


C. NO Output Isolation

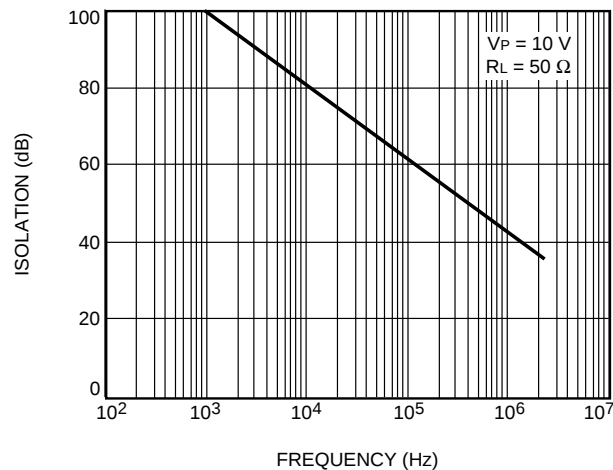


D. NC Output Isolation

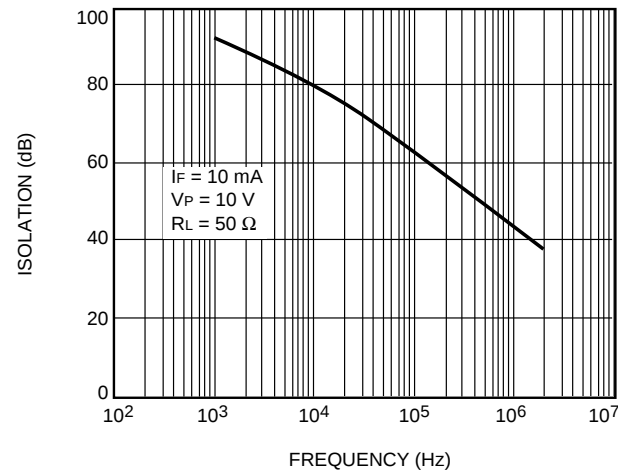


E. NO Leakage Current vs. Applied Voltage

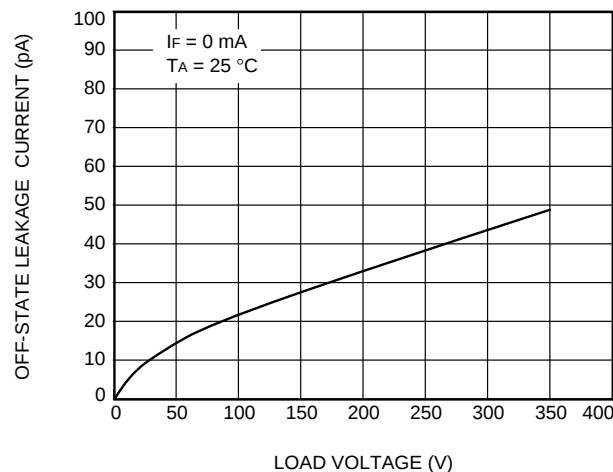


F. NO Leakage Current vs Applied Voltage @ Elevated Temperatures

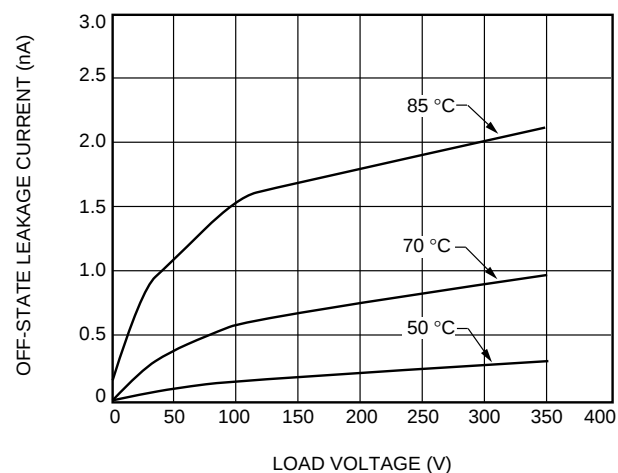


A. NC Leakage Current vs. Applied voltage @ 25°C

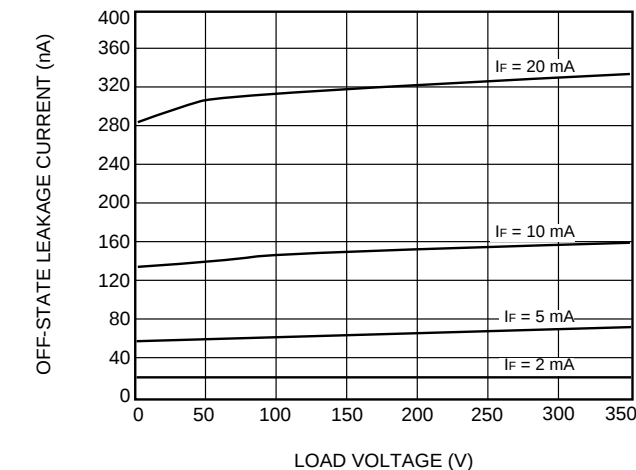


B. NC Leakage Current vs. Applied voltage @ 50°C

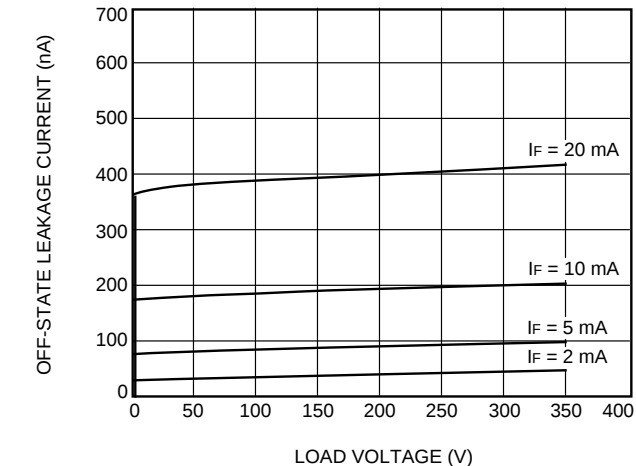


C. NC Leakage Current vs. Applied voltage @ 70°C

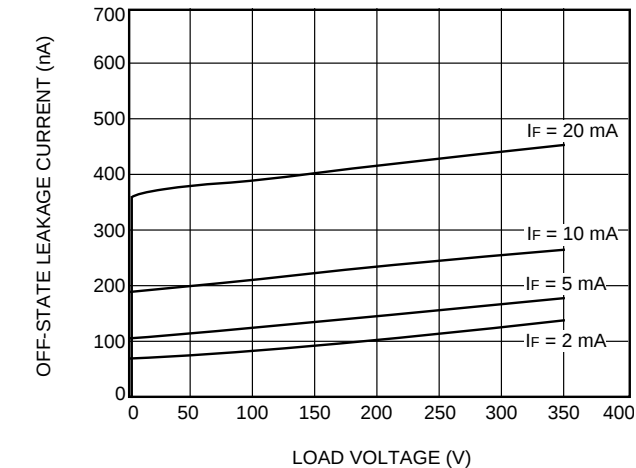


D. NC Leakage Current vs. Applied voltage @ 85°C

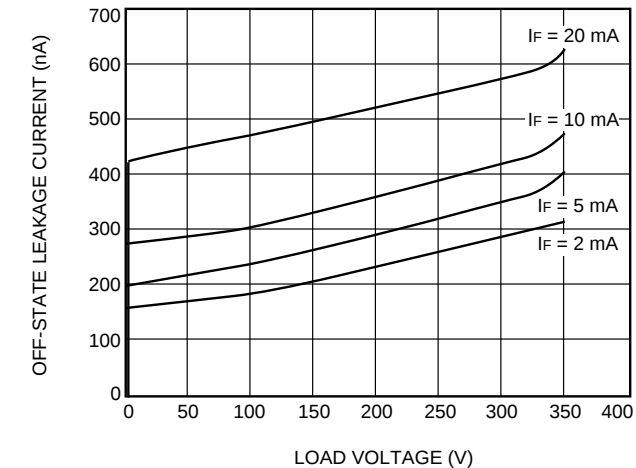


E. Switch Breakdown Voltage vs. Temperature

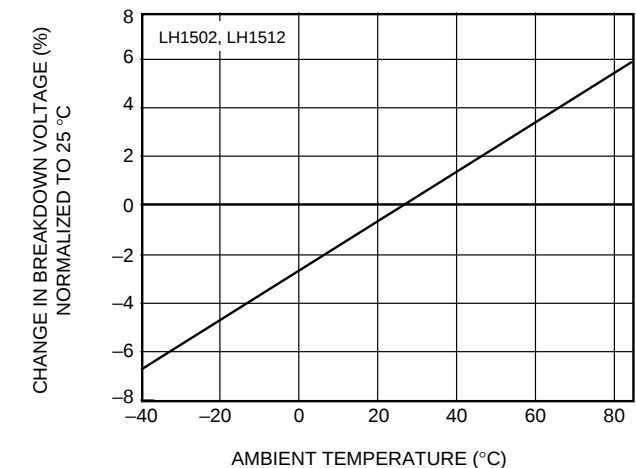


F. Switch Offset Voltage vs. Temperature

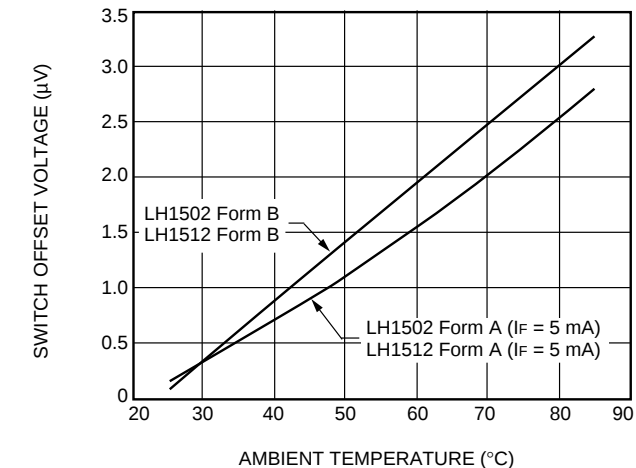


A. NO Switch Offset Voltage vs. LED Current

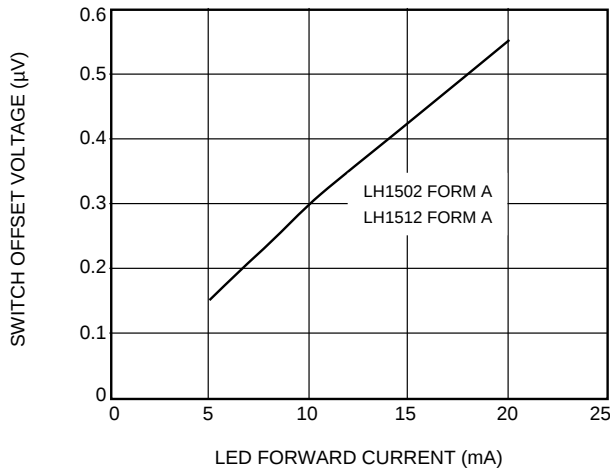


B. NO Turn-On Time vs. Temperature

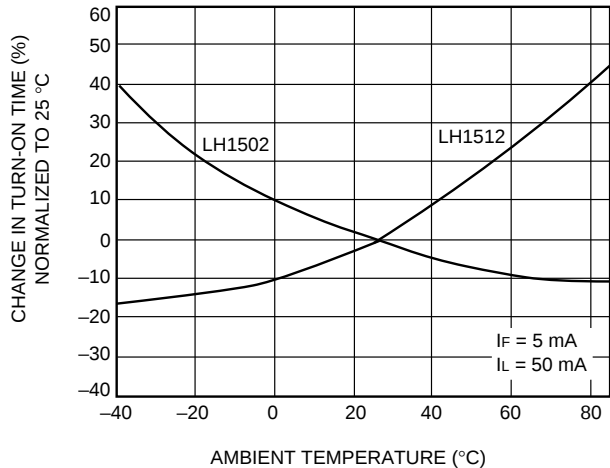


C. NO Turn-Off Time vs. Temperature

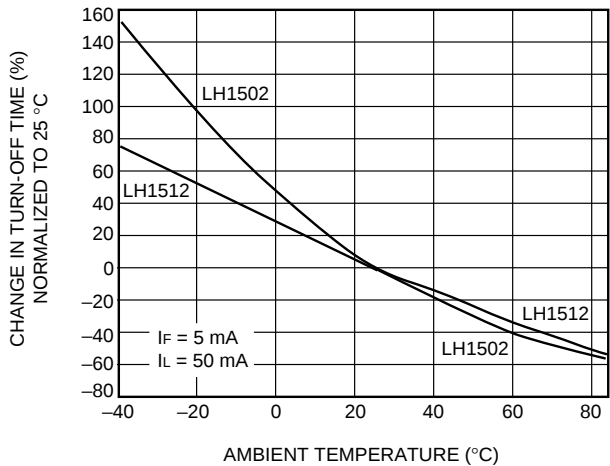


D. NC Turn-On/Off Time vs. Temperature

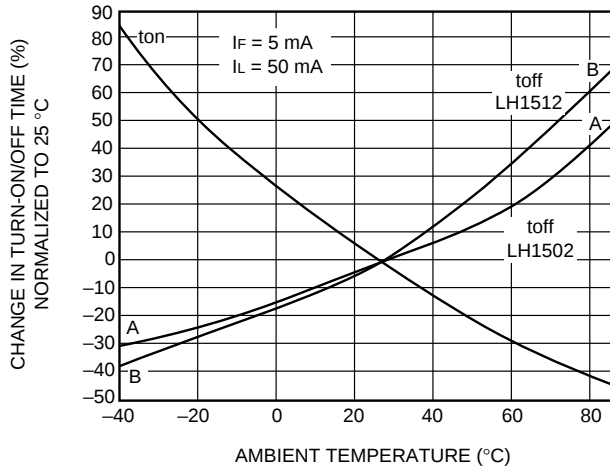


E. NO Turn-On Time vs. LED Current (LH1512)

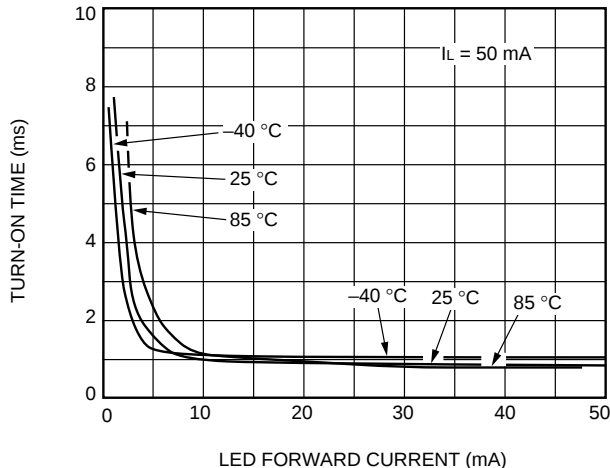


F. NC Turn-On Time vs. LED Current (LH1512)

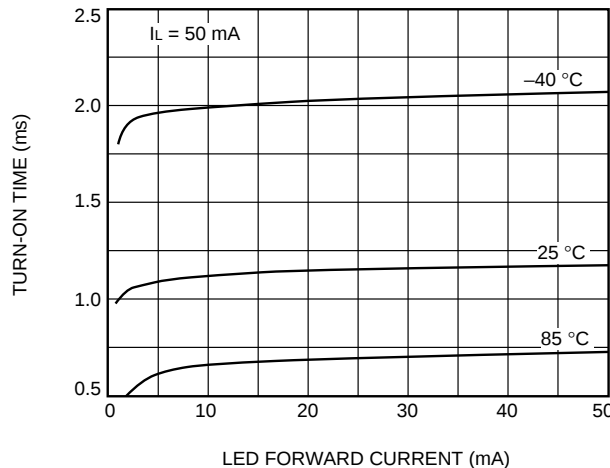


A. NO Turn-Off Time vs. LED Current (LH1512)

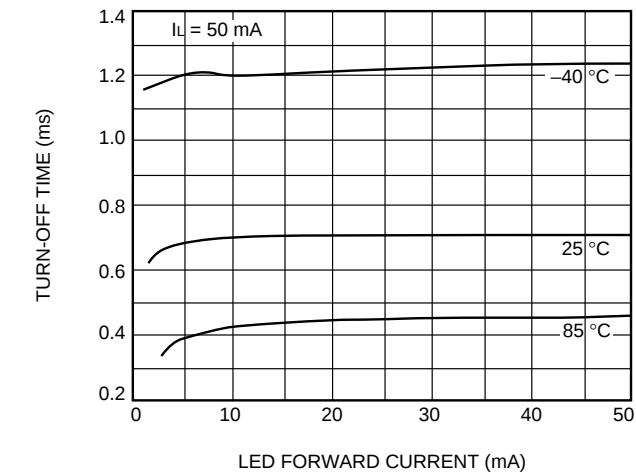

B. NC Turn-Off Time vs. LED Current (LH1512)

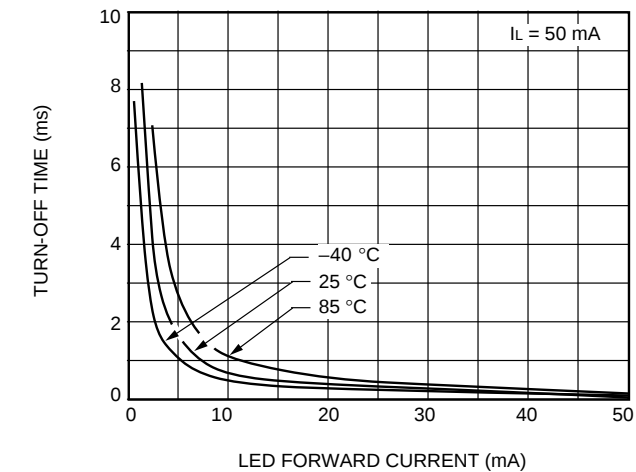

C. NC Turn-Off and NO Turn-ON Time vs. LED Current (LH1502)

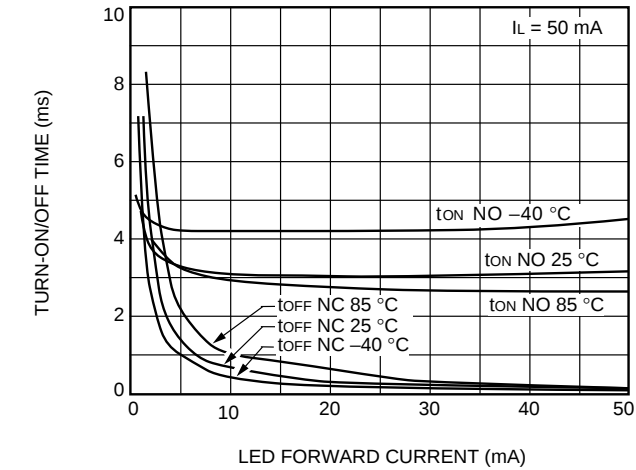

D. NO Turn-Off and NC Turn-ON Time vs. LED Current (LH1502)

