


Small Signal Diode



Features


- Wide zener voltage range selection : 2.4V to 36V
- Surface device type mounting
- Moisture sensitivity level 1
- Matte Tin(Sn) lead finish with Nickel(Ni) underplate
- Pb free version and RoHS compliant
- Halogen free

Mechanical Data

- Case :1206 standard package, molded plastic
- Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed:260°C/10s
- Polarity : Indicated by cathode band
- Weight :0.010 gram (approximately)

Ordering Information

Part No.	Package code	Package	Packing
BZS55B2V4~BZS55B36	RXG	1206	5K / 7" Reel




Dimensions	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	3.00	3.40	0.118	0.134
B	1.30	1.70	0.051	0.067
C	0.35	0.75	0.014	0.030
D	0.75	0.95	0.030	0.037

Pin Configuration



Suggested PAD Layout



Maximum Ratings and Electrical Characteristics


Rating at 25°C ambient temperature unless otherwise specified.

Maximum Ratings

Type Number	Symbol	Value	Units
Power Dissipation	P_D	500	mW
Forward Voltage $I_F=10mA$	V_F	1.5	V
Thermal Resistance (Junction to Ambient) (Note 1)	$R_{\theta JA}$	300	°C/W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150	°C

Notes:1. Valid provided that electrodes are kept at ambient temperature

Zener I vs. V Characteristics

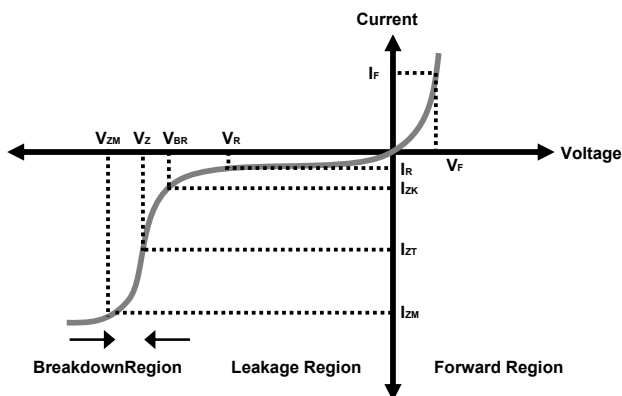

- V_{BR} : Voltage at I_{ZK}
- I_{ZK} : Test current for voltage V_{BR}
- Z_{ZK} : Dynamic impedance at I_{ZK}
- I_{ZT} : Test current for voltage V_Z
- V_Z : Voltage at current I_{ZT}
- Z_{ZT} : Dynamic impedance at I_{ZT}
- I_{ZM} : Maximum steady state current
- V_{ZM} : Voltage at I_{ZM}

Small Signal Diode
Electrical Characteristics

Ta = 25°C unless otherwise noted

V_F Forward Voltage = 1.5V Maximum @ I_F = 200 mA for all part numbers

Part Number	Device Marking	V _Z @ I _{ZT} (Volt)			I _{ZT} (mA)	Z _{zt} @ I _{ZT} (Ω) Max	I _{zk} (mA)	Z _{zk} @ I _{zk} (Ω) Max	I _R @ V _R (μA) Max	V _R (V)
		Nom	Min	Max						
BZS55B2V4	2V4	2.4	2.35	2.45	5	85	1.0	600	50	1.0
BZS55B2V7	2V7	2.7	2.65	2.75	5	85	1.0	600	10	1.0
BZS55B3V0	3	3.0	2.94	3.06	5	85	1.0	600	4	1.0
BZS55B3V3	3V3	3.3	3.23	3.37	5	85	1.0	600	2	1.0
BZS55B3V6	3V6	3.6	3.53	3.67	5	85	1.0	600	2	1.0
BZS55B3V9	3V9	3.9	3.82	3.98	5	85	1.0	600	2	1.0
BZS55B4V3	4V3	4.3	4.21	4.39	5	80	1.0	600	1	1.0
BZS55B4V7	4V7	4.7	4.61	4.79	5	70	1.0	600	0.5	1.0
BZS55B5V1	5V1	5.1	5.00	5.20	5	50	1.0	550	0.1	1.0
BZS55B5V6	5V6	5.6	5.49	5.71	5	30	1.0	450	0.1	1.0
BZS55B6V2	6V2	6.2	6.08	6.32	5	10	1.0	200	0.1	2.0
BZS55B6V8	6V8	6.8	6.66	6.94	5	8	1.0	150	0.1	3.0
BZS55B7V5	7V5	7.5	7.35	7.65	5	7	1.0	50	0.1	5.0
BZS55B8V2	8V2	8.2	8.04	8.36	5	7	1.0	50	0.1	6.2
BZS55B9V1	9V1	9.1	8.92	9.28	5	10	1.0	50	0.1	6.8
BZS55B10	10	10	9.80	10.20	5	15	1.0	70	0.1	7.5
BZS55B11	11	11	10.78	11.22	5	20	1.0	70	0.1	8.2
BZS55B12	12	12	11.76	12.24	5	20	1.0	90	0.1	9.1
BZS55B13	13	13	12.74	13.26	5	26	1.0	110	0.1	10.0
BZS55B15	15	15	14.70	15.30	5	30	1.0	110	0.1	11.0
BZS55B16	16	16	15.68	16.32	5	40	1.0	170	0.1	12.0
BZS55B18	18	18	17.64	18.36	5	50	1.0	170	0.1	13.0
BZS55B20	20	20	19.60	20.40	5	55	1.0	220	0.1	15.0
BZS55B22	22	22	21.56	22.44	5	55	1.0	220	0.1	16.0
BZS55B24	24	24	23.52	24.48	5	80	1.0	220	0.1	18.0
BZS55B27	27	27	26.46	27.54	5	80	1.0	220	0.1	20.0
BZS55B30	30	30	29.40	30.60	5	80	1.0	220	0.1	22.0
BZS55B33	33	33	32.34	33.66	5	80	1.0	220	0.1	24.0
BZS55B36	36	36	35.28	36.72	5	80	1.0	220	0.1	27.0

Notes:

1. The Zener Voltage (V_Z) is tested under pulse condition of 10ms
2. The device numbers listed have a standard tolerance on the nominal zener voltage of ±2%.
3. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances,
4. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the DC zener current

Small Signal Diode

Rating and Sharacteristic Curves

FIG 1 Typical Forward Characteristics

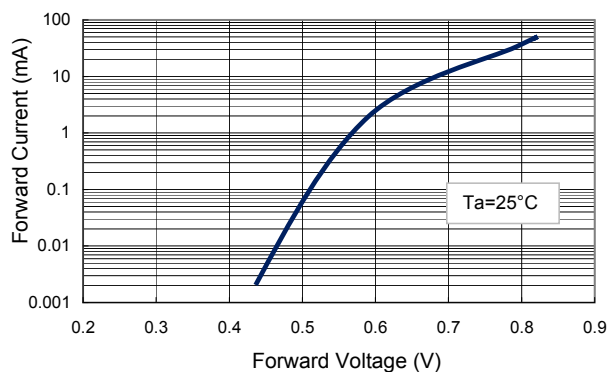


FIG 2 Zener Breakdown Characteristics

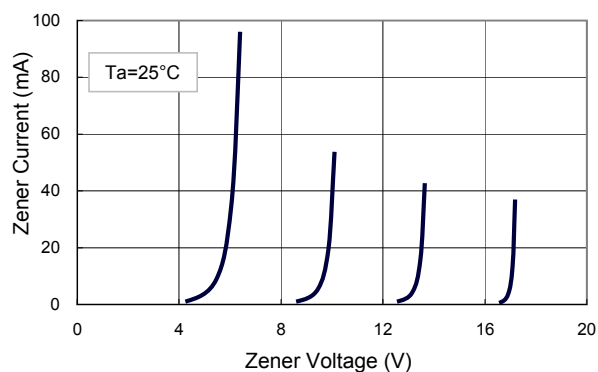


FIG 3 Zener Breakdown

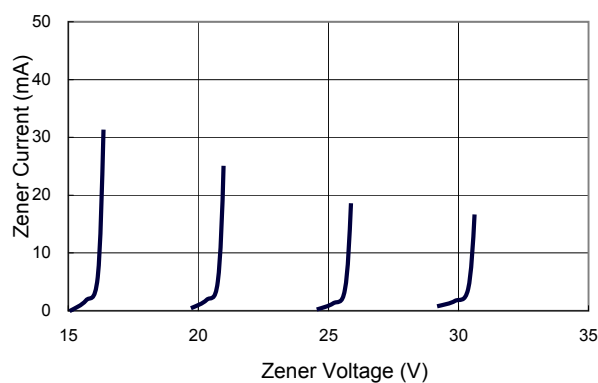


FIG 4 Admissible Power Dissipation Curve

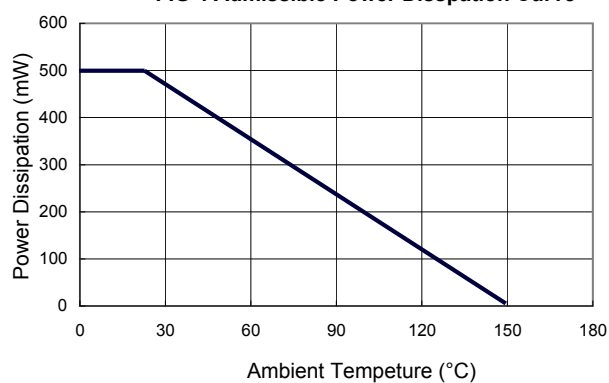


FIG 5 Typical Capacitance

