




MUR1005CT thru MUR1040CT

Glass Passivated Super Fast Rectifiers
Reverse Voltage 50 to 400 Volts Forward Current 10.0 Amperes

Features


- ◆ Low power loss, high efficiency
- ◆ Low forward voltage, high current capability
- ◆ High surge capacity
- ◆ Super fast recovery times, high voltage



TO-220AB

Mechanical Data

- ◆ Case: TO-220AB full molded plastic package
- ◆ Terminals: Lead solderable per MIL-STD-202, Method 208
- ◆ Polarity: As marked
- ◆ Standard packaging: Any
- ◆ Weight: 0.08 ounces, 2.24 grams

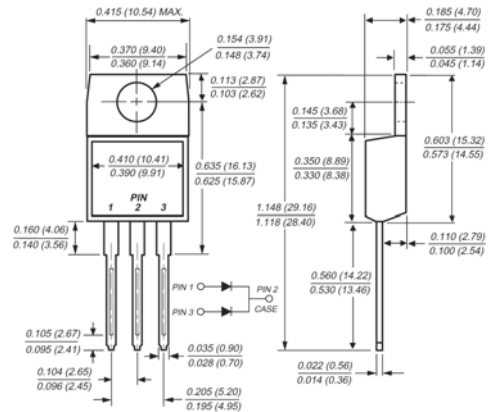

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


Parameter	Symbol	MUR 1005CT	MUR 1010CT	MUR 1015CT	MUR 1020CT	MUR 1030CT	MUR 1040CT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	Volts
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	Volts
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	Volts
Maximum average forward rectified current at T _C =100°C	I _{F(AV)}	10.0						Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0						Amps
Maximum instantaneous forward voltage at 5.0A per element	V _F	0.95				1.3		Volts
Maximum DC reverse current @T _C =25°C at rated DC blocking voltage	I _R	10.0 500						µA
Maximum reverse recovery time at I _F =0.5A, I _R =1.0A, I _T =0.25A	t _{rr}	35				50		nS
Typical junction capacitance at 4.0V, 1MHz	C _J	62						pF
Typical thermal resistance	R _{θJC}	3.0						°C/W
Operating junction and storage temperature range	T _J *, T _{STG}	-55 to +150						°C

Notes: 1. Pulse test: Pulse width 300 usec, Duty cycle 2%

RATINGS AND CHARACTERISTIC CURVES


(T_A = 25°C unless otherwise noted)

Figure 1
Typical Forward Characteristics

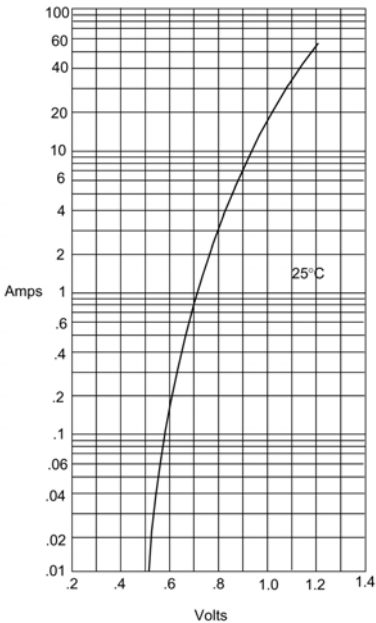


Instantaneous Forward Current - Amperes
Instantaneous Forward Voltage - Volts

Figure 2
Typical Reverse Characteristics

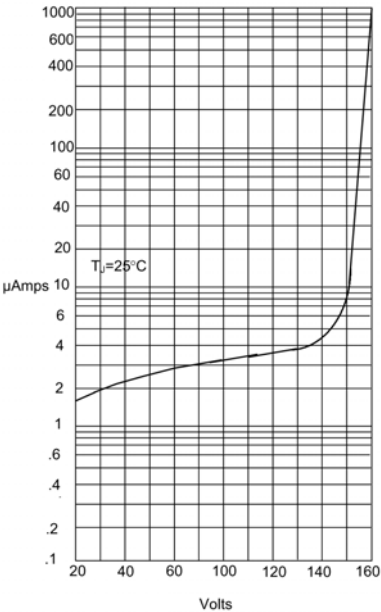

Instantaneous Reverse Leakage Current - MicroAmperes
Percent Of Rated Peak Reverse Voltage - Volts


Figure 3
Forward Derating Curve

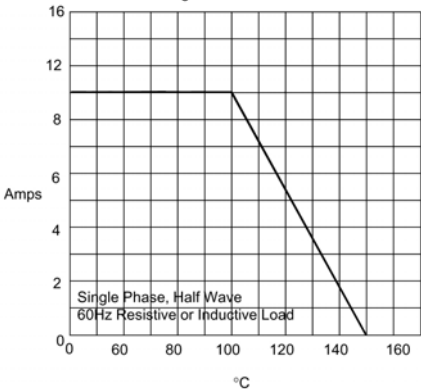

Single Phase, Half Wave
60Hz Resistive or Inductive Load

Average Forward Rectified Current - Amperes
Case Temperature - °C

Figure 4
Maximum Non-Repetitive Forward Surge Current

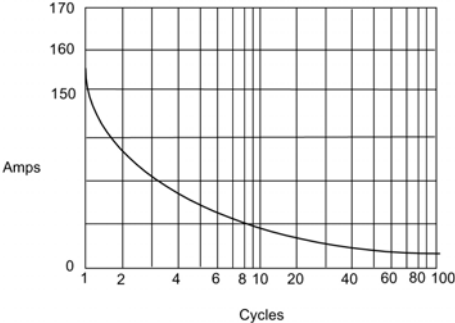

Peak Forward Surge Current - Amperes
Number Of Cycles At 60Hz - Cycles