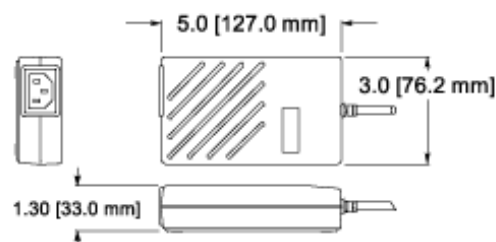


MW**Medical Grade - Single Output Regulated Power Supplies****Features:**

Wide Range AC input
Fully enclosed plastic case
Fully regulated output
High Efficiency
Warranty: 1 year

Environmental

Operating temperature.....0° C to 40° C
Storage temperature.....-55° C to 85° C
Weight: 0.7 lbs

EMI

Meets FCC class B, CISPR 22 class B

Safety

UL 2601
CSA 601
IEC 601-1

Polarity: COM  +V

Electrical specifications**Input**

Voltage.....100-240VAC
Current.....1 A @ 115 VAC
Frequency.....47-63 Hz
A/C cord.....not included
Input connector.....3 Pin IEC 320 receptacle
Leakage.....100 mA maximum

Output

Line regulation.....TYP +/-1%
Load regulation.....5% Max
Set point.....+/-5% of rated output
Hold up time.....20 ms min. at full load 115 V
Over voltage protection.....Built-in
Over current protection.....Built-in
Short circuit protection.....Pulsing mode, auto recovery
Transient response.....2 ms for 50% load change typ
Ripple/noise(Vp-p).....0.5%
Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

Output Electrical Specifications

ModelNo.	Voltage	Power	Current
MW4012-760	12	40	3.3A
MW4015-760	15	40	2.6A
MW4018-760	18	40	2.2A
MW4024-760	24	40	1.67A