



AXIAL SILASTIC GUARD JUNCTION STANDARD RECTIFIER

BY251 THRU BY255

VOLTAGE RANGE
CURRENT


200 to 1300 Volts
3.0 Ampere

FEATURES

- Low coat construction
- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.042 ounce, 1.19 grams

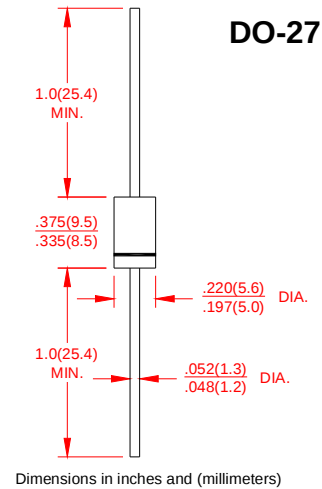

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	BY251	BY252	BY253	BY254	BY255	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	200	400	600	800	1300	Volts
Maximum RMS Voltage		V _{RMS}	140	280	420	560	910	Volts
Maximum DC Blocking Voltage		V _{DC}	200	400	600	800	1300	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 75 °C		I _(AV)	3.0					Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	125					Amps
Maximum Instantaneous Forward Voltage @ 3.0A		V _F	1.1					Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	T _A = 25 °C	I _R	5.0					μA
	T _A = 100 °C		50					
Maximum Full Load Reverse Current, full cycle average 0.375”(9.5mm)lead length at T _L =75 °C		I _{R(AV)}	500					μA
Typical Junction Capacitance (Note 1)		C _J	40					pF
Typical Thermal Resistance (Note 2)		R _{θJA}	30					°C/W
Operating Junction Temperature Range		T _J	-55 to +150					°C
Storage Temperature Range		T _{STG}	-55 to +150					°C

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
2. Thermal Resistance from junction to ambient at .375"(9.5mm) lead length, P.C.board mounted.



AXIAL SILASTIC GUARD JUNCTION STANDARD RECTIFIER

BY251 THRU BY255

VOLTAGE RANGE
CURRENT

200 to 1300 Volts
3.0 Ampere

RATING AND CHARACTERISTIC CURVES BY251 Thru BY255

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

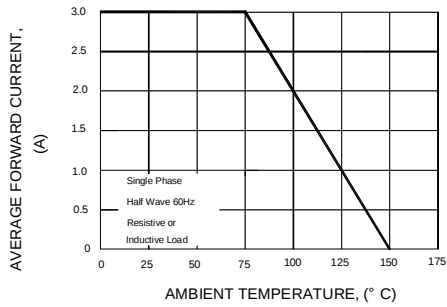


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

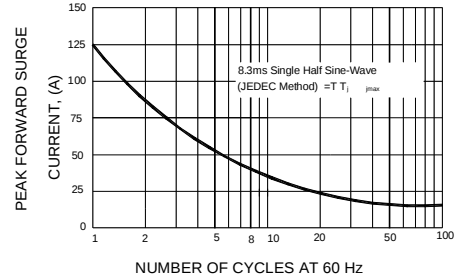


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

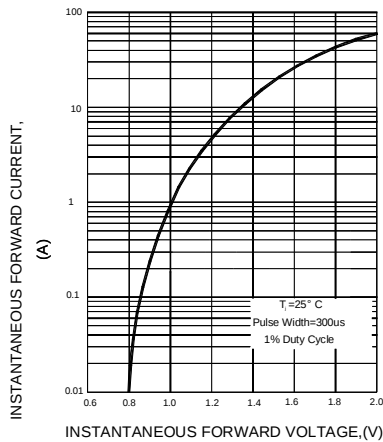


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

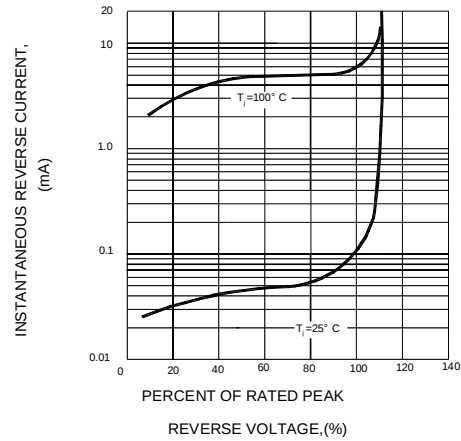


FIG.5-TYPICAL JUNCTION CAPACITANCE

