

BY251 thru BY255

MEDIUM CURRENT PLASTIC RECTIFIER



**CHENG-YI
ELECTRONIC**



FEATURE


- High surge current capability
- Plastic package has underwriters laboratory Flammability classification 94V-O
- Low leakage
- Void-free molded in DO-201AD plastic package
- High current operation of 3 Amperse at $T_A=95^{\circ}\text{C}$ with no thermal runaway
- Exceeds enviromental standard of MIL-STD-19500/228

MECHANICAL DATA

- Case:JEDEC D0-201AD molded plastic
- Trminals:plated axials leads ,solderable per MIL-STD-750, Method 2026
- Polarity:Color band denotes cathode
- Weight:0.04 ounce, 1.1gram
- Mounting Position:Any

VOLTAGE RANGE-200 TO 1300 Volts
CURRENT -3.0 Amperes

DO-201AD

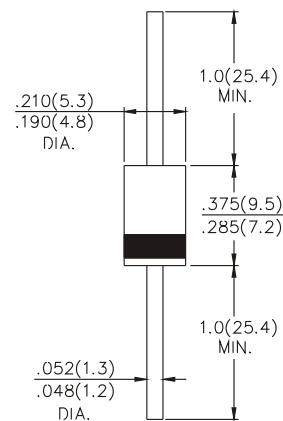

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

		BY251	BY252	BY253	BY254	BY255	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1300	V
Maximum RMS Voltage	V_{RMS}	140	280	420	560	910	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1300	V
Maximum Average Forward Rectified Current .375", (9.5mm) lead lengths at $T_A=95^{\circ}\text{C}$	I_{AV}	3.0					A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100.0					A
Maximum Instantaneous Forward Voltage $T_J = 25^{\circ}\text{C}$ at 3.0A $T_J = 100^{\circ}\text{C}$	V_F	1.1 1.0					V
Maximum DC Reverse Current $T_A = 25^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_A = 100^{\circ}\text{C}$	I_R	5.0 500					μ A
Typical Junction Capacitance (Note 2) $T_J = 25^{\circ}\text{C}$	C_J	28.0					pF
Typical Reverse Recovery Time (Note 3)	T_{RR}	2.5					μ S
Typical Thermal Resistance (Note1)	$T \theta_{JA}$	15.0					$^{\circ}\text{C} / \text{W}$
Operating Junction Temperature Range	T_J	-55 to +150					$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150					$^{\circ}\text{C}$

Notes : 1. Thermal Resistance from Junction to applied at ambient .375" (9.5mm) lead lengths, P.C. Board mounted.

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

3. Reverse Recovery Test Conditions : $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.

BY251 thru BY255

MEDIUM CURRENT PLASTIC RECTIFIER



CHENG-YI
ELECTRONIC

RATING AND CHARACTERISTICS CURVES BY251 THRU BY255

Fig.1 - FORWARD CURRENT DERATING CURVE

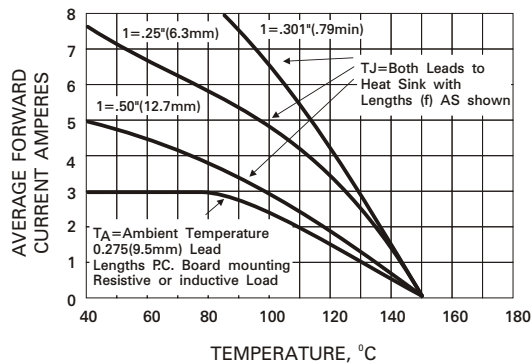


Fig.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

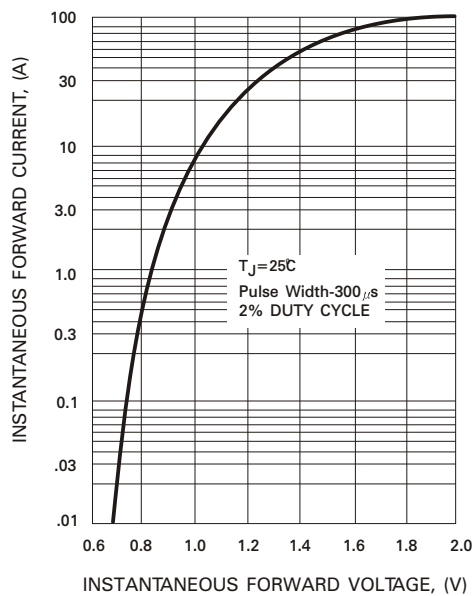


Fig.2 - MAXIMUM PEAK FORWARD SURGE CURRENT

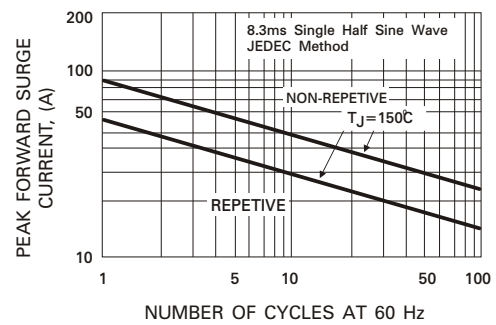


Fig.4 - TYPICAL JUNCTION CAPACITANCE

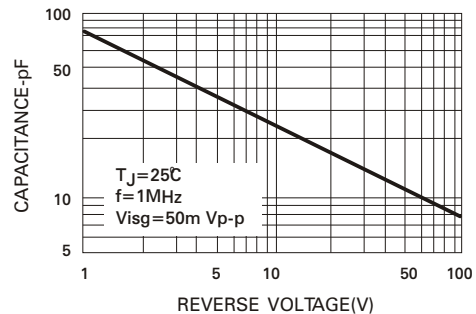


Fig.5 - TYPICAL REVERSE CHARACTERISTICS

